


4

3





2

1

LOC J	DIST —	REVISIONS 變更					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			R	REVISED PER ECO—15—002720	02MAR2015	AP	SB

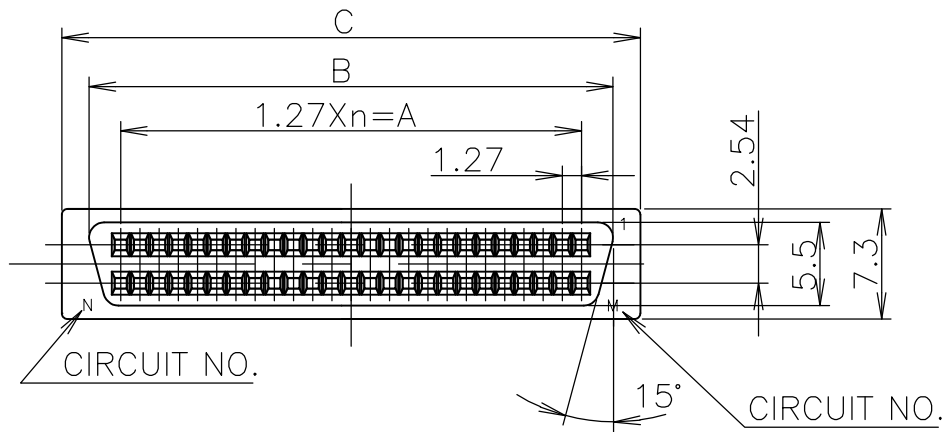

- 1 MATERIAL AND FINISH
PLUG HOUSING
; THERMOPLASTIC (UL94V-0) COLOR:BLACK
REC. CONTACT
; COPPER ALLOY FINISH,OVER NICKEL
MATING END:0.0002 MIN. OR
0.00076 MIN. GOLD
TERMINATION END:TIN
OVER SEALING TREATMENT.
- 2 P.C.B. LAYOUT AND P.C.B. TREATMENT(REF.)
USE A P.C.B. SURFACE ARE TREATED WITH SOLDER RESIST.
- 3 KINK POSITIONS(4 POSITIONS).
- 4 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER
D.RENAUD/D.SINISI

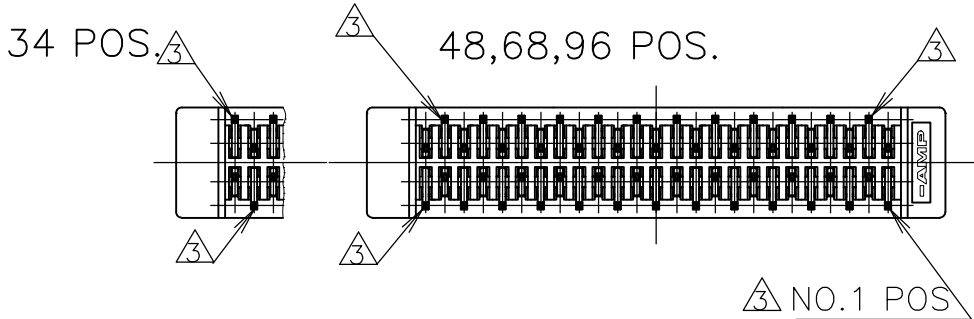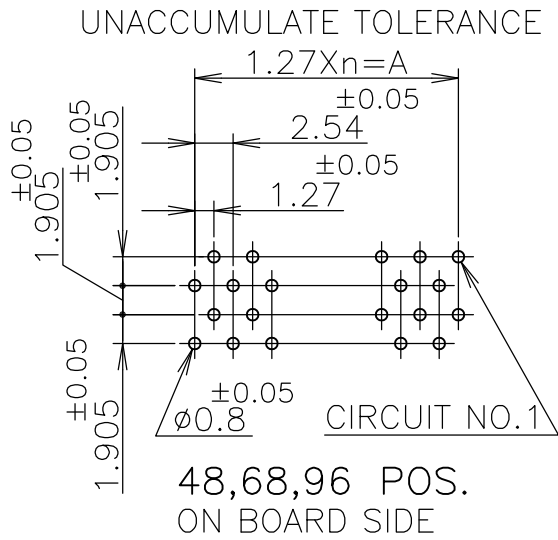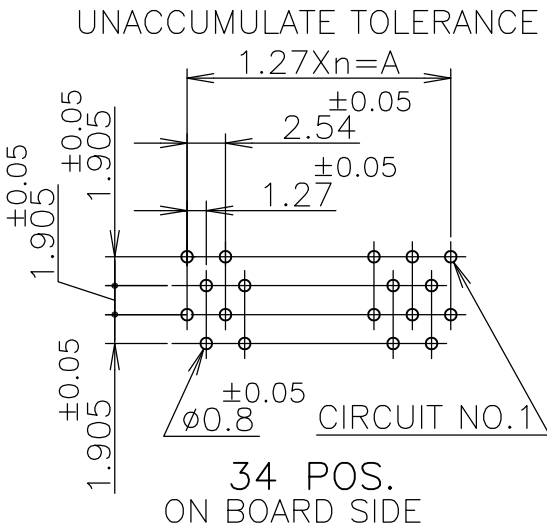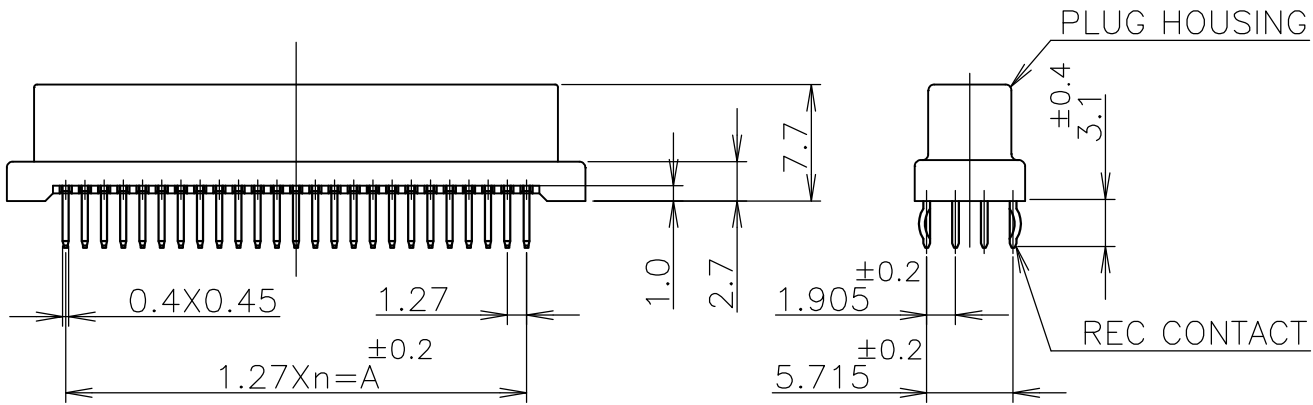

4	OBSOLETE	Au PL. 0.00076 MIN.	96	49	59.69	63.86	71.00	47	96	6—	—8	
			68	35	41.91	46.08	53.22	33	68	6—	—7	
			48	25	29.21	33.38	40.52	23	48	6—	—6	
			34	18	20.32	24.49	31.63	16	34	6—	—5	
4	OBSOLETE	Au PL. 0.0002 MIN.	96	49	59.69	63.86	71.00	47	96		—8	
			68	35	41.91	46.08	53.22	33	68		—7	
			48	25	29.21	33.38	40.52	23	48		—6	
			34	18	20.32	24.49	31.63	16	34	—5174681—	—5	
		REMARK	N	M	A		B	C	n	POS.	PART NO.	
			CIRCUIT NO.		DIMENSION							

GENERAL TOLERANCE
一般公差

10 ≥ : ±0.2
30 ≥ > 10: ±0.25
100 ≥ > 30: ±0.3
ANGLES: ±3°

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
単位: 耗
mm

TOLERANCES UNLESS
OTHERWISE SPECIFIED:
一般公差

0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -
FINISH
仕上

MATERIAL
材料

DWN
T.KAWAMAE
18JAN05

CHK
I.ENOMOTO
18JAN05

APVD
I.ENOMOTO
18JAN05

PRODUCT SPEC
製品規格
108-60036

APPLICATION SPEC
取付適用規格

WEIGHT

CUSTOMER DRAWING

TE Connectivity

NAME
名称
PLUG ASSY VERTICAL (W/KINK)
AMPLIMITE .050 SERIES I B-TO-B CONN.

SIZE
A3

CAGE CODE
00779

DRAWING NO
番号
C-5174681

RESTRICTED TO
—

SCALE
尺度
2:1

SHEET
1 OF 1

REV
R

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[6-5174681-7](#)