

Interface module - VIP-3/PT/RJ45 - 2904290

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



VARIOFACE module with push-in connection and RJ45 connector



Key Commercial Data

Packing unit	1 pc
Weight per Piece (excluding packing)	92.7 g
Custom tariff number	85369010
Country of origin	United States

Technical data

Dimensions

Width	26.6 mm
Height	75.8 mm
Depth	63 mm

Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

General

Max. perm. operating voltage	48 V AC/DC
Max. perm. current (per branch)	1 A
Number of positions	8
Status display	No
Mounting position	any
Standards/regulations	EN 50178

Interface module - VIP-3/PT/RJ45 - 2904290

Technical data

Connection data for connection 1

Connection name	Field level
Connection method	Push-in connection
Stripping length	8 mm
Conductor cross section solid	0.14 mm² ... 2.5 mm²
Conductor cross section flexible	0.14 mm² ... 2.5 mm²
Conductor cross section AWG	26 ... 14

Connection data for connection 2

Connection name	Controller level
Connection method	RJ45 socket
Number of connections	1
Number of positions	8

Standards and Regulations

Connection in acc. with standard	CSA
Standards/regulations	EN 50178

Classifications

eCl@ss

eCl@ss 4.0	27250313
eCl@ss 4.1	27250313
eCl@ss 5.0	27250313
eCl@ss 5.1	27250313
eCl@ss 6.0	27242608
eCl@ss 7.0	27141152
eCl@ss 8.0	27141152
eCl@ss 9.0	27141152

ETIM

ETIM 3.0	EC001604
ETIM 4.0	EC001604
ETIM 5.0	EC002780

UNSPSC

UNSPSC 6.01	30211824
UNSPSC 7.0901	39121421
UNSPSC 11	39121421
UNSPSC 12.01	39121421

Interface module - VIP-3/PT/RJ45 - 2904290

Classifications

UNSPSC

UNSPSC 13.2	39121421
-------------	----------

Approvals

Approvals

Approvals

CSA / UL Recognized / cUL Recognized / EAC / EAC / EAC / cULus Recognized

Ex Approvals

Approvals submitted

Approval details

CSA 	
mm²/AWG/kcmil	26-14
Nominal current I _N	1 A
Nominal voltage U _N	48 V

UL Recognized 	
mm²/AWG/kcmil	26-14
Nominal current I _N	1 A
Nominal voltage U _N	48 V

cUL Recognized 	
mm²/AWG/kcmil	26-14

Interface module - VIP-3/PT/RJ45 - 2904290

Approvals

Nominal current IN	1 A
Nominal voltage UN	48 V


EAC

EAC

EAC

cULus Recognized 

Drawings

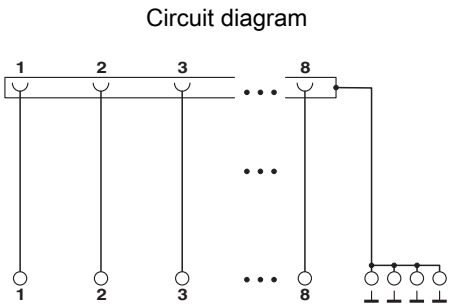

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phoenix Contact:](#)

[2904290](#)