





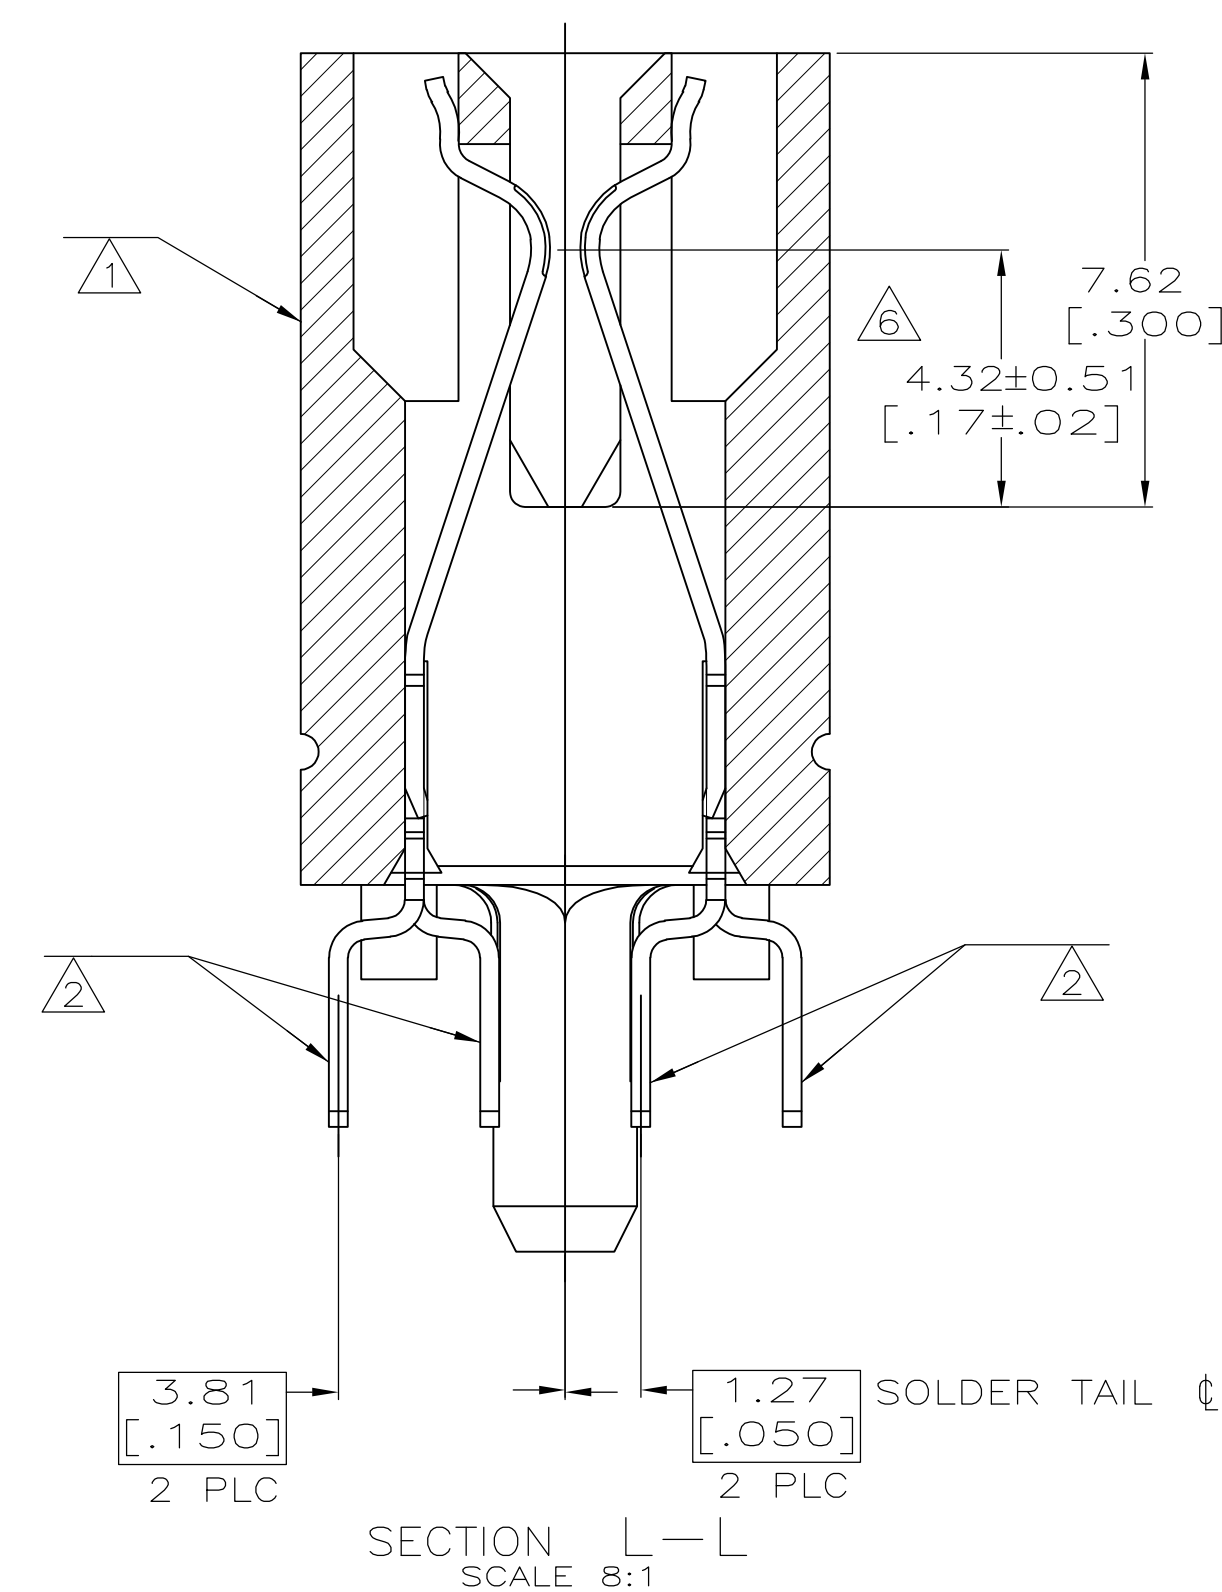



SEE SHEET 2 FOR HOLE PATTERN

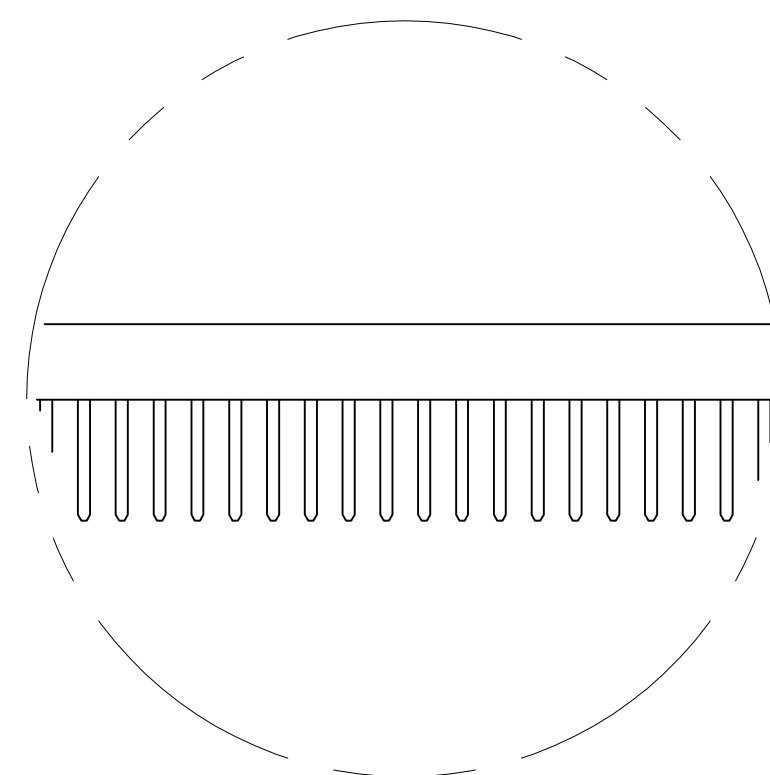


OBSELETE, SUPERSEDED BY -4 —
⁹ SUPERSEDED BY 5145165-2
 OBSELETE —

3.56[.140]	$\frac{5}{16}$	1-145165-2
3.17[.125]	$\frac{5}{16}$	145165-8
2.54[.100]	$\frac{5}{16}$	145165-4
2.54[.100]	$\frac{5}{16}$	145165-3
2.54[.100]	$\frac{4}{16}$	145165-2
2.54[.100]	$\frac{3}{16}$	145165-1
W	FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R BROWN 6/12/95 CHK M BOWERS 6/12/95 APVD _____		 TE Connectivity	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± 0.25[.01] 4 PLC ± 0.13[.005] 5 PLC ± - 2"		NAME CONNECTOR ASSEMBLY, 92 DUAL POSITION, .050 SERIES,	
		PRODUCT SPEC 108-14034 APPLICATION SPEC 114-26012		SIZE A1	
MATERIAL 		FINISH 		CAGE CODE 00779	
				DRAWING NO 145165	
				RESTRICTED TO -	
CUSTOMER DRAWING		SCALE 4:1		SHEET 1 of 2	
				REV H2	

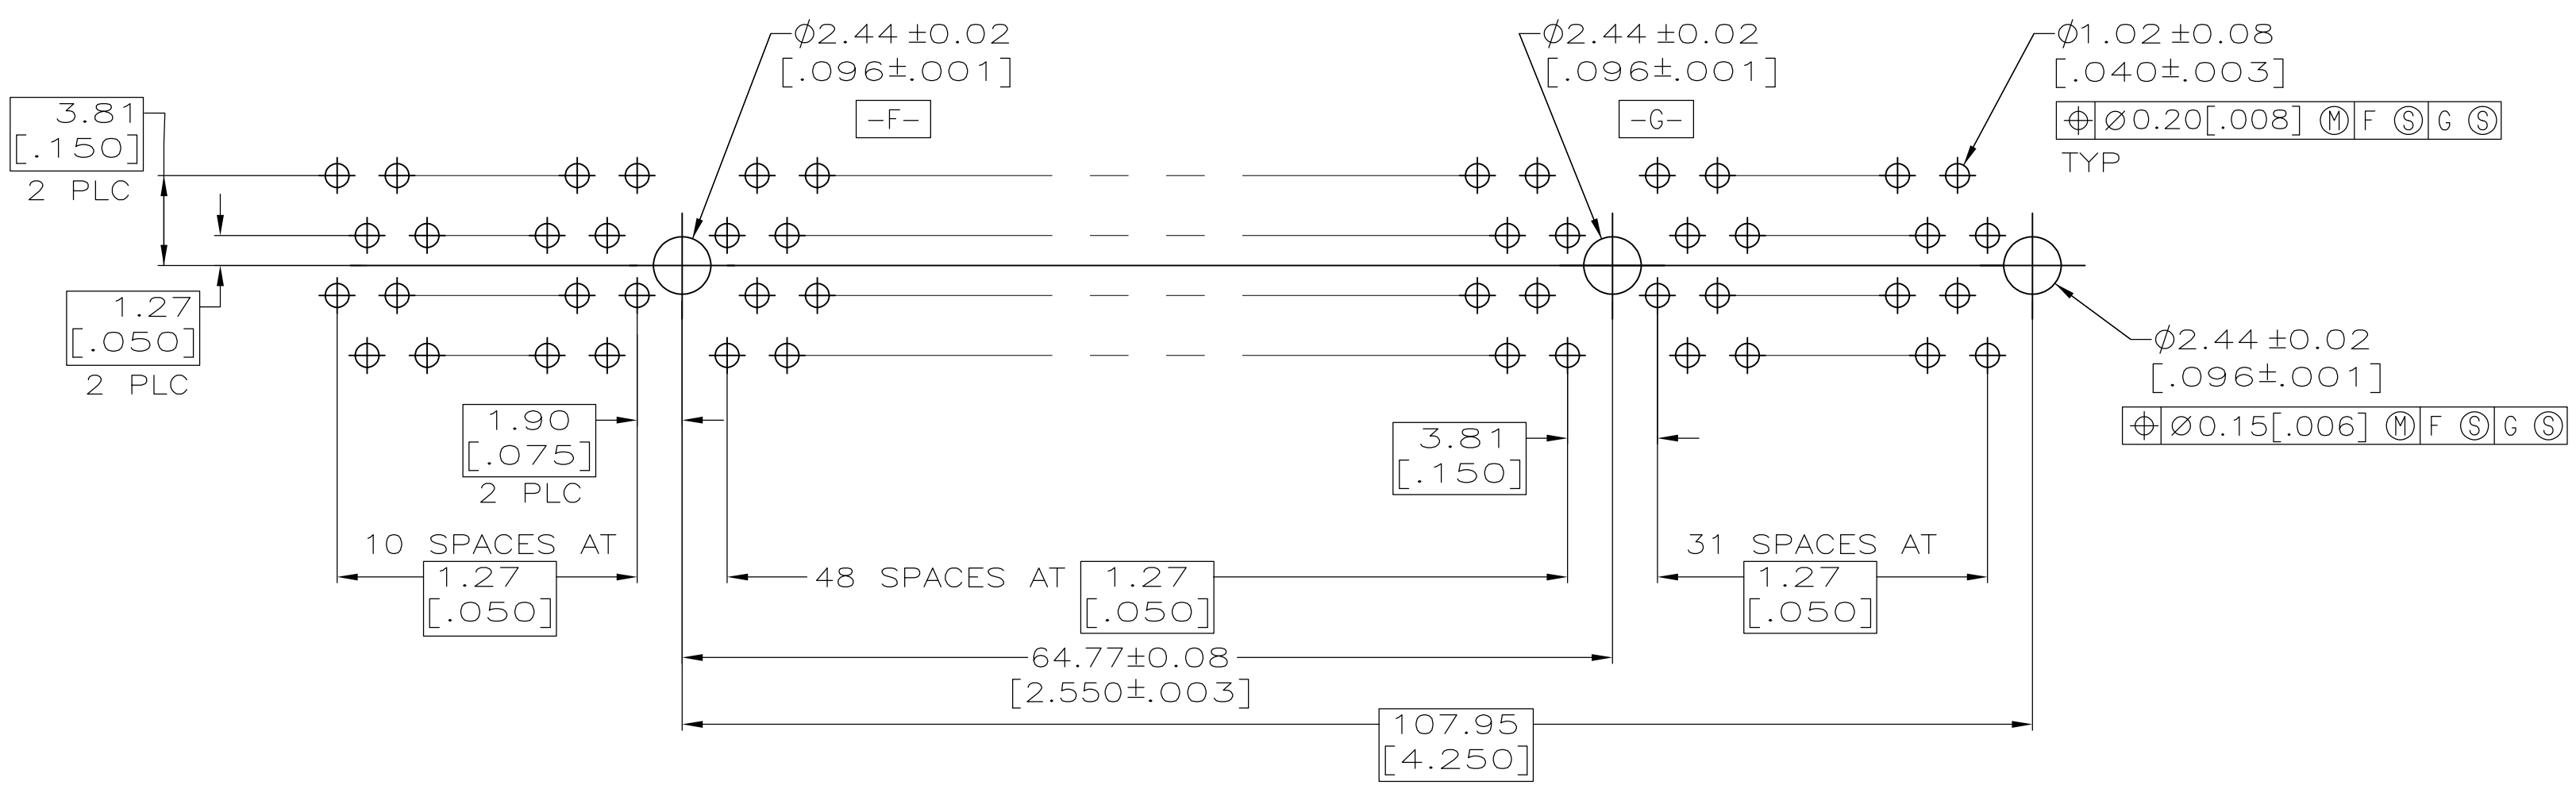

RECOMMENDED CONNECTOR MOUNTING HOLE PATTERN
(CONNECTOR SIDE SHOWN)

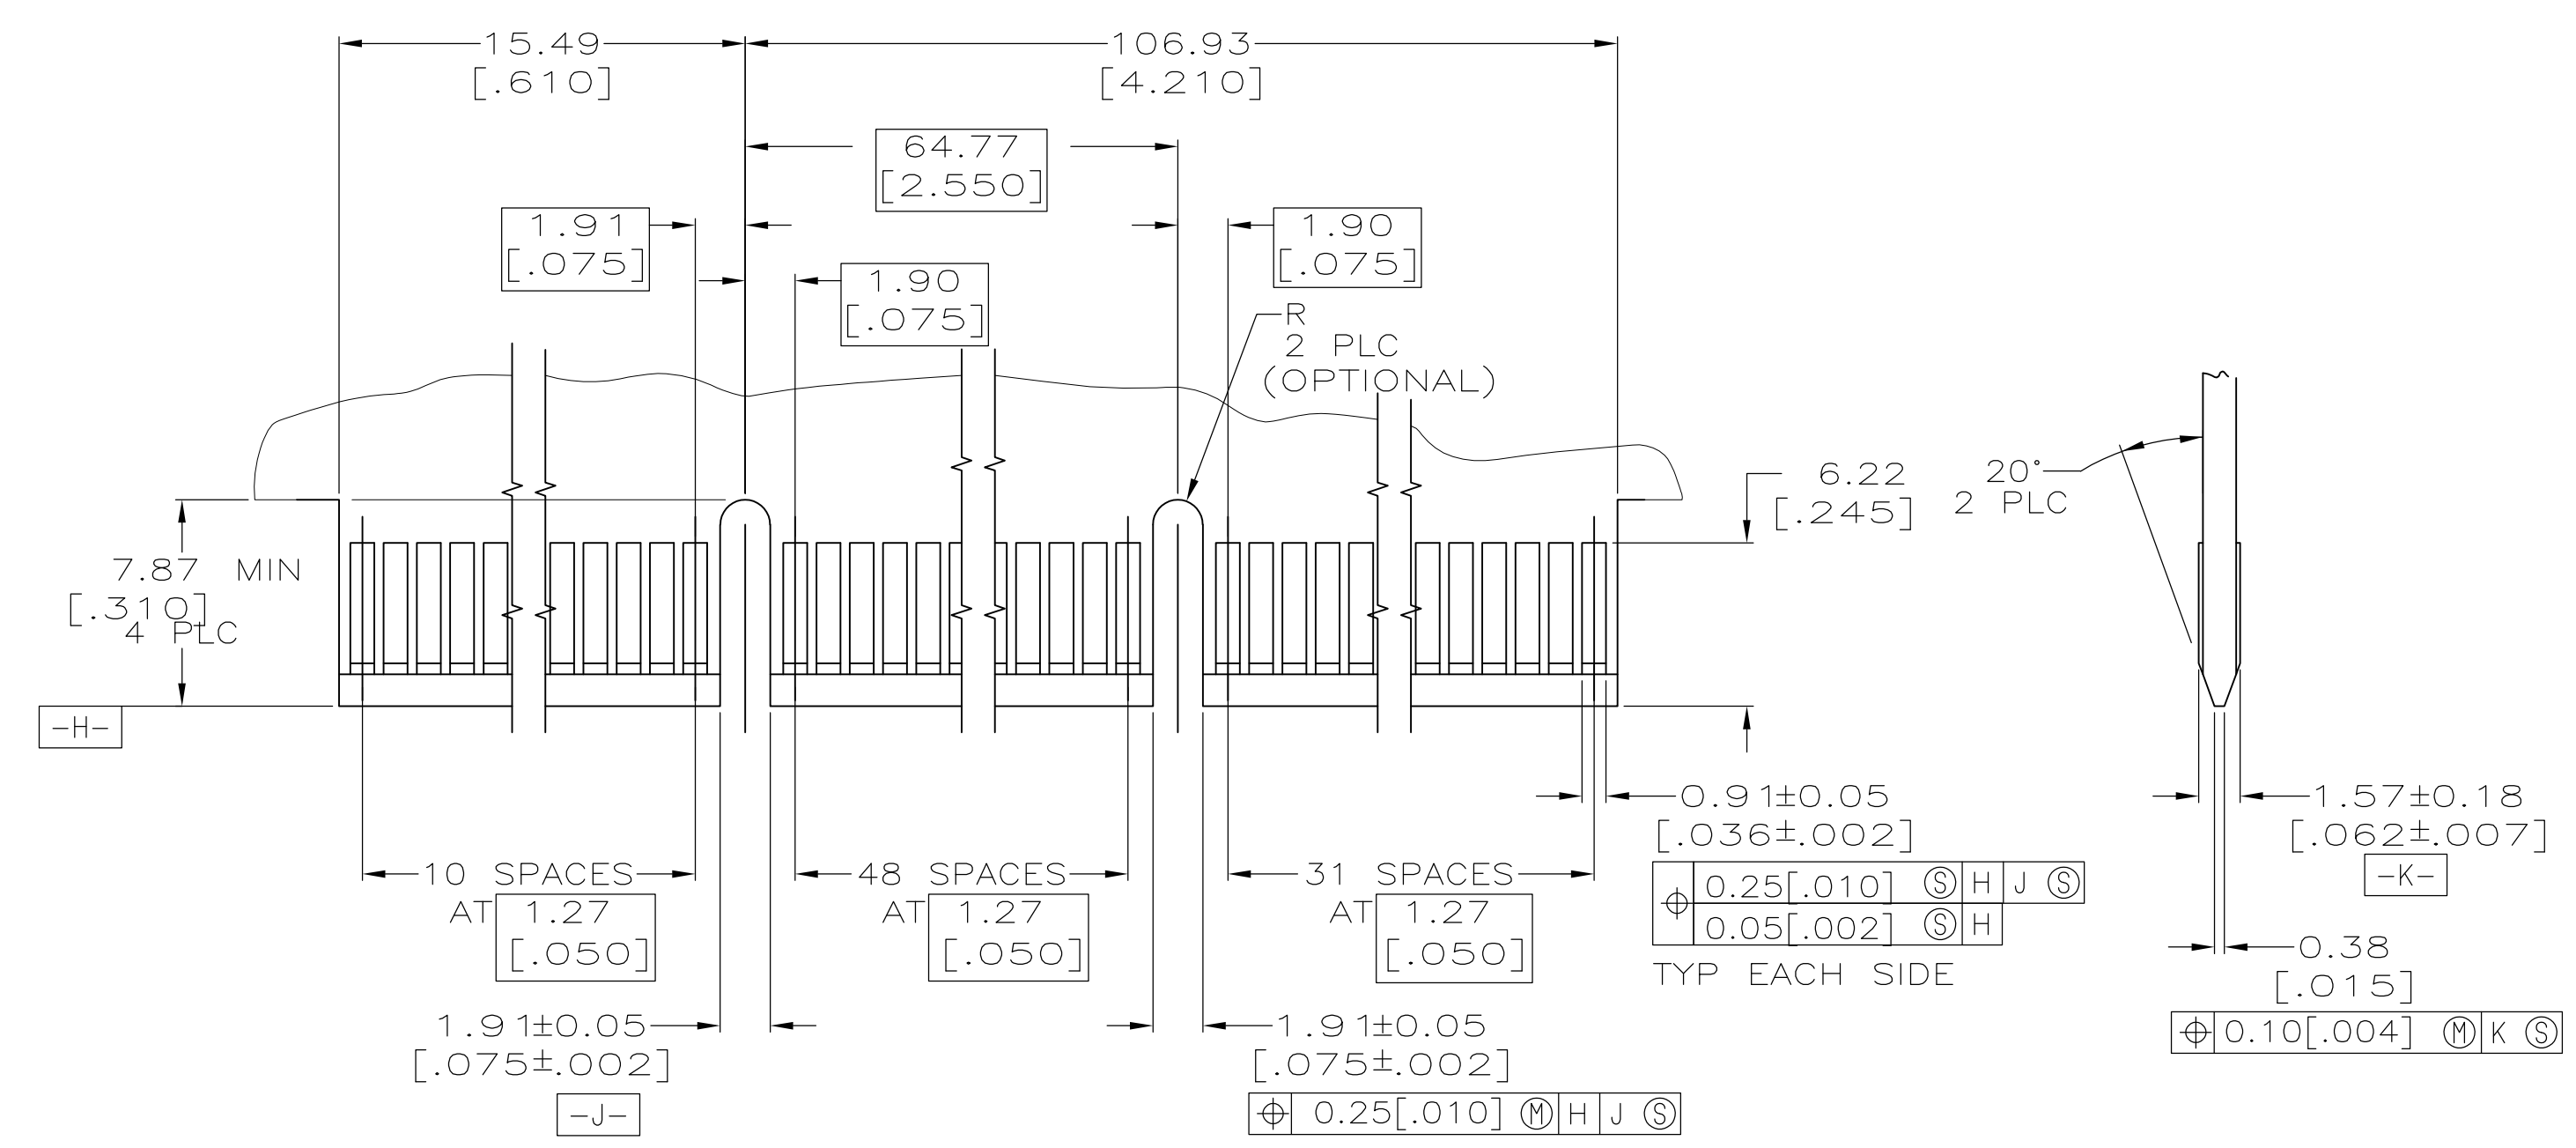

RECOMMENDED MATING BOARD EDGE CONFIGURATION

- 1 HOUSING: HIGH TEMPERATURE THERMOPLASTIC.
COLOR - NATURAL
- 2 CONTACT: PHOSPHOR BRONZE.
- 3 CONTACT FINISH: 0.00127[.000050] MIN NICKEL ALL OVER.
GOLD FLASH OVER NICKEL IN CONTACT AREA.
0.00254[.000100] MIN TIN-LEAD OVER NICKEL ON SOLDER TAILS.
- 4 CONTACT FINISH: 0.00127[.000050] MIN NICKEL ALL OVER.
0.00038[.000015] GOLD OVER NICKEL IN CONTACT AREA.
0.00254[.000100] MIN TIN-LEAD OVER NICKEL ON SOLDER TAILS.
- 5 CONTACT FINISH: 0.00127[.000050] MIN NICKEL ALL OVER.
0.00076[.000030] GOLD OVER NICKEL IN CONTACT AREA.
0.00254[.000100] MIN TIN-LEAD OVER NICKEL ON SOLDER TAILS.
- 6 DISTANCE FROM CONTACT POINT TO BOTTOM OF CARD SLOT.
- 7 AMP PART NUMBER, DATE CODE AND CSA LOGO MARKED IN APPROXIMATE LOCATION SHOWN.
- 8 CORED OR SOLID SIDE WALLS ARE AT DISCRETION OF AMP INCORPORATED.
- 9 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-145165-2](#)