
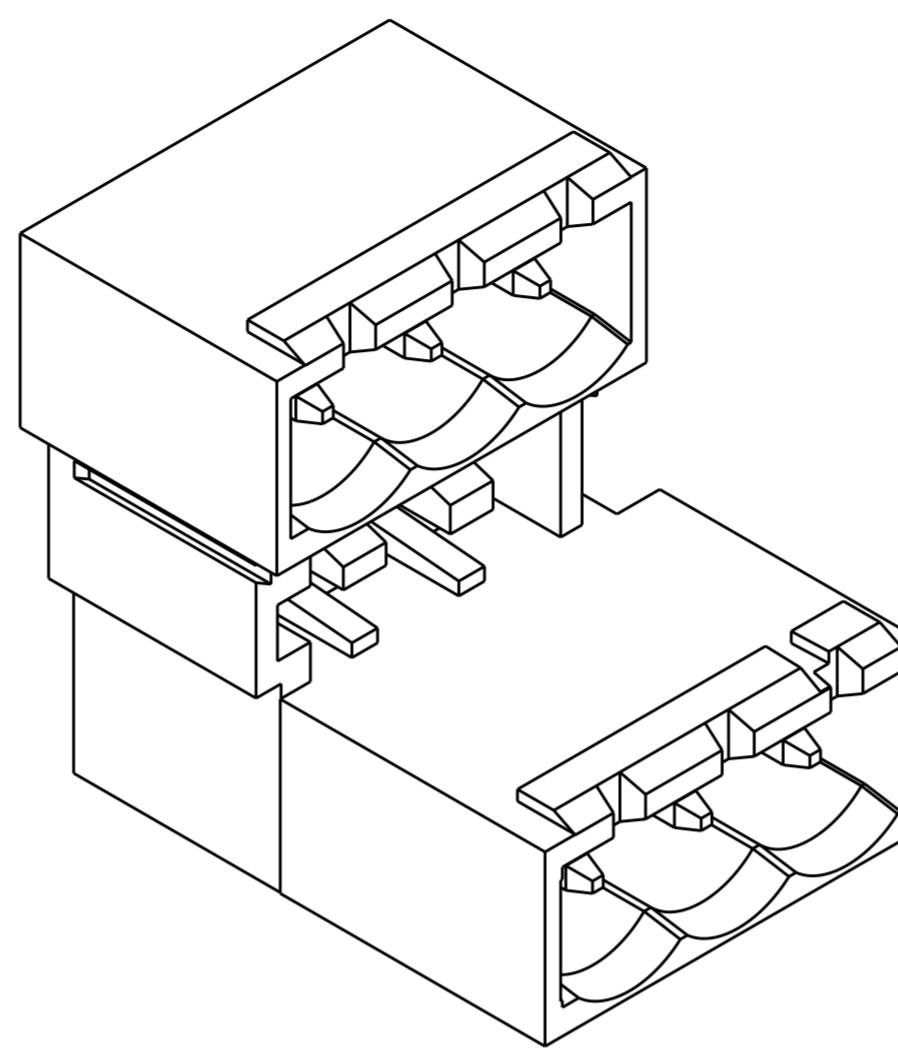



THIS DRAWING IS UNPUBLISHED.
RELEASED FOR PUBLICATION 20
ALL RIGHTS RESERVED.

© COPYRIGHT 20 BY -



20

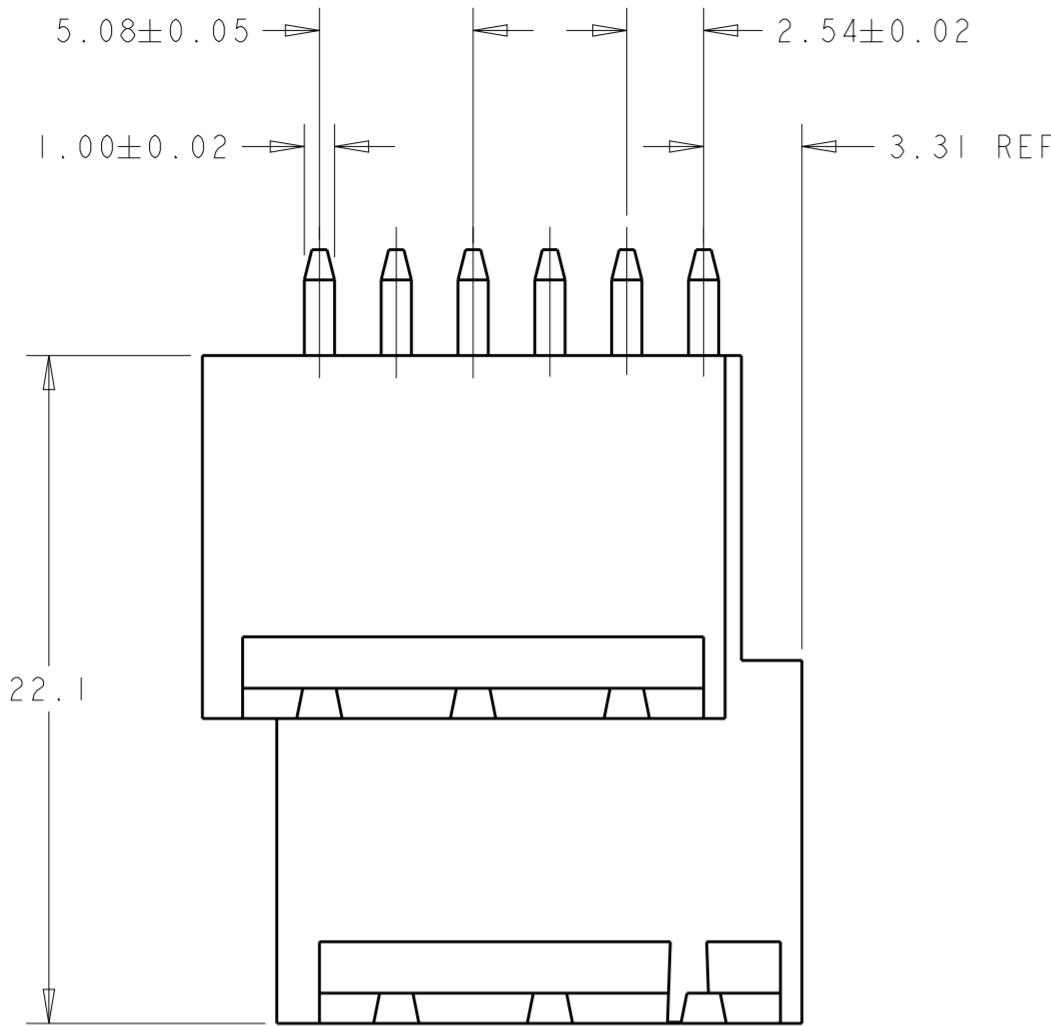

REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN APVD
	A	REVISED PER ECO-13-017516	08NOV2013	KH MB

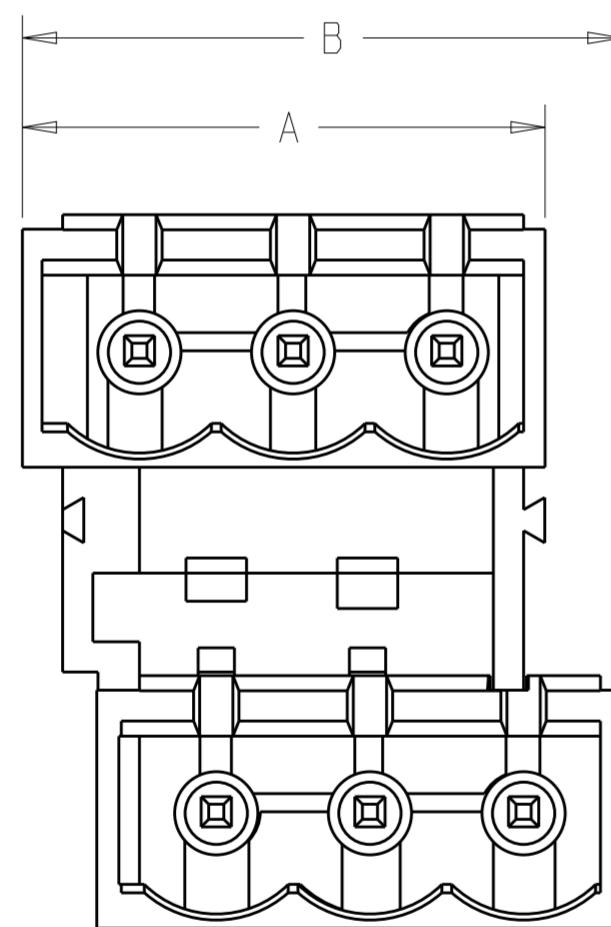

1776165-3 AS SHOWN

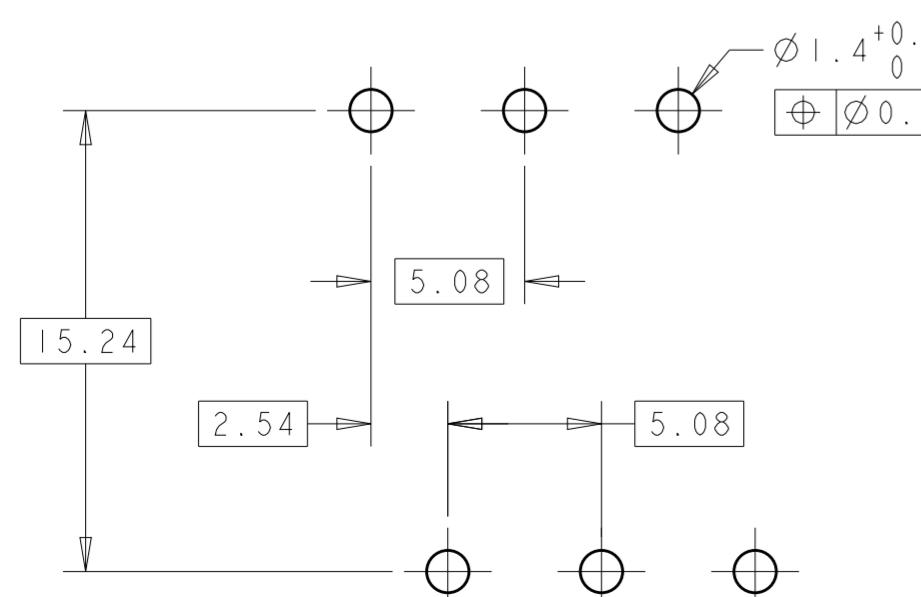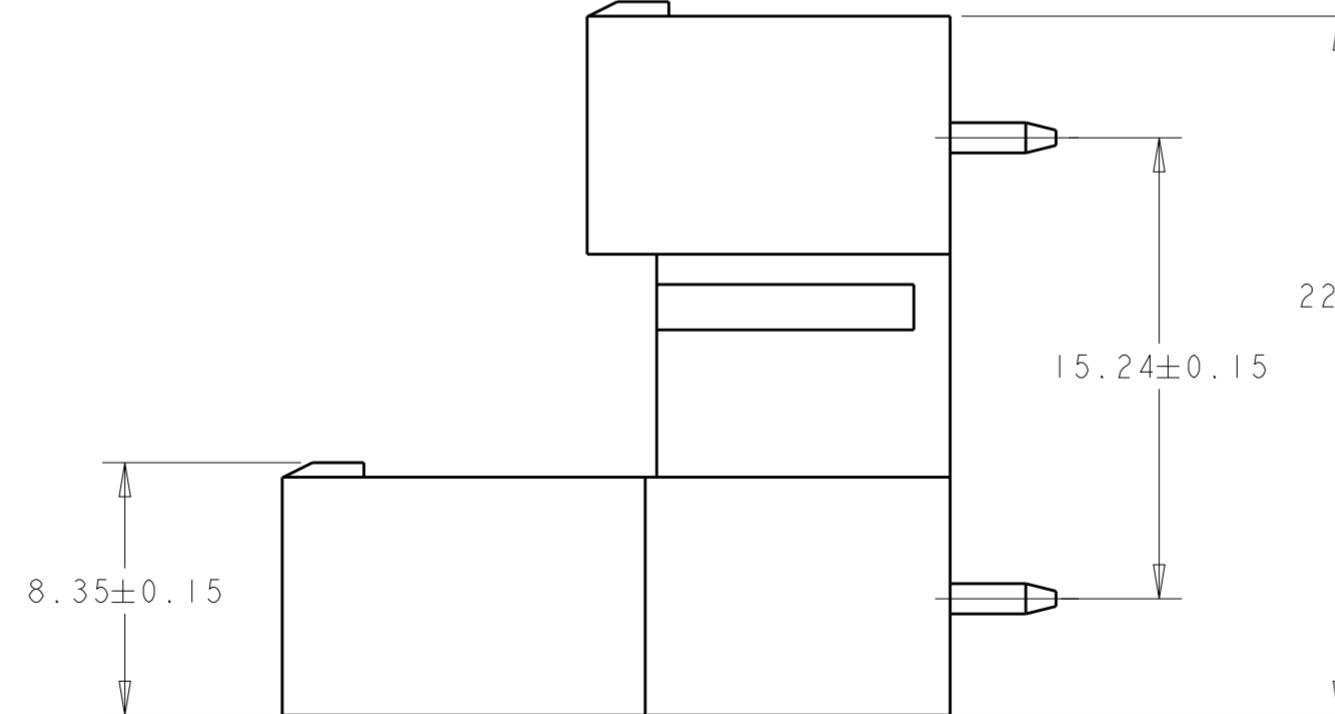

RECOMMENDED PC BOARD LAYOUT

▲ MATERIALS AND FINISH
HOUSING: HIGH TEMPERATURE POLYAMIDE, UL 94V-0 RATED, COLOR: BLACK.
TERMINAL: COPPER ALLOY, TIN PLATED.

2. SUITABLE FOR 1, 6-2, 4mm PC BOARD THICKNESS.
3. P/N FROM 1776165-4 TO 1776165-8 ARE OBTAINED BY ASSEMBLING 1776165-2 AND 1776165-3 TO ACHIEVE THE DESIRED NUMBER OF POSITIONS.

45.22	42.68	8	1776165-8
40.14	37.60	7	1776165-7
35.06	32.52	6	1776165-6
29.98	27.44	5	1776165-5
24.90	22.36	4	1776165-4
19.82	17.28	3	1776165-3
14.74	12.20	2	1776165-2
B	A	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. WELDON CHK C. RICHARD APVD C. RICHARD	01AUG2005 01AUG2005 01AUG2005	TE Connectivity
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:			
0 PLC	±.3			
1 PLC	±.25			
2 PLC	±.25			
3 PLC	±.25			
4 PLC	±.25			
ANGLES	±2			
PRODUCT SPEC				
APPLICATION SPEC				
MATERIAL	FINISH			
△	△			
CUSTOMER DRAWING				
A 200779	C=1776165			
SIZE	CAGE CODE	DRAWING NO		RESTRICTED TO
4:1				-
SCALE				
1 OF				
REV A				

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1776165-7](#)