
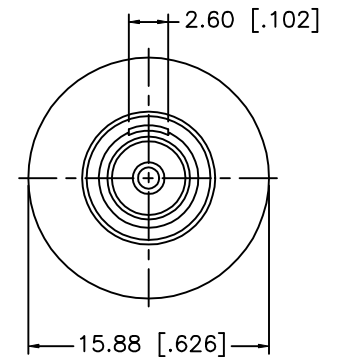
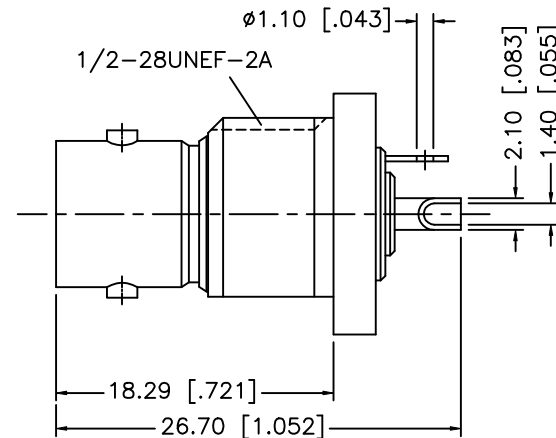

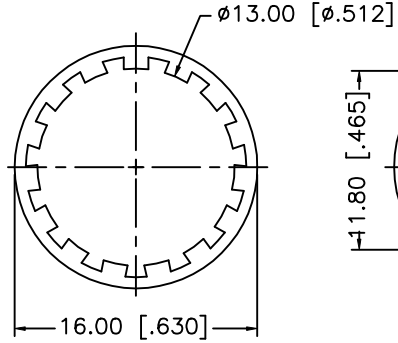



REV.	DATE	DESCRIPTION
NC	04/11/02	INITIAL RELEASE



NOTE:

1. MAX. PANEL THICKNESS = 2.5mm

8				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS	APPROVALS	DATE	Amphenol - Connex CONNECTOR CORPORATION			
7	HEX NUT	BRASS	NICKEL	DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY	DRAWN	G.R.S.				
6	LOCK WASHER	BRASS	NICKEL		CHECKED					
5	HOUSING	BRASS	NICKEL		ISSUED					
4	INSULATOR	DELTRIN	NATURAL	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .XXX = ± 0.005" .XX = ± 0.010" .X = ± 0.020"			TITLE BNC BULKHEAD ISOLATED RECEPTACLE (75ohm)			
3	CONTACT PIN	PHOS. BRONZE	GOLD				SIZE	FSCM NO.	DWG. NO.	REV.
2	INSULATOR	TEFLON	NATURAL				A	99001	112670.DWG	NC
1	BODY	BRASS	NICKEL				SCALE	PART NO.		
	DESCRIPTION	MATERIAL	FINISH	DO NOT SCALE DRAWING			NA	112670	SHEET	1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[112670](#)