


S

WAS P-73-6103

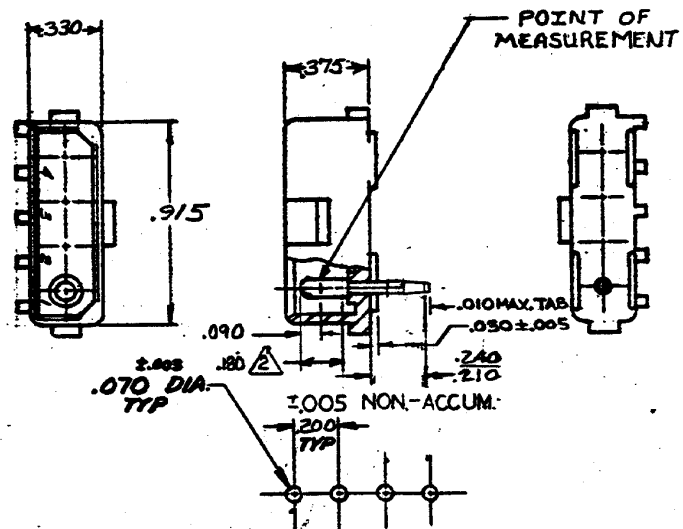

RECOMMENDED LAYOUT FOR
.125 THICK P.C. BOARD

1. PARTS COMPLY WITH TE SOLDERABILITY

SPEC. NO. 109-11-3

CONTACT IS PLATED OVERALL WITH .000050 NICKEL, THEN
.000030 GOLD OVER CONTACT LENGTH INDICATED AND TIN
PLATED ON SOLDER TAIL END.

OBSOLETE

350544-2 NYLON - NATURAL COPPER ALLOY - GOLD

350544-1 NYLON - NATURAL COPPER ALLOY PRE-TIN
ASSEMBLY NO. HSG. MATL & COLOR PIN MATL & FINISH

OR 9. Eshman	MATERIAL AND FINISH SEE TABLE		TE Connectivity	
DATE 4/14/73	WIRE - RANGE - INSULATION H		CLASS	
DE J. Humble 9/14/73	TOLERANCE EXCEPT AS NOTED ±.015 ±.10 ±.		TYPE	
APP J. Humble 9/14/73	SCALE 1:1		LOC CM B	
REVISED PER ECR-15-006702		REV 350544		
REVISION RECORD		4 CIRCUIT MATE-N-LOK P.C. BOARD HEADER		

12 REVISED PER ECR-15-006702 NK PQ 00012015
2.75 REVISION RECORD 2.25 CM DATE

ALL DIMENSIONS IN INCHES. DO NOT SCALE PRINT.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[350544-2](#)