
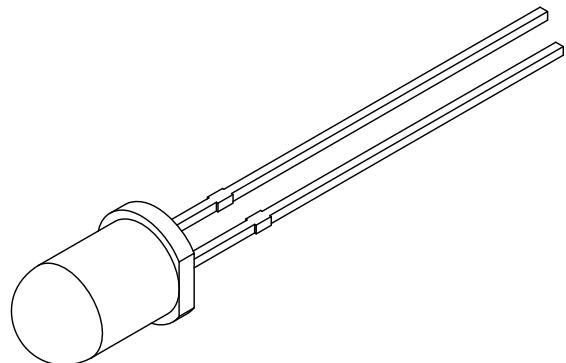
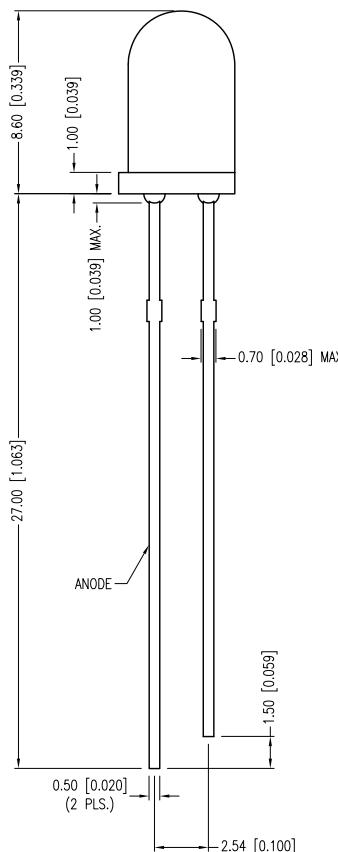


PART NUMBER	SSL-LX5093LID			REV.
DATE	E.C.N. NUMBER AND REVISION COMMENTS			REV.
05.15.90	CHG'D AXIAL INTENSITY			A
01.06.95	REDRAWN, UPDATED SPECS.			B
05.25.01	E.C.N. #10BRDR. & REDRAWN IN 3D.			C
10.23.06	E.C.N. #11148.			D
02.16.12	E.C.N. #10BRDR. & REDRAWN.			E

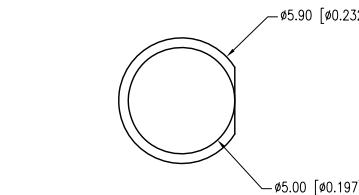

\*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION MAX.= +0.00  
-0.00

DATE:	02.16.12	DRAWN BY:	AB
PAGE:	1 OF 1	CHKD BY:	DT
SCALE:	NTS	APRVD BY:	KF
UNIT:	mm [INCH]		NO

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Lumex](#):

[SSL-LX5093LID](#)