


Applications

- For Band 40 TD-LTE applications

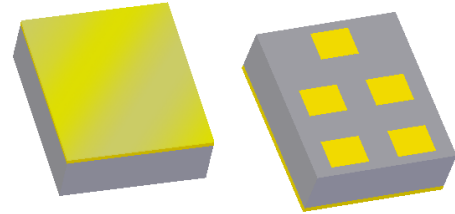

1.4 x 1.2 x 0.46 mm

Product Features

- Highly selective BAW filter achieving low insertion loss over full bandwidth and operating conditions
- Performance -20 to +90 °C
- Excellent Wi-Fi rejection
- Single-ended operation
- Ceramic chip-scale Package (CSP)
- Small Size
- Hermetic RoHS compliant, Pb-free


General Description

885069 is a Band 1 Uplink filter for general purpose wireless applications. This filter was specifically designed in a 3x3 mm hermetic package for base station applications and is part of our wide portfolio of RF filters in the same package.

885069 has low insertion loss, coupled with high attenuation and good power handling, making this filter a natural choice for our customers uplink RF filtering needs and other general purpose applications.

885069 require no matching components, making filter implementation easy.

Functional Block Diagram

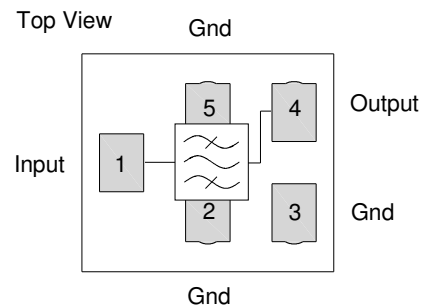

Pin Configuration

Pin No.	Label
1	Input
4	Output
2,3,5	Ground

Ordering Information

Part No.	Description
885069	Packaged Part
885069-EVB	Evaluation board

Standard T/R size = 10,000 units/reel

Absolute Maximum Ratings

Parameter	Rating
Storage Temperature ⁽¹⁾	-40 to +90 °C
Operable Temperature ⁽²⁾	-20 to +90 °C
RF Input Power ⁽³⁾	+27 dBm



1. Operation of this device outside the parameter ranges given may cause permanent damage.
2. Specifications are not guaranteed over all operable conditions.
3. Input Power with applied CW signal in passband

Electrical Specifications ⁽¹⁾

Parameter	Conditions	-20 °C		+25 °C			+90 °C		Unit
		Min	Max	Min	Typ ⁽²⁾	Max	Min	Max	
Insertion Loss	2300 – 2395 MHz	-	3.0	-	1.3	2.7	-	2.7	dB
	2395 – 2400 MHz	-	2.2	-	1.8	3.0	-	3.2	dB
Input/output VSWR	2300 – 2400 MHz	-	2.0:1	-	1.4:1	2.0:1	-	2.0:1	-
Passband Ripple	2300 – 2400 MHz	-	1.7	-	1.1	1.7	-	1.7	dB
Attenuation	10 – 1574 MHz	30	-	30	47	-	30	-	dB
	1574 – 1577 MHz	30	-	30	33	-	30	-	dB
	1577 – 1680 MHz	30	-	30	33	-	30	-	dB
	1845 – 1880 MHz	28	-	28	31	-	28	-	dB
	2110 – 2170 MHz	28	-	28	32	-	28	-	dB
	2420 – 2427 MHz	8	-	15	49	-	45	-	dB
	2427 – 2460 MHz	45	-	45	57	-	45	-	dB
	2460 – 2500 MHz	38	-	38	50	-	38	-	dB
	4600 – 4800 MHz	28	-	28	32	-	28	-	dB
	6900 – 7200 MHz	20	-	20	23	-	20	-	dB
	2422 – 7200 MHz ⁽³⁾	20	-	20	23	-	20	-	dB
Source/Load Impedance ⁽⁴⁾	Single-ended	-	-	-	50	-	-	-	Ω

1. All specifications are based on the TriQuint schematic for the main reference design shown on page 3.
2. Typical values are derived through integration of the linear s-parameter over the indicated band at the specified temperature.
3. Integration of the linear s-parameter over an 18 MHz sliding frequency span.
4. This is the optimum impedance in order to achieve the performance shown

885069 Evaluation Board

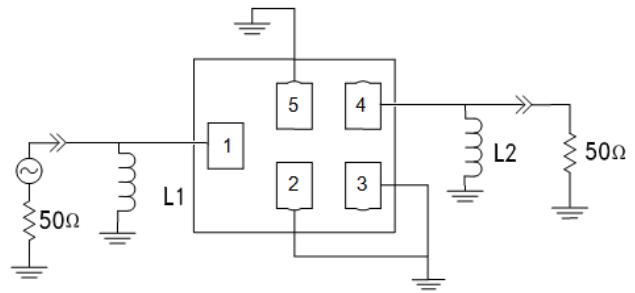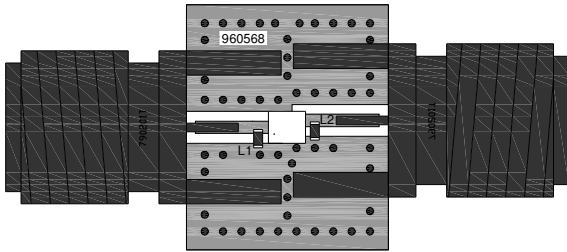

Top View


Notes:

1. Impedance matching required.
2. Top, middle & bottom layers: 1/2 oz copper, Substrates: FR4 dielectric, .062" thick, Finish plating: Nickel: 3-8 μm thick, Gold: .03-.2 μm thick, Hole plating: Copper min .0008 μm thick

Bill of Material – 885069-EVB

Reference Des.	Value	Description	Manuf.	Part Number
L1	3.9 nH	Chip Inductor, 0201, +/- 0.1nH	Murata	LQP03TN3N9H00
L2	4.3 nH	Chip Inductor, 0201, +/- 0.1nH	Murata	LQP03TN4N3H00
PCB	N/A	3-layer	Multiple	960568

PCB Mounting Pattern




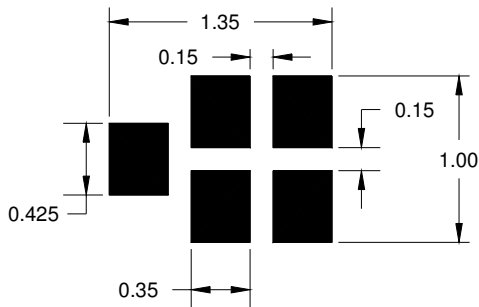


Notes:


1. Black indicates metalized area
2. This footprint represents a recommendation only
3. For solder pad recommendation see mechanical information
4. Dimensions shown are nominal in millimeters

Measured Performance Plots


Test conditions unless otherwise noted: Temp= +25 °C

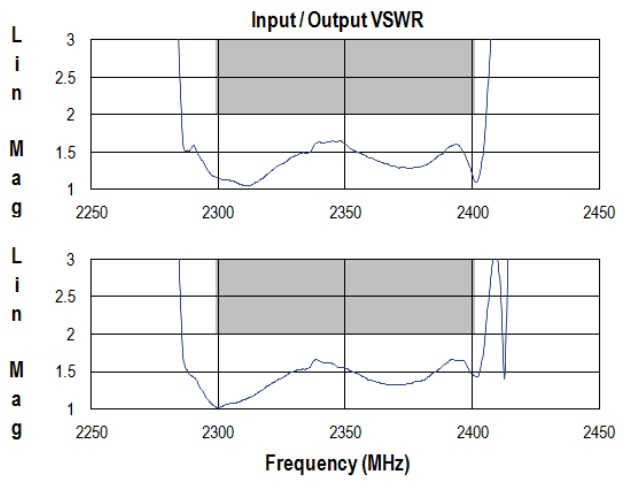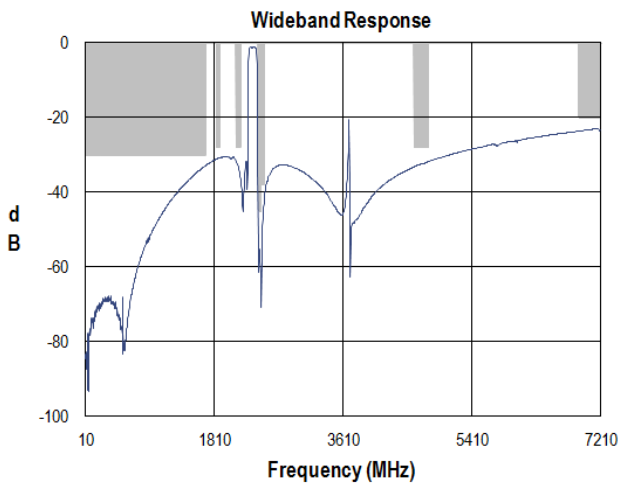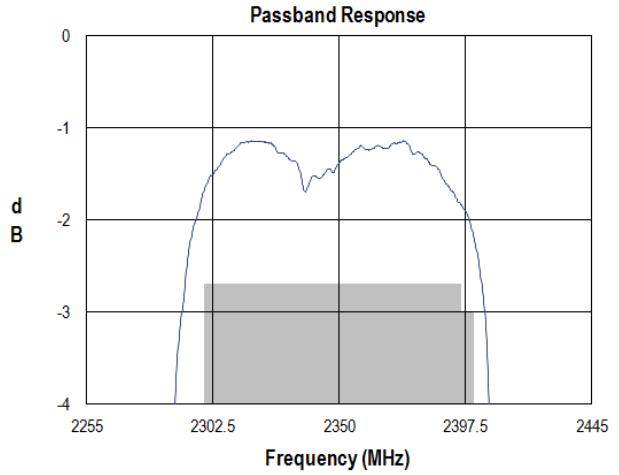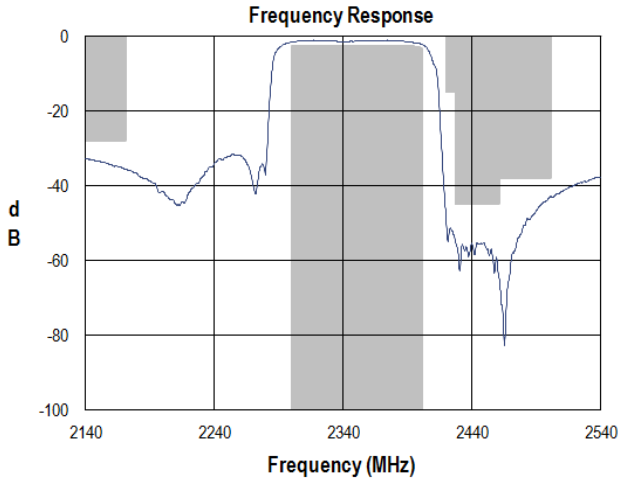


Input Smith Chart

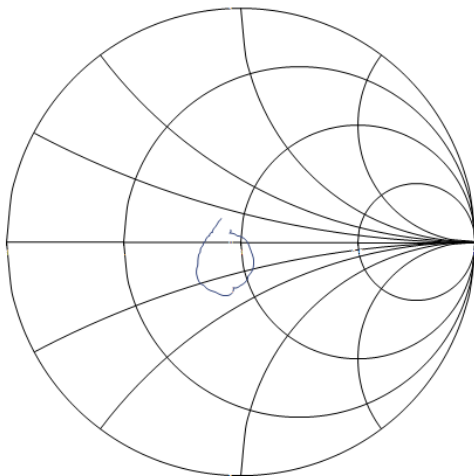

Output Smith Chart

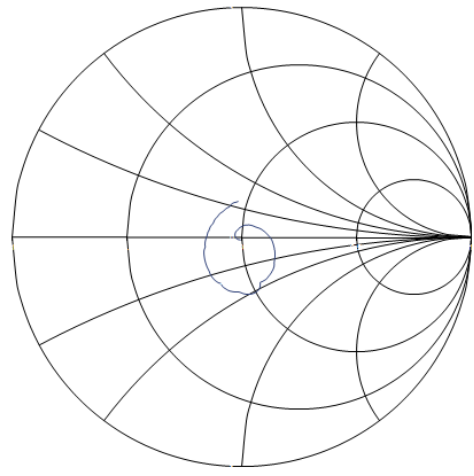

Package Information, Marking and Dimensions

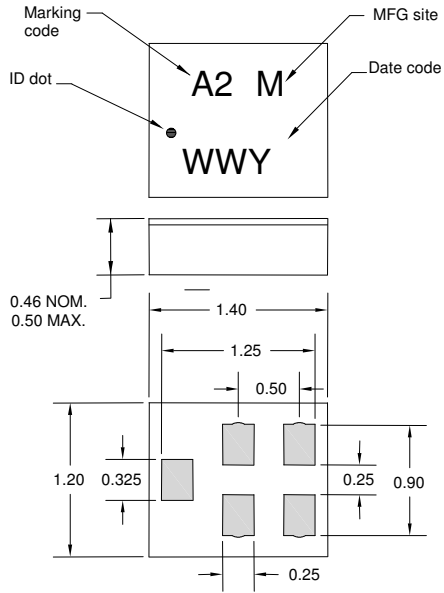

Package Style: CSP-5CT
 Dimensions: 1.4 x 1.2 x 0.46 mm



Body: Al_2O_3 ceramic
 Lid: Kovar, Au over Ni plating
 Terminations: Au plating 0.5 - 1.0 μ m, over a 2-6 μ m Ni plating

The date code consists of:
 WW = 2 digit week,
 Y = last digit of year
 M = manufacturing site code

- Notes:
1. All dimensions shown are typical in millimeters
 2. All tolerances are ± 0.05 mm except overall length and width ± 0.10 mm.
 3. An asterisk (*) in front of the marking code indicates prototype.

Tape and Reel information

Standard T/R size = 10,000 units/reel. All dimensions are in millimeters

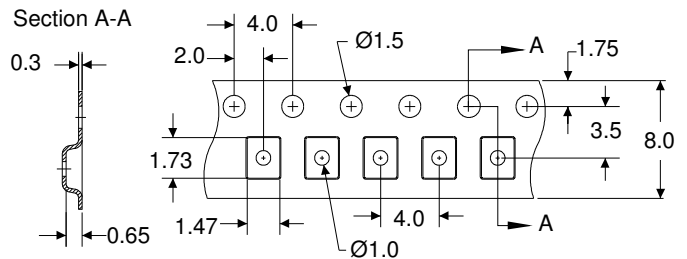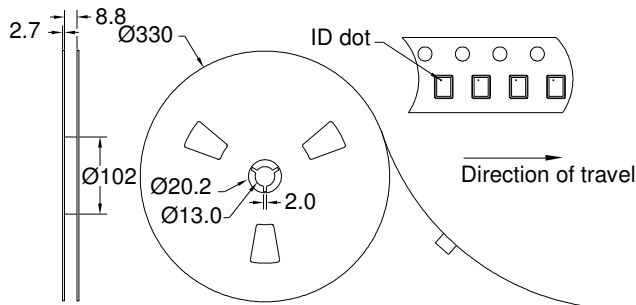

Product Compliance Information

ESD Sensitivity Ratings



Caution! ESD-Sensitive Device

ESD Rating: Class 1C
Value: 1800 V
Test: Electrostatic Discharge Sensitivity Testing,
Human Body Model (HBM) - component level
Standard: ESDA/JEDEC JS-001-2012

ESD Rating: Class C
Value: 400 V
Test: Machine Model (MM)
Standard: JEDEC Standard JESD22-A115

MSL Rating

Not applicable. Hermetic package.

Solderability

Compatible with both lead-free (260 °C maximum reflow temperature) and tin/lead (245 °C maximum reflow temperature) soldering processes.

Refer to [Soldering Profile](#) for recommended guidelines.

RoHS Compliance

This part is compliant with EU 2002/95/EC RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment).

This product also has the following attributes:

- Lead Free
- Halogen Free (Chlorine, Bromine)
- Antimony Free
- TBBP-A (C₁₅H₁₂Br₄O₂) Free
- PFOS Free
- SVHC Free

Contact Information

For the latest specifications, additional product information, worldwide sales and distribution locations, and information about TriQuint:

Web: www.triquint.com
Email: info-sales@tqs.com

Tel: +1.407.886.8860
Fax: +1.407.886.7061

For technical questions and application information: Email: flapplication.engineering@tqs.com

Important Notice

The information contained herein is believed to be reliable. TriQuint makes no warranties regarding the information contained herein. TriQuint assumes no responsibility or liability whatsoever for any of the information contained herein. TriQuint assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for TriQuint products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

TriQuint products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Qorvo:](#)

[885069](#)