


PC board drilling dimensions(after plating)

(thickness ≤ 3.20±0.30mm)

Pitch 2.76(shell 25-37)


Pitch 2.74(shell 09-15)

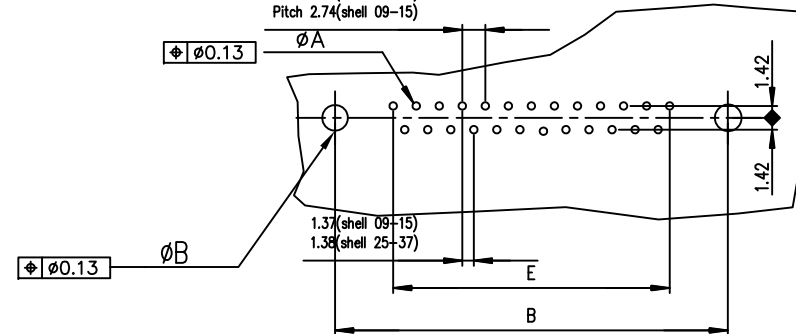

ROHS PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	200 Mating	500 Mating
09	30.81	24.99	16.96	16.79	10.96	D09P91C4GX00LF	D09P91C6GX00LF
15	39.14	33.32	25.18	25.12	19.18	D15P91C4GX00LF	D15P91C6GX00LF
25	53.03	47.04	39.12	38.84	33.12	D25P91C4GX00LF	D25P91C6GX00LF
37	69.32	63.50	55.68	55.30	49.68	D37P91C4GX00LF	D37P91C6GX00LF

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C01-8646-0001

mat'l. code				surface ISO 1302		tolerance ISO 406 ISO 1101		projection 		product family D-SUB			
ltr		ecn no		dr		date		tolerances unless otherwise specified				title	
H		ELX-I-21654		AB		2015-10-26		angles		linear		.0±0.1	
J		ELX-I-24020		AAB		2016-06-06		0°±2°		linear		.00±0.1	
												mm	
												scale 2:1	
								dr		PESSON		1994-10-20	
								engr		MITHUN PAUL		2016-06-06	
								chr		ATHUL A.B		2016-06-06	
								appd		BIJU K PAUL		2016-06-06	
sheet index		revision sheet		J		1							

Amphenol
FCI

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[D09P91C6GX00LF](#) [D25P91C6GX00LF](#)