
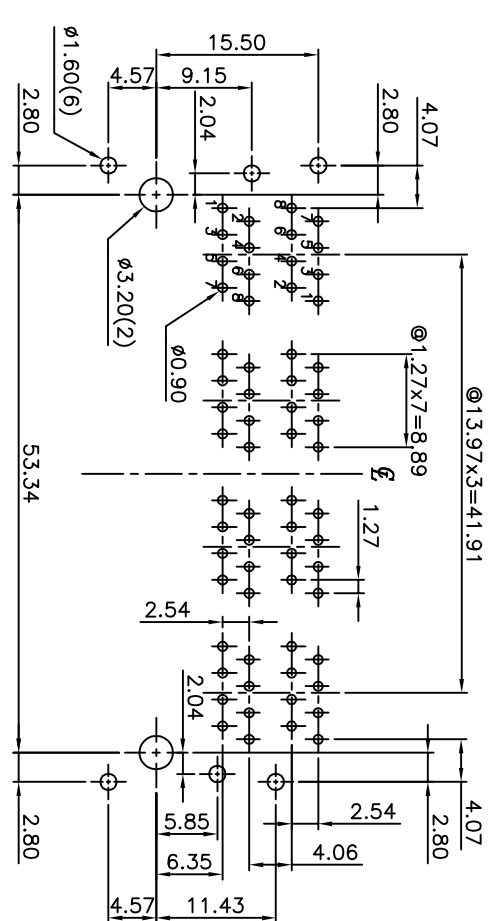
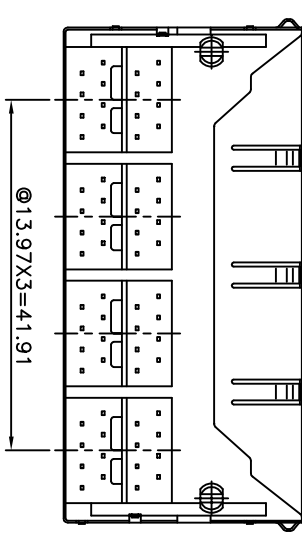
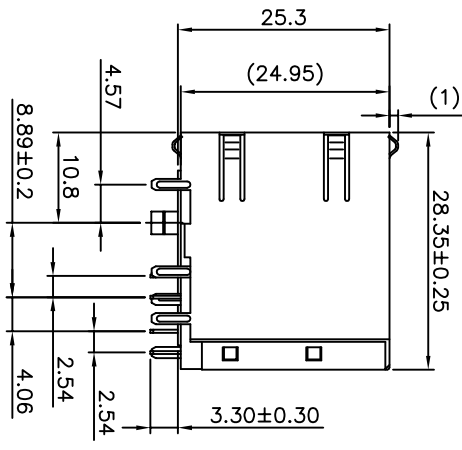


REVISION RECORD	
REV	DESCRIPTION
	DFT

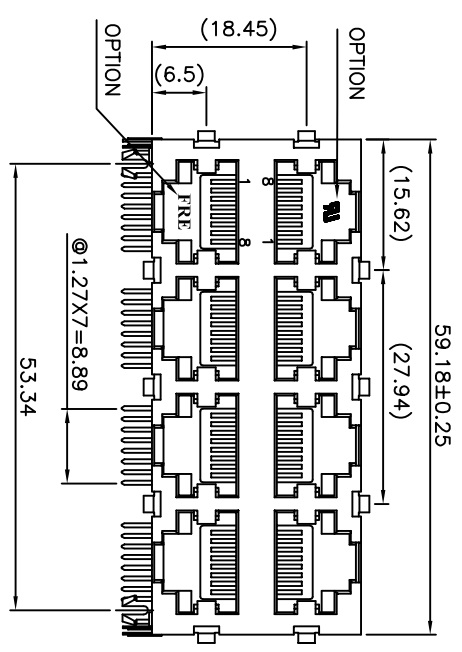

PC BOARD LAYOUT T=1.60mm
COMPONENT SIDE SHOWN
TOLERANCES±0.05mm

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 60 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VDC RMS 60HZ, 1MIN.

MECHANICAL:

1. HOUSING & IN'S MATERIAL : PBT FIBER GLASS FILLED . UL94V-0
2. CONTACT MATERIAL : PHOSPHOR BRONZE, T=0.35mm.
3. SHIELD MATERIAL : COPPER ALLOY, T=0.25mm.
4. PLATING : GOLD PLATING OVER NICKEL.
5. OPERATING LIFE : 750 CYCLES MIN.
6. PCB RETENTION PRE-SOLDER : 1 LB MIN.
7. PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

1. STORAGE TEMPERATURE : -40°C TO +85°C.
 2. OPERATION TEMPERATURE: -40°C TO +85°C.
 3. WAVE SOLDERING TEMPERATURE: 235°C TO 245°C (3~5 SECONDS).
 4. RoHS COMPLIANT.
- MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.
CUL FILE NO. E163191

DETACHED LISTS	
MM	INCH
TOLERANCES EXCEPT AS NOTED	
0 ± 0.25	±
.00 ± 0.20	±
.000 ± 0.10	±
ANGLES ± 1°	
THIRD ANGLE PROJECTION	
RoHS Compliant	
Pulse Electronics	
STAMPED PIN III	
TITLE	STACKED GANGED JACK, 2X4
DFTO :	KURT
DATE :	05/07/2012
SCALE :	3:2
DRAWING NO.	CE5908-SVC14X-L
/PART NO.	E5908-SVC145-L
DO NOT SCALE DRAWING	
SHEET	1 OF 1
SIZE	A3
REV	0

ES908-SVC145-L	NICKEL	BLACK	500*	W/
PART NO.	SHIELD PLATING	COLOR	AU PLATING	FRE & UL LOGO

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pulse:

[E5908-5VC145-L](#)