


3 Watt Light Bar on OptoTherm® Heat Spreader

OPA739 Series



OPA739_ (120° Beam Angle)



OPA739_D (40° Beam Angle)



Features:

- 3-1 watt LED on square substrate
- Mono-color per strip (Blue, Green, Red, Yellow, White)
- Two component beam angle options (120° or 40°)
- Universal connector (Tyco 2-292173-2 mates with 173977-2)
- RoHS Compliant

Description:

The **OPA739** Series are designed for areas where lighting intensity and reliability are essential. The light beam angles of 40° and 120° are ideal for illuminating small and medium size areas while requiring minimal space. A High Performance Heat Spreader (HPHS) is used to ensure the best heat dissipation of any light assembly in the industry.

OptoTherm® is designed to be the optimum material for distribution of heat for high power devices.

For custom colors and design contact your OPTEK representative.

Electrical / Optical Characteristics: $T_A=25^{\circ}\text{C}$, $I_F=350\text{mA}$

Part Number	Typical Forward Voltage (V)	Luminous Flux (lm)	Beam Angle	Color	Dominant Wavelength
OPA739Y	7.5	105	120°	Yellow	587 nm
OPA739B	10.8	27		Blue	470 nm
OPA739G	10.8	144		Green	530 nm
OPA739R	7.5	78		Red	625 nm
OPA739W	10.8	144		White	6,500°K
OPA739YD	7.5	105	40°	Yellow	587 nm
OPA739BD	10.8	27		Blue	470 nm
OPA739GD	10.8	144		Green	530 nm
OPA739RD	7.5	78		Red	625 nm
OPA739WD	10.8	144		White	6,500°K




DO NOT LOOK DIRECTLY AT LED WITH UNSHIELDED EYES OR DAMAGE TO RETINA MAY OCCUR.

General Note
TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

OPTEK Technology, Inc.
1645 Wallace Drive, Carrollton, TX 75006 | Ph: +1 972 323 2200
www.optekinc.com | www.ttelectronics.com


3 Watt Light Bar on OptoTherm® Heat Spreader

OPA739 Series

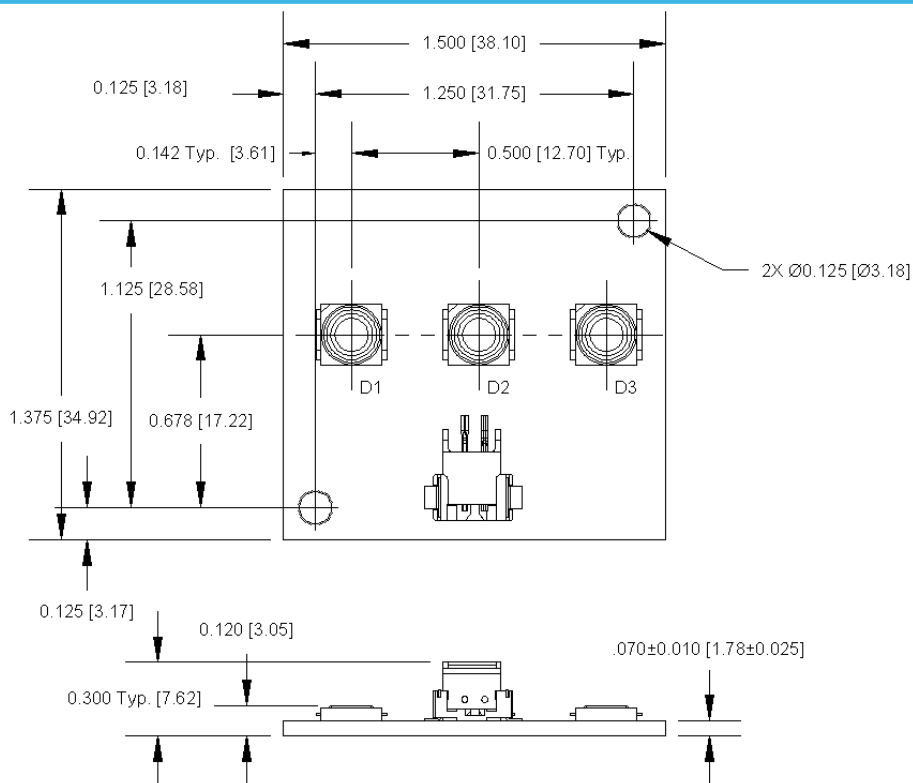



OPA739_

See OVSP_BCR4 for component specifications



OPA739_D

See OVSP_4CR44 for component specifications

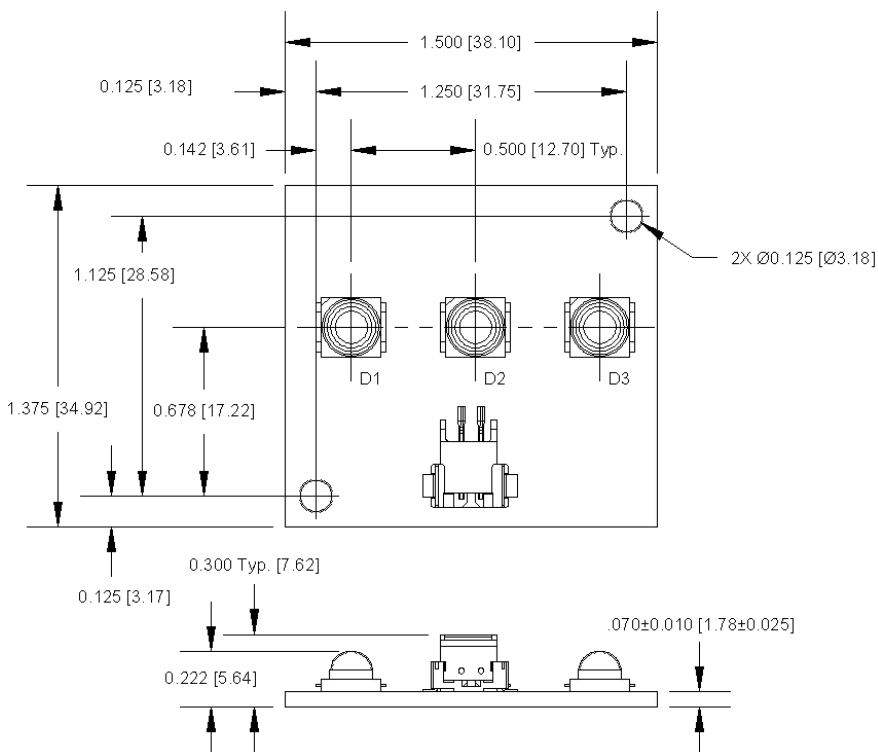

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

OPTEK Technology, Inc.
1645 Wallace Drive, Carrollton, TX 75006 | Ph: +1 972 323 2200
www.optekinc.com | www.ttelectronics.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TT Electronics:](#)

[OPA739B](#) [OPA739G](#) [OPA739R](#) [OPA739W](#) [OPA739Y](#)