


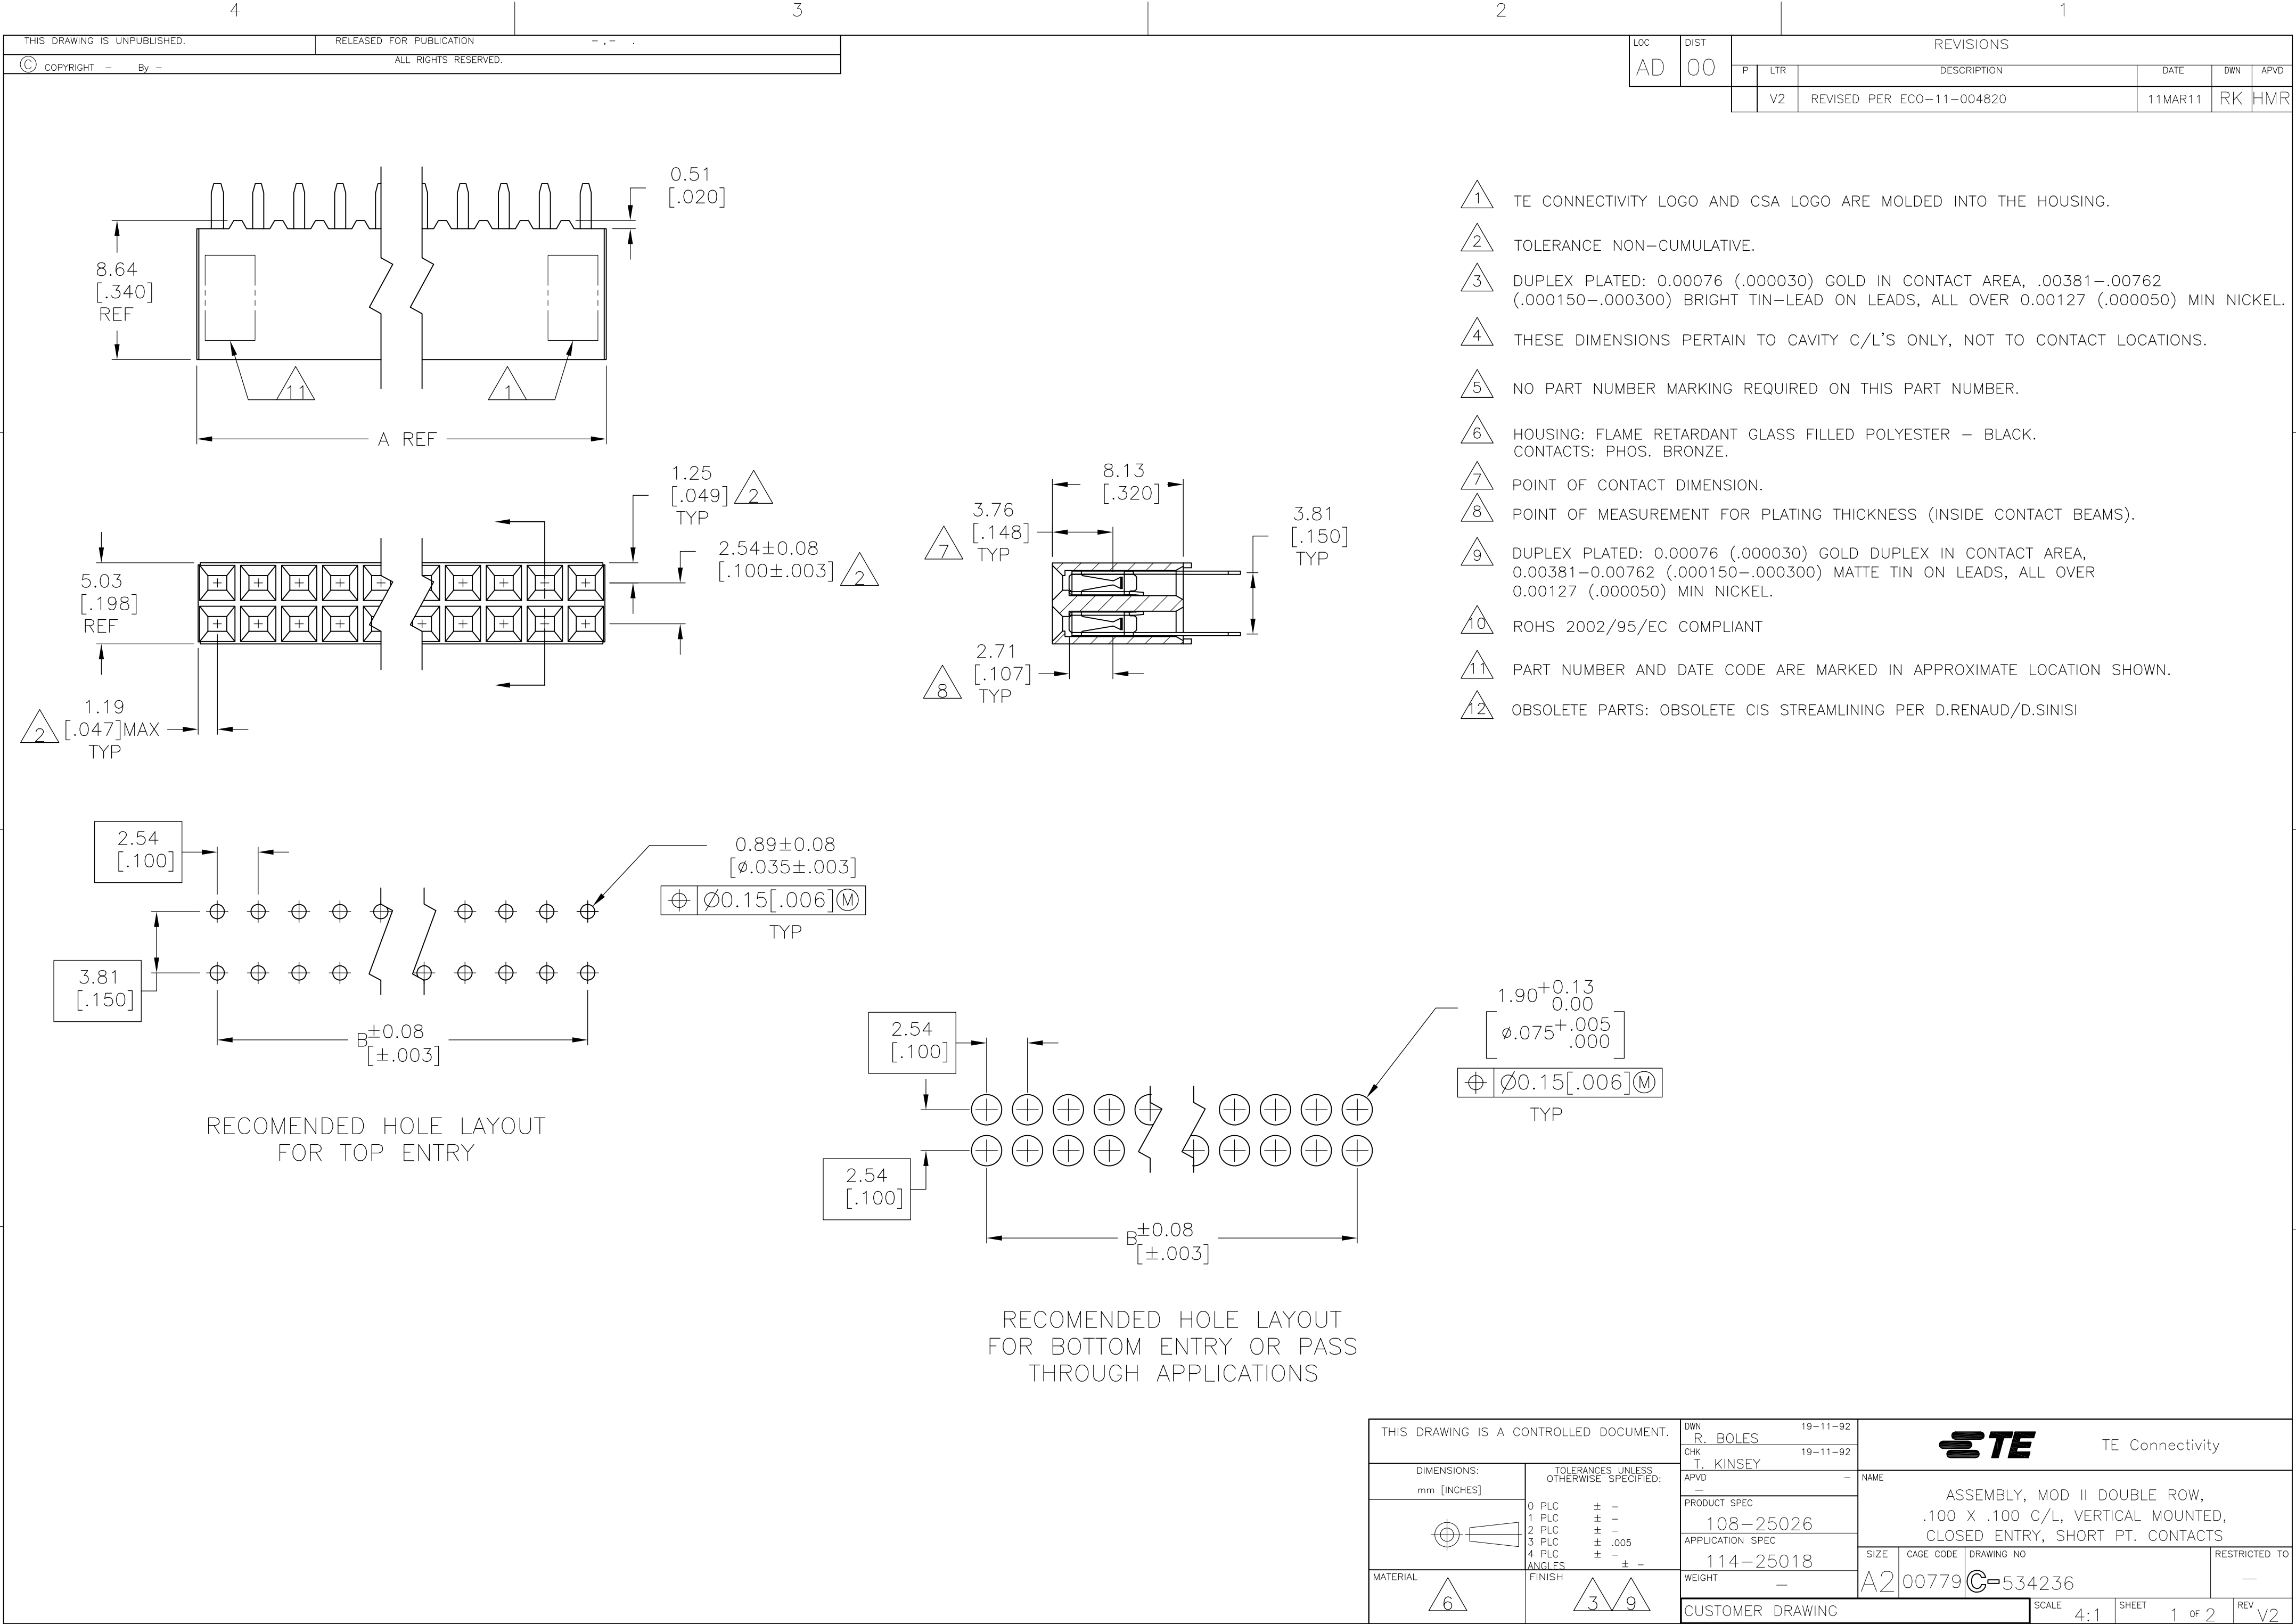

- 1 TE CONNECTIVITY LOGO AND CSA LOGO ARE MOLDED INTO THE HOUSING.
- 2 TOLERANCE NON-CUMULATIVE.
- 3 DUPLEX PLATED: 0.00076 (.000030) GOLD IN CONTACT AREA, .00381-.00762 (.000150-.000300) BRIGHT TIN-LEAD ON LEADS, ALL OVER 0.00127 (.000050) MIN NICKEL.
- 4 THESE DIMENSIONS PERTAIN TO CAVITY C/L'S ONLY, NOT TO CONTACT LOCATIONS.
- 5 NO PART NUMBER MARKING REQUIRED ON THIS PART NUMBER.
- 6 HOUSING: FLAME RETARDANT GLASS FILLED POLYESTER - BLACK. CONTACTS: PHOS. BRONZE.
- 7 POINT OF CONTACT DIMENSION.
- 8 POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE CONTACT BEAMS).
- 9 DUPLEX PLATED: 0.00076 (.000030) GOLD DUPLEX IN CONTACT AREA, 0.00381-0.00762 (.000150-.000300) MATTE TIN ON LEADS, ALL OVER 0.00127 (.000050) MIN NICKEL.
- 10 ROHS 2002/95/EC COMPLIANT
- 11 PART NUMBER AND DATE CODE ARE MARKED IN APPROXIMATE LOCATION SHOWN.
- 12 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT - By -

ALL RIGHTS RESERVED.

LOCAD

DIST00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-

FINISH	A	B	NO OF POSN	PART NO.
5	9	1.300	1.200	26
9	4.000	3.900	80	9-534236-0
9	3.900	3.800	78	8-534236-9
9	3.800	3.700	76	8-534236-8
9	3.700	3.600	74	8-534236-7
9	3.600	3.500	72	8-534236-6
9	3.500	3.400	70	8-534236-5
9	3.400	3.300	68	8-534236-4
9	3.300	3.200	66	8-534236-3
9	3.200	3.100	64	8-534236-2
9	3.100	3.000	62	8-534236-1
9	3.000	2.900	60	8-534236-0
9	2.900	2.800	58	7-534236-9
9	2.800	2.700	56	7-534236-8
9	2.700	2.600	54	7-534236-7
9	2.600	2.500	52	7-534236-6
9	2.500	2.400	50	7-534236-5
9	2.400	2.300	48	7-534236-4
9	2.300	2.200	46	7-534236-3
9	2.200	2.100	44	7-534236-2
9	2.100	2.000	42	7-534236-1
9	2.000	1.900	40	7-534236-0
9	1.900	1.800	38	6-534236-9
9	1.800	1.700	36	6-534236-8
9	1.700	1.600	34	6-534236-7
9	1.600	1.500	32	6-534236-6
9	1.500	1.400	30	6-534236-5
9	1.400	1.300	28	6-534236-4
9	1.300	1.200	26	6-534236-3
9	1.200	1.100	24	6-534236-2
9	1.100	1.000	22	6-534236-1
9	1.000	.900	20	6-534236-0
9	.900	.800	18	5-534236-9
9	.800	.700	16	5-534236-8
9	.700	.600	14	5-534236-7
9	.600	.500	12	5-534236-6
5	9	.500	10	5-534236-5
5	9	.400	8	5-534236-4
5	9	.300	6	5-534236-3
5	9	.200	4	5-534236-2
5	9	.100	-	2
5	9	.100	-	2

FINISH	A	B	NO OF POSN	PART NO.		
5	12	3	1.300	1.200	26	4-534236-1
3	4.000	3.900	80	4-534236-0		
3	3.900	3.800	78	3-534236-9		
3	3.800	3.700	76	3-534236-8		
3	3.700	3.600	74	3-534236-7		
3	3.600	3.500	72	3-534236-6		
3	3.500	3.400	70	3-534236-5		
3	3.400	3.300	68	3-534236-4		
3	3.300	3.200	66	3-534236-3		
3	3.200	3.100	64	3-534236-2		
12	3	3.100	62	3-534236-1		
12	3	3.000	60	3-534236-0		
12	3	2.900	58	2-534236-9		
12	3	2.800	56	2-534236-8		
12	3	2.700	54	2-534236-7		
12	3	2.600	52	2-534236-6		
12	3	2.500	50	2-534236-5		
12	3	2.400	48	2-534236-4		
12	3	2.300	46	2-534236-3		
12	3	2.200	44	2-534236-2		
12	3	2.100	42	2-534236-1		
12	3	2.000	40	2-534236-0		
12	3	1.900	38	1-534236-9		
12	3	1.800	36	1-534236-8		
12	3	1.700	34	1-534236-7		
12	3	1.600	32	1-534236-6		
12	3	1.500	30	1-534236-5		
12	3	1.400	28	1-534236-4		
12	3	1.300	26	1-534236-3		
12	3	1.200	24	1-534236-2		
12	3	1.100	22	1-534236-1		
12	3	1.000	20	1-534236-0		
12	3	.900	18	534236-9		
12	3	.800	16	534236-8		
12	3	.700	14	534236-7		
12	3	.600	12	534236-6		
12	3	.500	10	534236-5		
12	3	.400	8	534236-4		
12	3	.300	6	534236-3		
12	3	.200	4	534236-2		
12	3	.100	-	2		

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm [INCHES]

0 PLC ± -

1 PLC ± -

2 PLC ± -

3 PLC ± .005

4 PLC ± -

ANGLES ± -

FINISH

MATERIAL

6

TOLERANCES UNLESS OTHERWISE SPECIFIED:

3

9

DWN
R. BOLES
CHK
T. KINSEY
APVD
-
PRODUCT SPEC
108-25026
APPLICATION SPEC
114-25018
WEIGHT
-
CUSTOMER DRAWING

19-11-92
19-11-92
-
NAME
ASSEMBLY, MOD II DOUBLE ROW,
.100 X .100 C/L, VERTICAL MOUNTED,
CLOSED ENTRY, SHORT PT. CONTACTS
SIZE
A2
CAGE CODE
00779
DRAWING NO
C=534236
RESTRICTED TO
-
SCALE
4:1
SHEET
2 OF 2
REV
V2

1471-9 (3/11)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-534236-0](#)