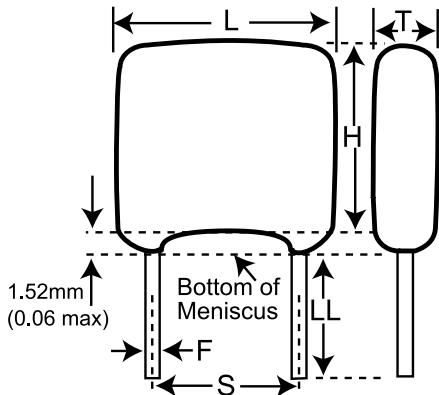


HV RAD-LDD Indust X7R HVHT200C, Ceramic, 0.027 uF, 10%, 3000 VDC, X7R, Commercial, High Temperature, HighVoltage,
 Lead Spacing = 17.78mm


General Information	
Series:	HV RAD-LDD Indust X7R HVHT200C
Style:	Radial
Description:	Commercial, High Temperature, HighVoltage
Features:	Commercial
RoHS:	Yes
Termination:	Nickel
AEC-Q200:	No

Dimensions	
L	20.83mm MAX
H	17.78mm MAX
T	8.89mm MAX
S	17.78mm +/-0.76mm

Specifications	
Capacitance:	0.027 uF
Capacitance Tolerance:	10%
Voltage DC:	3000 VDC
Temperature Range:	-55/+200°C
Temperature Coefficient:	X7R

Packaging Specifications	
Packaging:	Bulk, Bag

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.