


Technical drawing of the cable assembly showing cross-section and side view with dimensions.

Cross-section view (top):

- FLARE TO 8.30 [.327] ± 0.07
- .87 [.034]
- 22.40 [.883]
- 1.00 [.039]
- 1.70 [.067]

Side view (bottom):

- 2.50 [.098]
- 3.10 [.122]
- 4.70 [.185]
- RECOMMENDED CABLE STRIPPING DIM'S

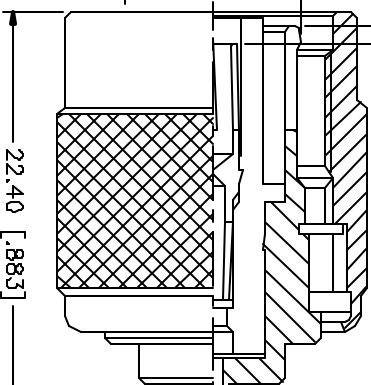

1. CRIMPED FERRULE
HEX CRIMP SIZE .128"
2. CRIMPED CONTACT PIN
SQ. CRIMP SIZE 0.7mm

Amphenol Connex

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[122429RP](#)