

M3FE40

400V 3A


特長

- 小型 SMD
- 耐湿性に優れ高信頼性
- 静電気耐性に優れている

Feature

- Small SMD
- High-Reliability
- High ESD Capability

■外観図 OUTLINE

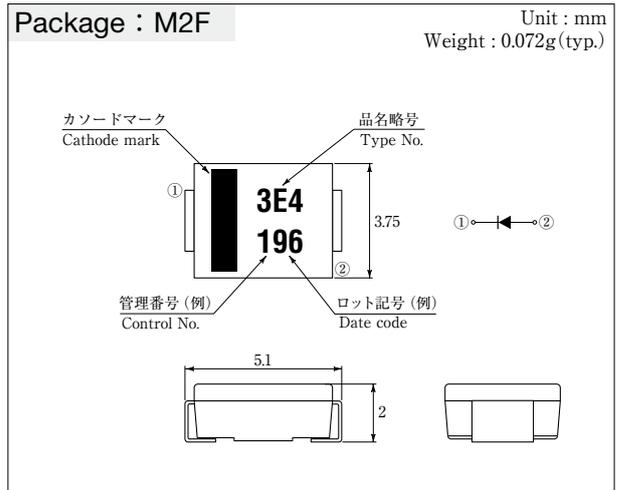

外形図については新電元 Web サイト又は〈半導体製品一覧表〉をご参照下さい。捺印表示については捺印仕様をご確認下さい。
For details of outline dimensions, refer to our web site or the Semiconductor Short Form Catalog. As for the marking, refer to the specification "Marking, Terminal Connection."

■定格表 RATINGS

●絶対最大定格 Absolute Maximum Ratings (指定のない場合は $T_l = 25^\circ\text{C}$ / unless otherwise specified)



項目 Item	記号 Symbol	条件 Conditions	品名 Type No.	M3FE40	単位 Unit
保存温度 Storage Temperature	T _{stg}			-55~150	℃
接合部温度 Operation Junction Temperature	T _j			150	℃
せん頭逆電圧 Maximum Reverse Voltage	V _{RM}			400	V
出力電流 Average Rectified Forward Current	I _O	50Hz 正弦波, 抵抗負荷 50Hz sine wave, Resistance load	プリント基板実装 On glass-epoxy substrate Ta=32℃	1.2	A
			T _l =76℃	3	
せん頭サージ順電流 Peak Surge Forward Current	I _{FSM}	50Hz 正弦波, 非繰り返し1サイクルせん頭値, T _j =25℃ 50Hz sine wave, Non-repetitive 1cycle peak value, T _j =25℃		75	A
電流二乗時間積 Current Squared Time	I ² t	1ms ≤ t < 10ms, T _c = 25℃		28	A ² s

●電氣的・熱的特性 Electrical Characteristics (指定のない場合は $T_l = 25^\circ\text{C}$ / unless otherwise specified)

順電圧 Forward Voltage	V _F	I _F = 3A, パルス測定 Pulse measurement	MAX 1.1	V
逆電流 Reverse Current	I _R	V _R = 400V, パルス測定 Pulse measurement	MAX 10	μA
静電気耐性 Electrostatic Discharge Capability	V _{ESD}	C = 150pF, R = 150Ω 極性±, 気中放電 Polarity±, Aerial discharge *1	TYP 30	kV
熱抵抗 Thermal Resistance	θ _{jl}	接合部・リード間, プリント基板実装 Junction to Lead, On epoxy-glass substrate	MAX 25	℃/W
	θ _{ja}	接合部・周囲間, プリント基板実装 Junction to Ambient, On epoxy-glass substrate	MAX 110	
	θ _{jc}	接合部・ケース間, プリント基板実装 Junction to Case, On epoxy-glass substrate	MAX 25	

*1: IEC-61000-4-2規定に準拠
It is based on IEC-61000-4-2.

■特性図 CHARACTERISTIC DIAGRAMS

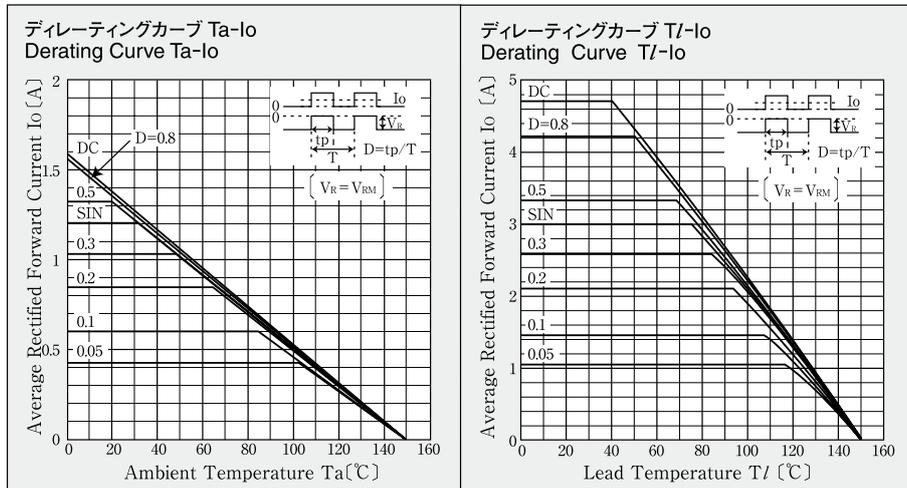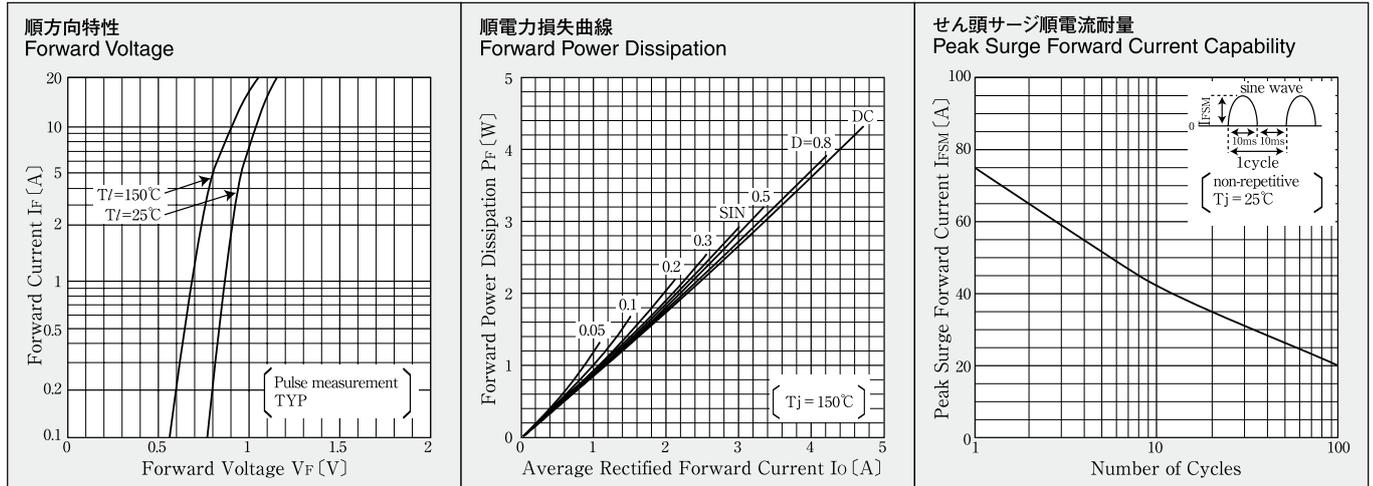

* Sine wave は 50Hz で測定しています。
 * 50Hz sine wave is used for measurements.
 * 半導体製品の特性は一般的にバラツキを持っており、Typical は統計的な実力を表しています。
 * Semiconductor products generally have characteristic variation. Typical is a statistical average of the device's ability.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Shindengen:](#)

[M3FE40-5063](#)