

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


PANDUIT PART NUMBER	STUD SIZE	DIMENSIONS - in [mm]				
		A ± .03 [0,8]	W ± .01 [0,3]	C ± .02 [0,5]	M ± .03 [0,8]	H ± .01 [0,3]
P4-10R	#10	1.40 [35,6]	.55 [14,0]	.50 [12,7]	1.12 [28,5]	.20 [5,1]
P4-14R	1/4"	1.40 [35,6]	.55 [14,0]	.50 [12,7]	1.12 [28,5]	.27 [6,9]
P4-56R	5/16"	1.46 [37,1]	.68 [17,3]	.50 [12,7]	1.12 [28,5]	.33 [8,4]
P4-38R	3/8"	1.46 [37,1]	.68 [17,3]	.50 [12,7]	1.12 [28,5]	.39 [9,9]
P4-12R	1/2"	1.55 [39,4]	.86 [21,8]	.53 [13,5]	1.12 [28,5]	.52 [13,2]

UL & CSA TOOL, DIES AND
NUMBER OF CRIMPS

TOOLS	DIES	NUMBER OF CRIMPS
CT-1701	P4	2
CT-2600	CD-2600-P4	1

NOTES:

- UL LISTED AND CSA CERTIFIED FOR:
A. #4 AWG STRANDED COPPER WIRE
B. 302°F (150°C) MAX TEMP RATING
C. 2000 VOLTS MAX
- SEE WWW.PANDUIT.COM FOR PACKAGE QUANTITIES
- MATERIAL:
A. STAMPING - .05" [1,27] THK COPPER, TIN PLATED
- DIMENSIONS IN BRACKETS ARE IN MILLIMETERS
- WIRE STRIP LENGTH: $1/2" \begin{smallmatrix} +1/32 \\ -0 \end{smallmatrix} [12,7mm \begin{smallmatrix} +0,8 \\ -0 \end{smallmatrix}]$

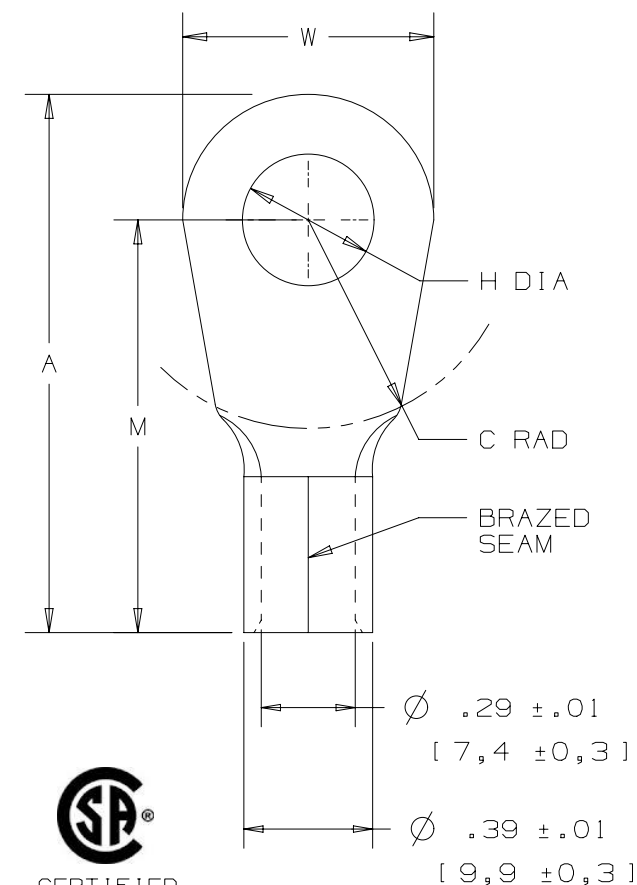

TITLE		#4 BARREL NON-INSULATED RING TONGUE	
ITEM REVISION NAME		CUSTOMER DRAWING	
N41213BB/10		PANDUIT	
DATASET FILE NAME		N41213BB/10	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		MATERIAL:	
.X ± .XXX ± .XX ± ANGLES ±		SEE NOTES	
THIRD ANGLE PROJECTION		DRAWING NUMBER:	
DAW		A41213	
DATE		SHT 1 OF 1	
CHK		A	
SCALE		NONE	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

[P2-38R-X](#) [P4-10R-E](#) [P2-56R-X](#) [P2-14R-T](#) [P2-14R-X](#) [P4-12R-T](#) [P2-12R-T](#) [P4-38R-T](#) [P2-56R-T](#) [P4-10R-T](#)