

SPECIFICATION CONTROL DRAWING

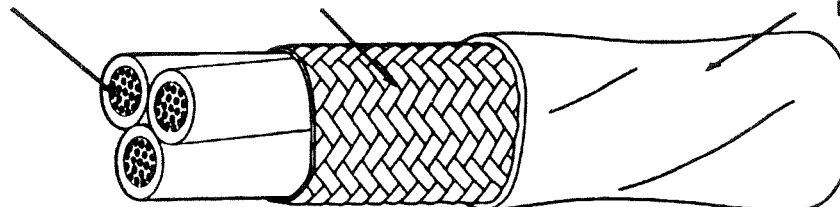
55PC213ATITLE
THREE CONDUCTOR CABLE, FLAT BRAID SHIELDED, JACKETED, 600 VOLTDate
3-15-95

Revision

This specification sheet forms a part of the latest issue of Raychem Specification 55PC.

COMPONENT WIRES - 55PC011A

SHIELD - TIN-COATED COPPER

JACKET - RADIATION-CROSSLINKED,
MODIFIED ETFE

CONSTRUCTION DETAILS

PART NUMBER	CONDUCTOR SIZE (AWG)	SHIELD STRAND THICKNESS ($\pm .0004$)	JACKET THICKNESS (in.)		DIAMETER (in.)			WEIGHT (lbs/1000 ft.)	
			LOWER SPEC LIMIT	TARGET WALL	LOWER SPEC LIMIT	TARGET VALUE	UPPER SPEC LIMIT	TARGET VALUE	UPPER SPEC LIMIT
55PC213A-26-	26	.0015	.0060	.0080	.087	.092	.097	7.13	7.65

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 150°C

Maximum continuous conductor temperature

VOLTAGE RATING: 600 volts (rms)

DIELECTRIC WITHSTAND: 1500 volts (rms), 60 Hz

CROSSLINKING PROOF TEST: 300 \pm 3°C for 1 hour

JACKET COLOR: White preferred

JACKET ELONGATION AND TENSILE STRENGTH:

Elongation, 50% (minimum)

Tensile Strength, 5000 lbf/in² (minimum)

JACKET FLAWS:

Spark Test, 1000 volts (rms), 60 Hz, 100% test

Impulse Dielectric Test, 6.0 kV (peak), 100% test

SHIELD COVERAGE: 85% (minimum)

VOLTAGE WITHSTAND TEST (POST ENVIRONMENTAL):

1000 volts (rms), 60 Hz, 1 minute

PART NUMBER:

The "" in the part numbers above shall be replaced
by a color code designators with a dash separating
the component wire color from the jacket color.

Example: AWG 26, red, blue and yellow component wires;
white jacket: 55PC213A-26-2/6/4-9

COLOR AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-881.

RaychemRaychem Corporation
300 Constitution Drive, Menlo Park, California 94025
1-800-2 Raychem Fax: 1-415-361-629

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[55PC213A-26-9/93/96-9](#)