
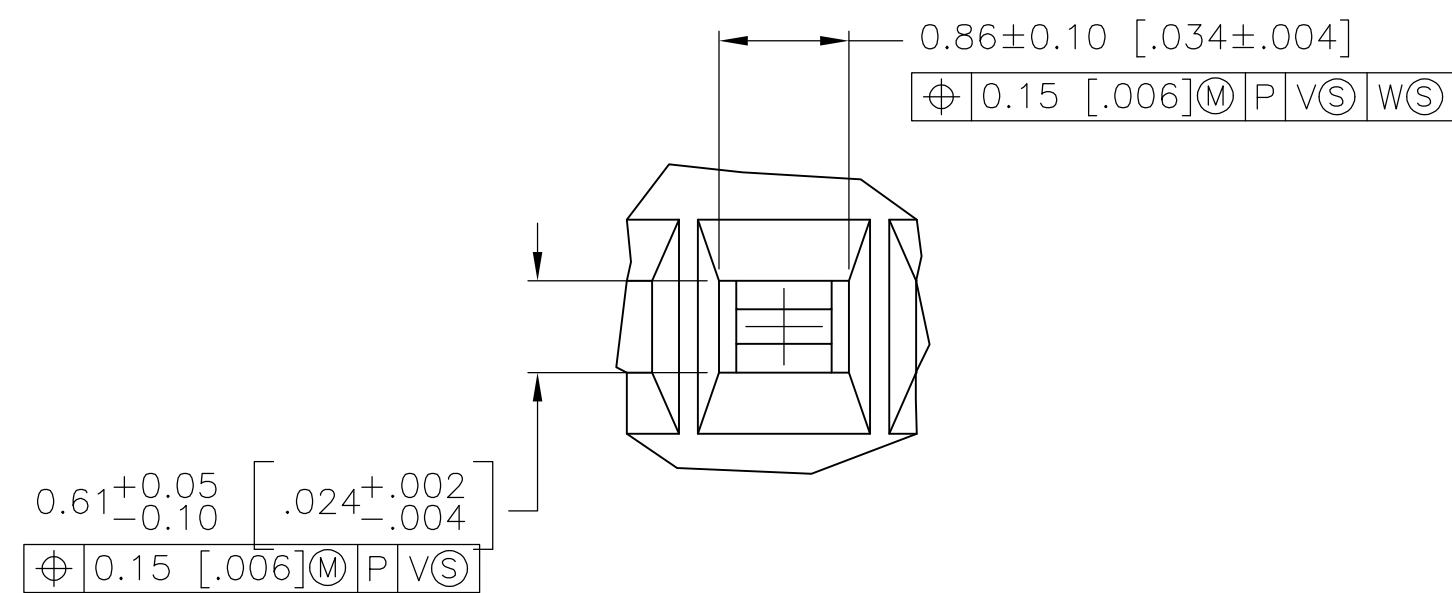
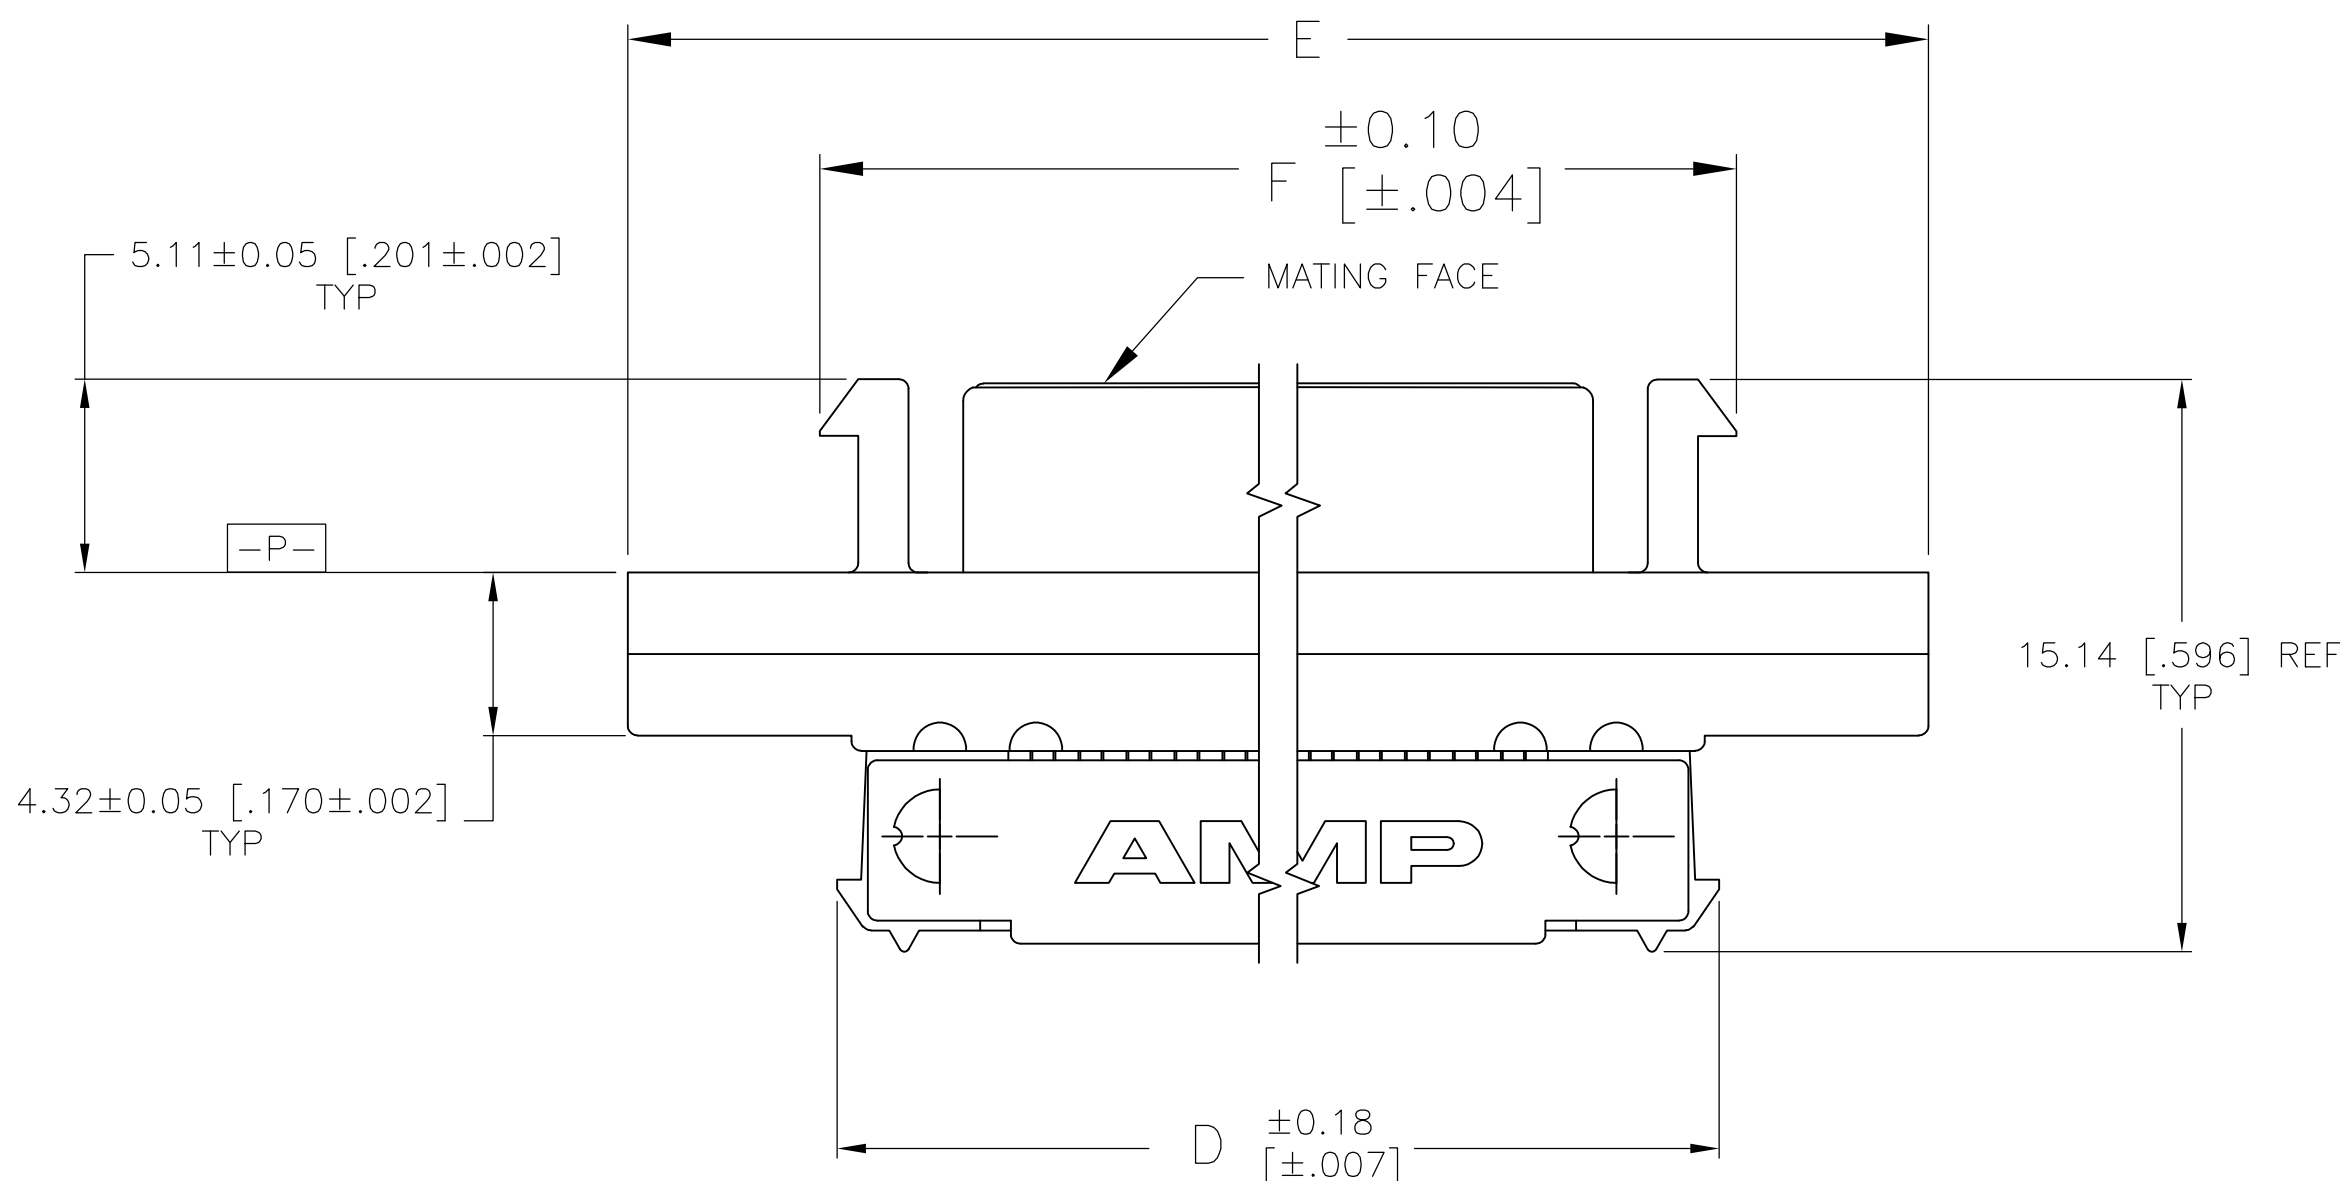
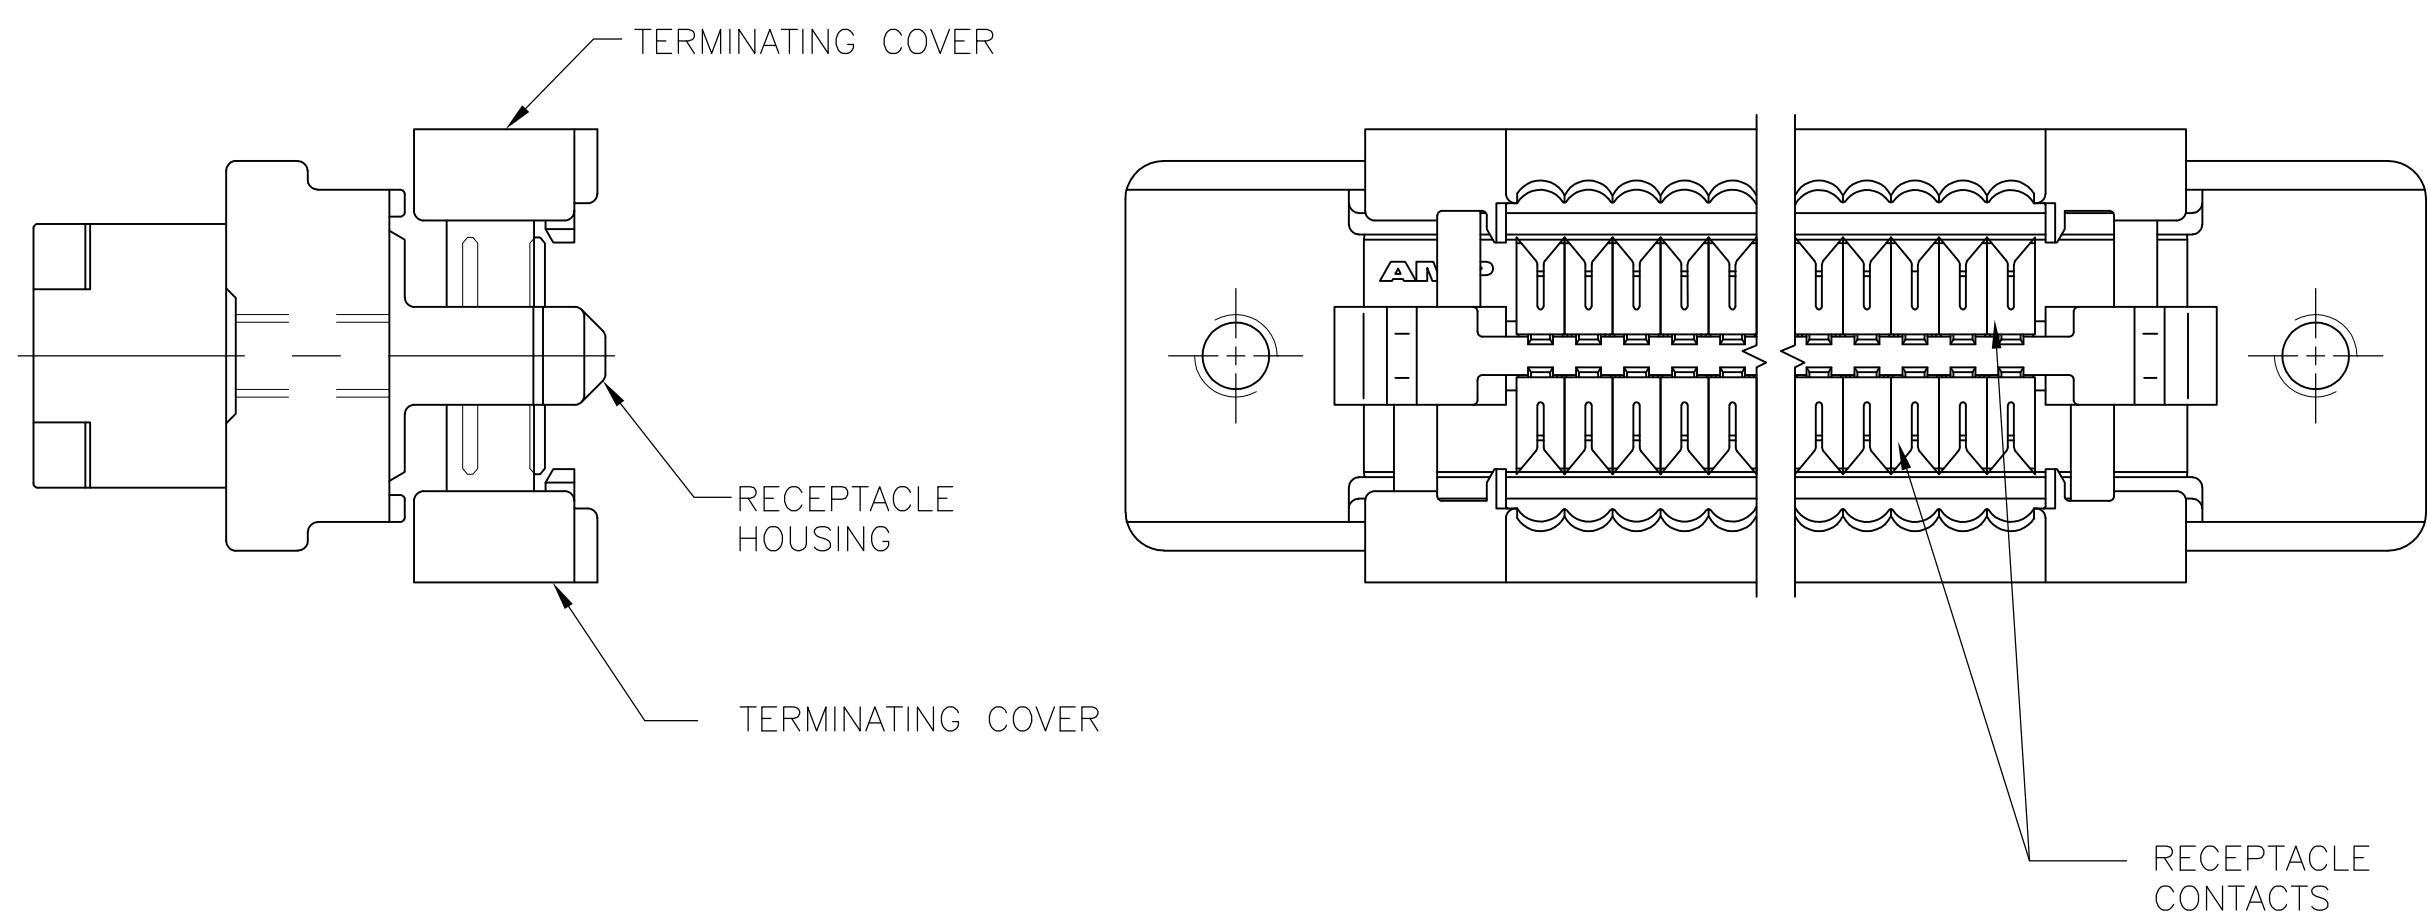


LOC	DIST	REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			S1	REVISED PER ECO-11-004835	11MAR11	RK	HMR

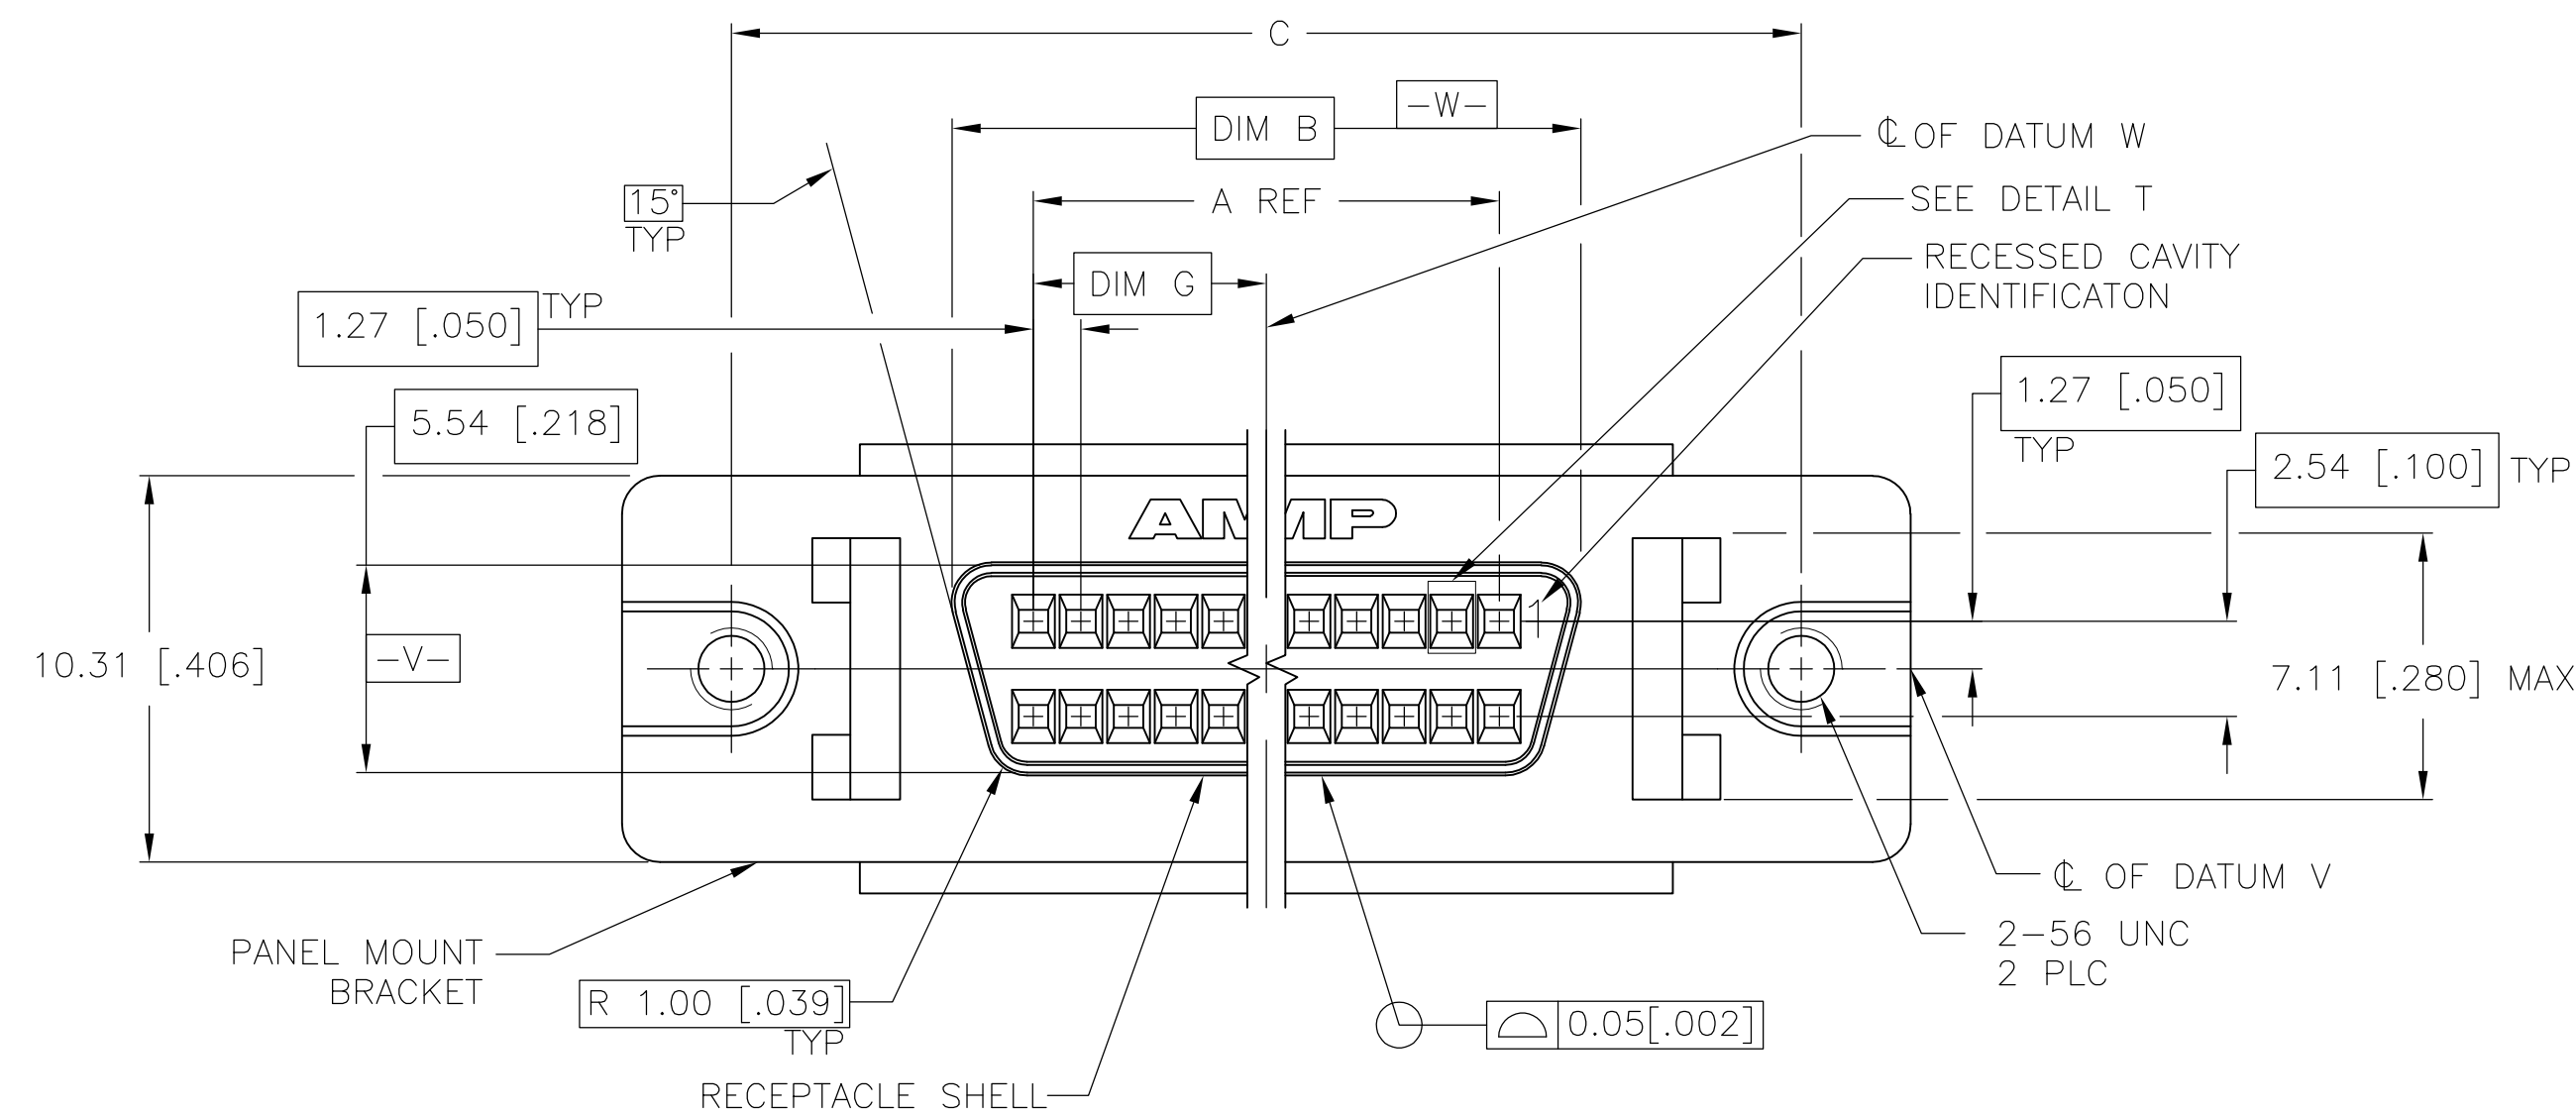

DETAIL T
SCALE 20:1
TYPICAL

- 1 MATERIAL:
RECEPTACLE CONTACTS- PHOSPHOR BRONZE.
RECEPTACLE SHELL- STEEL
PANEL MOUNT BRACKET- ZINC.
RECEPTACLE HOUSING AND TERMINATION COVERS- UL V-0 RATED THERMOPLASTIC, COLOR:
BLACK.
- 2 PLATING:
RECEPTACLE CONTACTS- EITHER $0.76\mu\text{m}$ [.000030] MIN GOLD PLATE OR GOLD FLASH OVER
PALLADIUM NICKEL PLATE, $0.76\mu\text{m}$ [.000030] MIN TOTAL IN CONTACT AREA, $1.27\mu\text{m}$ [.000050]
MIN TIN-LEAD IN TERMINATION AREA, ALL OVER $1.27\mu\text{m}$ [.000050] MIN NICKEL.
RECEPTACLE SHELL- $5.08\mu\text{m}$ [.000200] MIN NICKEL OVER $1.27\mu\text{m}$ [.000050] MIN COPPER.
PANEL MOUNT BRACKET- $5.08\mu\text{m}$ [.000200] MIN NICKEL OVER $7.62\mu\text{m}$ [.000300] MIN COPPER.
3. RECOMMENDED WIRE:
28 AWG OR 30 AWG, SOLID OR 7 STRANDED, PVC INSULATION WITH A $0.74-0.91$ [.029-.036]
INSULATION DIA.
- 4 OBSOLETE PART NUMBER.
- 5 PLATING:
RECEPTACLE CONTACTS- EITHER $0.76\mu\text{m}$ [.000030] MIN GOLD PLATE OR GOLD FLASH OVER
PALLADIUM NICKEL PLATE, $0.76\mu\text{m}$ [.000030] MIN TOTAL IN CONTACT AREA, $1.27\mu\text{m}$ [.000050]
MIN TIN IN TERMINATION AREA, ALL OVER $1.27\mu\text{m}$ [.000050] MIN NICKEL.
RECEPTACLE SHELL- $5.08\mu\text{m}$ [.000200] MIN NICKEL OVER $1.27\mu\text{m}$ [.000050] MIN COPPER.
PANEL MOUNT BRACKET- $5.08\mu\text{m}$ [.000200] MIN NICKEL OVER $7.62\mu\text{m}$ [.000300] MIN COPPER.

	NO	37.46 [1.475]	86.74 [3.415]	96.90 [3.815]	85.83 [3.379]	90.93 [3.580]	79.15 [3.116]	74.93 [2.950]	120	6-749656-0
	NO	20.96 [.825]	53.72 [2.115]	63.88 [2.515]	52.81 [2.079]	57.91 [2.280]	46.13 [1.816]	41.91 [1.650]	68	1-749656-2
	NO	15.24 [.600]	42.29 [1.665]	52.45 [2.065]	41.38 [1.629]	46.48 [1.830]	34.70 [1.366]	30.48 [1.200]	50	1-749656-1
	NO	37.46 [1.475]	86.74 [3.415]	96.90 [3.815]	85.83 [3.379]	90.93 [3.580]	79.15 [3.116]	74.93 [2.950]	120	1-749656-0
	NO	31.12 [1.225]	74.04 [2.915]	84.20 [3.315]	73.13 [2.879]	78.23 [3.080]	66.45 [2.616]	62.23 [2.450]	100	 749656-9
	NO	24.76 [.975]	61.34 [2.415]	71.50 [2.815]	60.43 [2.379]	65.53 [2.580]	53.75 [2.116]	49.53 [1.950]	80	 749656-8
	NO	20.96 [.825]	53.72 [2.115]	63.88 [2.515]	52.81 [2.079]	57.91 [2.280]	46.13 [1.816]	41.91 [1.650]	68	749656-7
	NO	18.42 [.725]	48.64 [1.915]	58.80 [2.315]	47.73 [1.879]	52.83 [2.080]	41.05 [1.616]	36.83 [1.450]	60	 749656-6
	NO	15.24 [.600]	42.29 [1.665]	52.45 [2.065]	41.38 [1.629]	46.48 [1.830]	34.70 [1.366]	30.48 [1.200]	50	749656-5
	NO	12.06 [.475]	35.94 [1.415]	46.10 [1.815]	35.03 [1.379]	40.13 [1.580]	28.35 [1.116]	24.13 [.950]	40	 749656-4
	NO	8.26 [.325]	28.32 [1.115]	38.48 [1.515]	27.41 [1.079]	32.51 [1.280]	20.73 [.816]	16.51 [.650]	28	 749656-3
	NO	5.72 [.225]	23.24 [.915]	33.40 [1.315]	22.33 [.879]	27.43 [1.080]	15.65 [.616]	11.43 [.450]	20	 749656-2
	NO	7.62 [.300]	27.05 [1.065]	37.21 [1.465]	26.14 [1.029]	31.24 [1.230]	19.46 [.766]	15.24 [.600]	26	 749656-1
FINISH	DATE CODE	G	F	E	D	C	B	A	NO OF POSN	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DRN M.MCCAFFREY 08/25/89 CHK J.BROSCHARD 09/05/89 APP'D R. WHITEMAN 10/24/89		 TE Connectivity	
DIMENSIONS: mm [INCHES]		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		NAME	
 0 PL/C ± — 1 PL/C ± — 2 PL/C ± 0.13 [.005] 3 PL/C ± — 4 PL/C ± — ANGLES FINISH ± —		PRODUCT SPEC 108-1228 APPLICATION SPEC 114-40029		RECEPTACLE CABLE ASSEMBLY, RAILLESS, PANEL MOUNT, AMPLIMITE .050 SERIES	
MATERIAL		WEIGHT		RESTRICTED TO —	
 SEE TABLE		CUSTOMER DRAWING		SCALE 5:1 SHEET 1 OF 1 REV. S	
		A1 00779 C=749656			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[749656-5](#)