

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

© COPYRIGHT 20

ALL RIGHTS RESERVED.

LOC
FT



DIST
0

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	C2	REVISED PER ECO-11-021326	04NOV2011	KH	MS

POLARIZATION KEY SLOT

CLAMPING SCREW

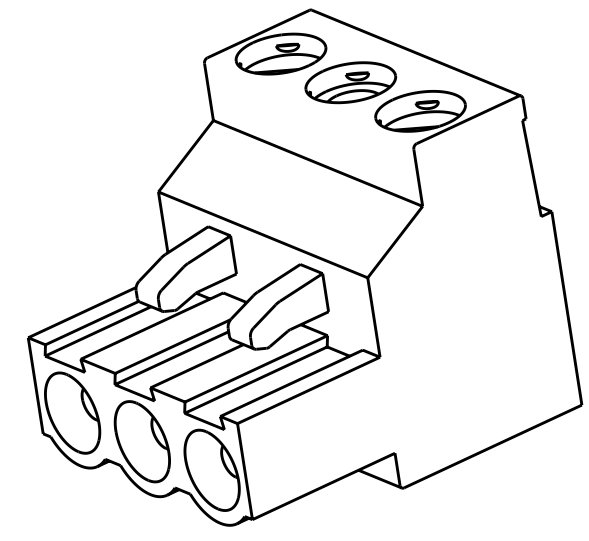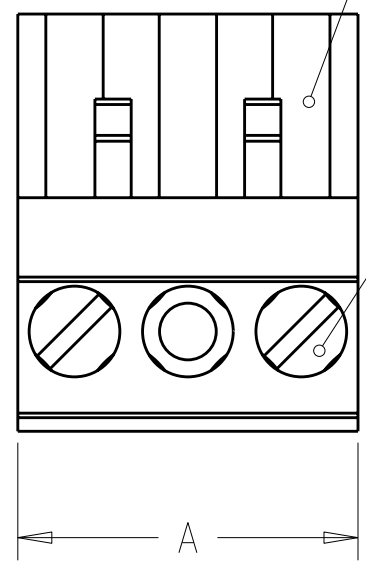

282808-2 AS SHOWN

- 1 MATERIALS AND FINISH
HOUSING: PA 6-6, UL 94-V0, COLOR GREEN.
CLAMP: BRASS, NICKEL PLATED.
DOUBLE SIDE CONTACT SPRING: PHOSPHOR BRONZE, TIN PLATED.
CLAMPING SCREW: M3, BRASS, NICKEL PLATED.
- 2 WIRE SIZE RANGE
SOLID WIRE: 0,03-2,5mm² (13AWG).
STRANDED WIRE: 0,03-1,5mm² (15AWG).
- 3 RECOGNIZED UNDER THE COMPONENT PROGRAM OF
UNDERWRITERS LABORATORIES INC., FILE° E60677.
- 4 IMQ CERTIFICATE WITH SURVEILLANCE IN
CONFORMITY WITH IEC 998-1/998-2-1.
- 5 NOT CUMULATIVE TOLERANCE.
- 6 PERMANENT MARKING, COLOR BLACK.

CLOSED CAVITY

WIRE ENTRY

2.5 REF

2.5 REF

10.0±0.1


15.5

RETENTION LATCH

MATING FACE

18.4

6	35	4	1-282808-4
	125	13	1-282808-3
	115	12	1-282808-2
	105	11	1-282808-1
	95	10	1-282808-0
	85	9	282808-9
	75	8	282808-8
	65	7	282808-7
	55	6	282808-6
	45	5	282808-5
	35	4	282808-4
	25	3	282808-3
	15	2	282808-2
DIM. A		NO OF POS.	PART NUMBER

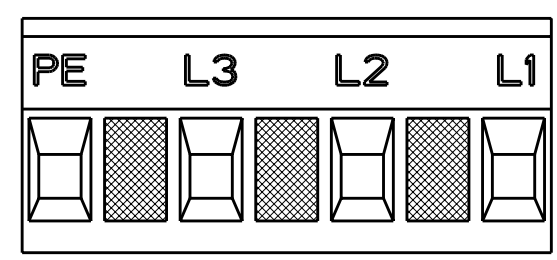

SCALE 2:1
1-282808-4 AS SHOWN

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	
	0 PLC ±0.2
	1 PLC ±0.25
	2 PLC ±0.25
	3 PLC ±0.25
	4 PLC ±0.25
	ANGLES ±2
MATERIAL	FINISH

DWN	23JUL2001
CHK	E. ZANOLINI
CHK	23JUL2001
APVD	D. BIEVENOUR
APVD	23JUL2001
PRODUCT SPEC	108-20166
APPLICATION SPEC	114-20079
WEIGHT	-
CUSTOMER DRAWING	



TE Connectivity

NAME				TERMINAL BLOCK PLUG 10mm PITCH -					
SIZE	CAGE CODE	DRAWING NO			RESTRICTED TO				
A3	00779	C-282808			-				
		SCALE	3:1	SHEET	1	OF	1	REV	C2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-282808-0](#)