


REVISIONS

ZONE	LTR	DESCRIPTION	DATE	APPROVED
	0	RELEASED		
A		ECO-08-024894	PY 7-10	BW

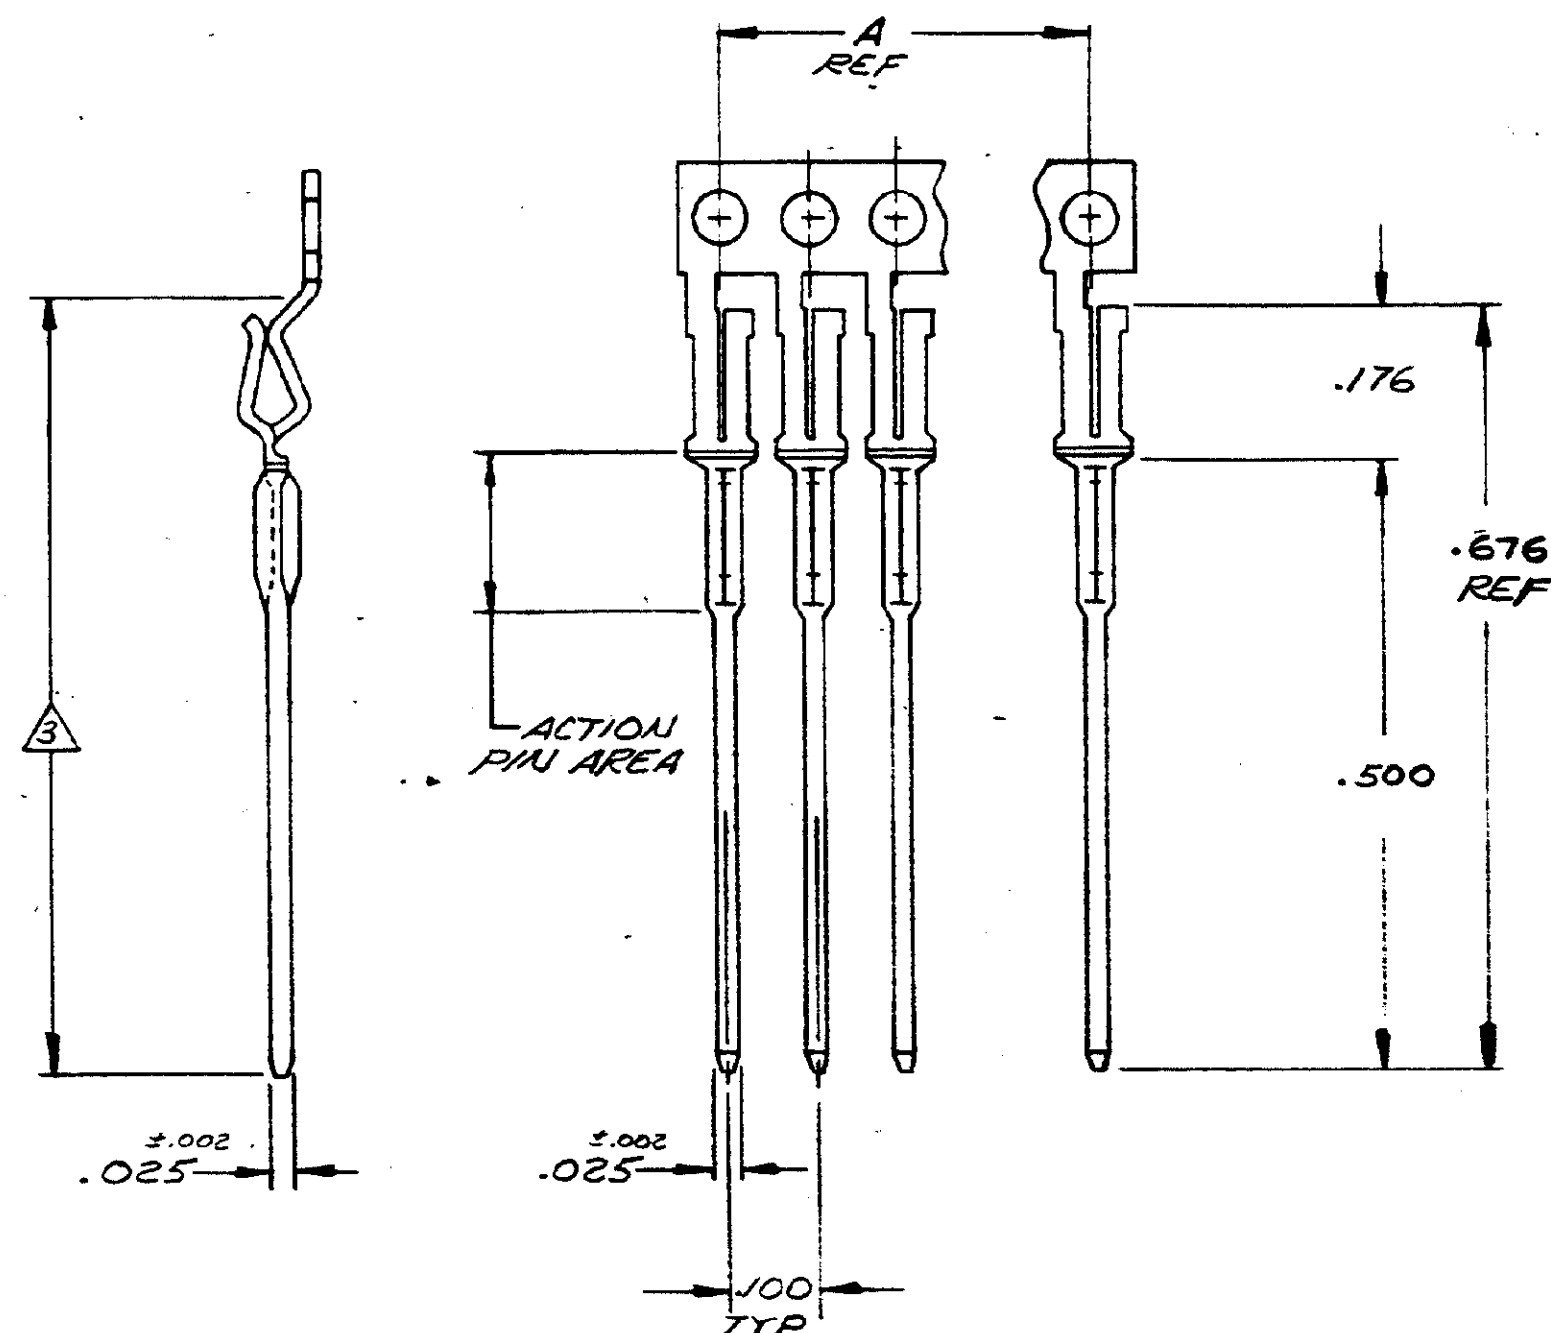


1. REFER TO DRAWING 117178 FOR
TYPICAL CONNECTOR SYSTEM
APPLICATION & CARRIER STRIP REMOVAL
2. PLATING IS NOT REQUIRED ON
CARRIER STRIP.
3. GOLD PL (MIL-G-45204) .000050
MIN THK OVER NICKEL PL (QQ-N-290)
.000100 MIN THK.

A TYPE HOLE

.041 ± .005 DIA HOLE IS REQUIRED
FOR ASSEMBLY INTO PLATED THRU
HOLES PRIOR TO REFLOW SOLDER
OPERATION. .036 TO .043 DIA HOLE IS
REQUIRED FOR PRESS FIT APPLICATIONS.

SECTION X-X

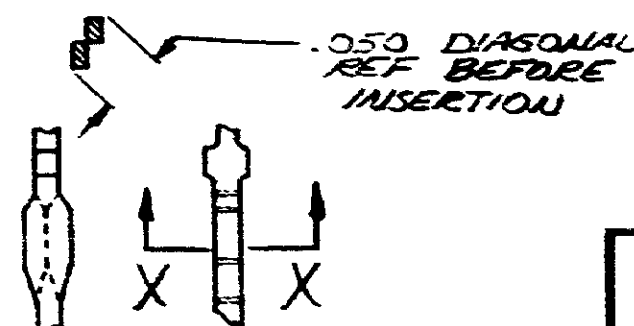

ACTION PIN AREA

REFER TO AMP SPEC 106-14018
OR 106-14019 AS APPLICABLE
FOR SPECIFIC HOLE SIZE
RECOMMENDATIONS.

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES
TOLERANCES ON:
DECIMALS ± .008 ANGLES ± 5°

MATERIAL

BERYLLIUM
COPPER
(QQ-C-533)

REEL NO. 119272-4

DR 9-4-86

CHK 9-4-86

APPD 9-4-86

REL 9-4-86

DESIGN APPD

OTHER APPD



AMP INCORPORATED
HARRISBURG, PENNSYLVANIA

NAME
ECONOMATE II,
COMB CONTACT, RECEPTACLE,
.025 X .025 E

SIZE CODE IDENT NO. NUMBER
C 00779 533305

SCALE SHEET 1 of 1

CUSTOMER DRAWING

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[533305-9](#)