




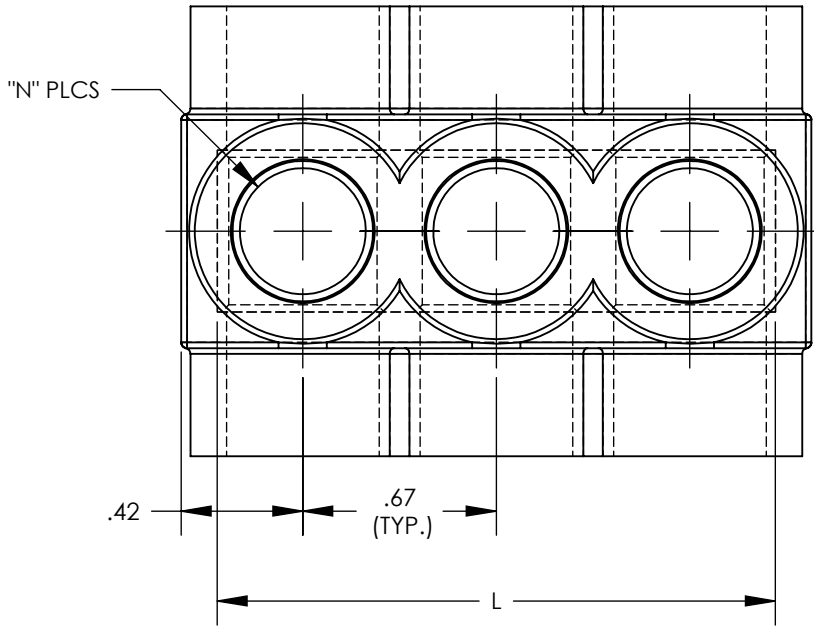


THREE PORT CONNECTOR BLOCK SHOWN WITH PLASTIC CLOSURE PLUGS REMOVED. SEE TABLE FOR DIMENSIONS OF PARTS WITH ADDITIONAL PORTS

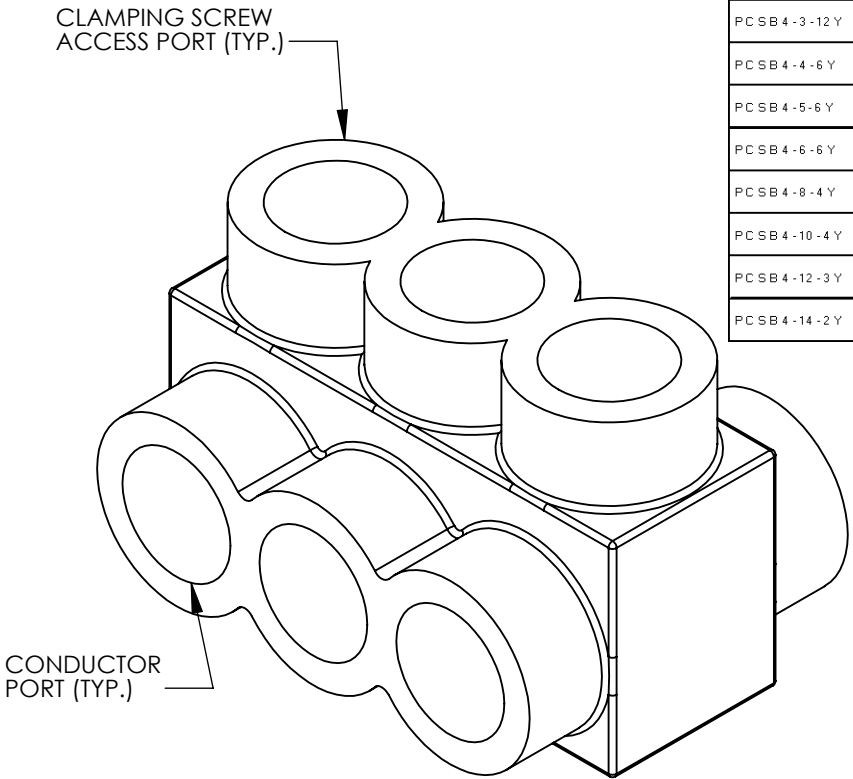

PANDUIT FINISHED GOODS P/N	CONDUCTOR RANGE	HEX KEY	SCREW QTY.	CAP (SCREW PORT) QTY.	CAP (WIRE PORT) QTY.	A	L	N	TIGHTENING TORQUE
PCSB4-2-12Y	# 4 - # 14 STR # 10 - # 14 SOL	1/8	2	2	4	1.23	0.982	2	50 in/lbs
PCSB4-3-12Y		1/8	3	3	6	1.76	1.512	3	
PCSB4-4-6Y		1/8	4	4	8	2.29	2.042	4	
PCSB4-5-6Y		1/8	5	5	10	2.82	2.572	5	
PCSB4-6-6Y		1/8	6	6	12	3.35	3.102	6	
PCSB4-8-4Y		1/8	8	8	16	4.41	4.162	8	
PCSB4-10-4Y	# 4 - # 14 STR # 10 - # 14 SOL	1/8	10	10	20	5.47	5.222	10	
PCSB4-12-3Y		1/8	12	12	24	6.53	6.282	12	
PCSB4-14-2Y		1/8	14	14	28	7.59	7.342	14	

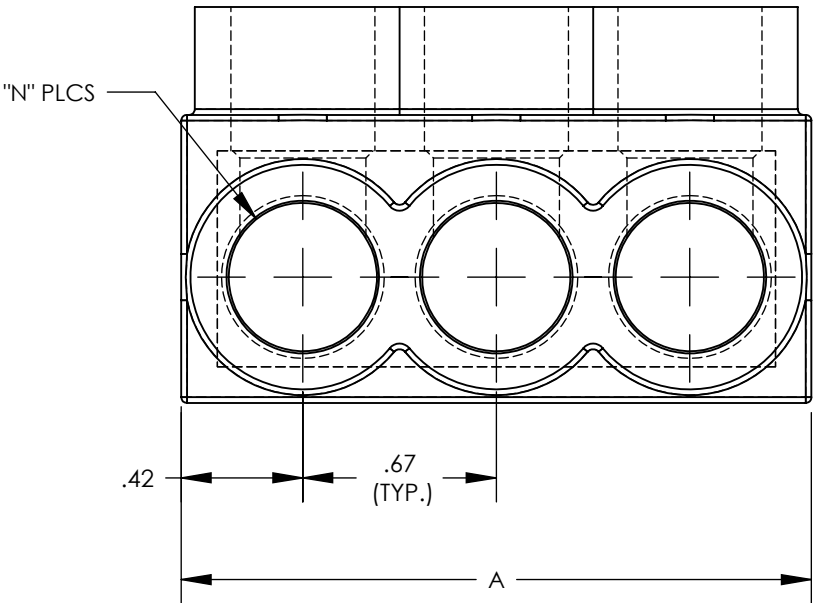

- NOTES:
- UL486A-UL486B LISTED, DUAL RATED CU9AL FOR ALUMINUM OR COPPER CONDUCTORS. MEETS OR EXCEEDS ANSI C119.4
 - SEE TABLE FOR WIRE RANGE.
 - STRIP LENGTH: .50 +.06/-0
 - FOR TIGHTENING TORQUE SEE TABLE
 - VOLTAGE RATING: 600 V. MAX. BUILDING WIRE, 1000 V. MAX. IN SIGNS & FIXTURES.
 - TEMPERATURE RATING: 90°C (CU9AL).
 - CONNECTOR BLOCK BODY ARE MADE FROM ALUMINUM. CONDUCTOR PORTS IN CONNECTOR BLOCK ARE PREFILLED WITH AN OXIDE-INHIBITING COMPOUND.
 - CONNECTOR TO INCLUDE TIN PLATED ALUMINUM CLAMPING SCREWS FOR EACH CONDUCTOR PORT.
 - INSULATION MATERIAL IS CLEAR PVC.
 - CLAMPING SCREW ACCESS PORTS AND ALL WIRE ENTRY PORTS ARE PROVIDED WITH REMOVABLE PLASTIC CLOSURE PLUGS.
 - ALL DIMENSIONS SHOWN ARE NOMINAL.
 - ONLY ONE CONDUCTOR PER PORT ALLOWED.
 - PACKAGE QTY: -12 = 12 PCS.
-6 = 6 PCS.
-4 = 4 PCS.
 - THIS PART IS RoHS COMPLIANT

							TITLE MULTI-TAP INSULATED CONNECTORS PCSB4 SERIES CUSTOMER DRAWING						
							ITEM REVISION NAME N41573BB-C41573/05		PANDUIT				
							DATASET FILE NAME C41573/05.SLDDRW						
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		MATERIAL SEE NOTES				
							.X ± .XX ± .02  THIRD ANGLE PROJECTION						
00	2/13	JHNU	JHNU	RGB		REVISED TITLE BLOCK	N41573BB-C41573	DRAWING NUMBER C41573_05					
REV	DATE	BY	CHK	APR	DESCRIPTION		ECN	DRAWN BY MS	DATE 8/99	CHK RLS	SCALE NONE	SHEET 1 OF 1	SIZE B

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

[PCSB4-3-12Y](#) [PCSB4-14-2Y](#) [PCSB4-12-3Y](#) [PCSB4-10-4Y](#) [PCSB4-5-6Y](#) [PCSB4-6-6Y](#) [PCSB4-4-6Y](#) [PCSB4-8-4Y](#)
[PCSB4-2-12Y](#)