
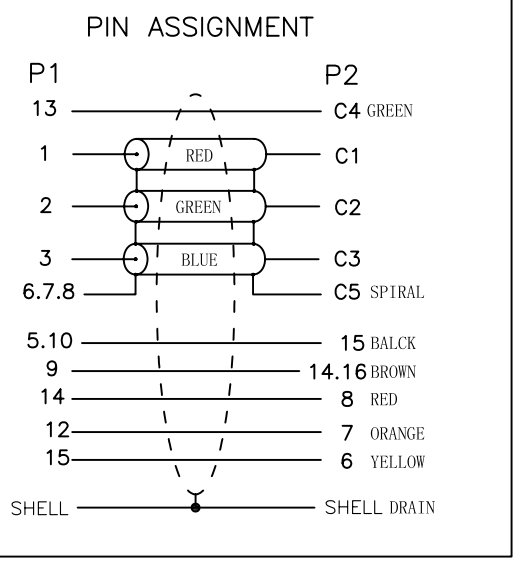


Electronic Test:  
 1.100% Test,(Open,Short,Miss Wire)  
 2.Contact Resistance:2 ohm max.  
 3.Insulation Resistance:10M ohm min.  
 4.Hi-Pot:300V DC/10ms  
 5.BENDING TEST:ANGLE 90°,BENDING 2~3 TIMES UP AND DOWN.

**CnC Tech, LLC**  
 Industrial Cable and Connector Technology

DRAWN BY	LYNDON	DARWING NO.	VG/LJQ-094-016
CHECKED BY		CUSTOMER	CNC
APPROVAL BY		ITEM NO.	751-20010-00300
DECIDE BY		DATE	2012-02-14
VERSIONS/EDITED	A/0	PROJECTION	

NO.	NAME	Q'TY	SPECIFICATION
⑬	TUBE	6	HEAT SHRINK TUBE BLACK OD3.0mm L=8mm.
		2	HEAT SHRINK TUBE BLACK OD2.0mm L=15mm.
		2	HEAT SHRINK TUBE BLACK OD1.0mm L=25mm.
⑫	COPPER FOIL	1	DOUBLE-SIDED CONDUCTIVE COPPER FOIL W25mm L=60mm.
⑪	COPPER FOIL	1	DOUBLE-SIDED CONDUCTIVE COPPER FOIL W30mm*L75mm
⑩	IN JACKET	4.0g	INNER MOID: CLEAR LDPE
⑨	IN JACKET	6.5g	CLEAR PE(NM-15)
	OUT JACKET	21g	WHITE(EC-005/W-18#) PVC 50P(WM-17)
⑧	OUT JACKET	23g	OUTER MOLD:45P PVC BLUE(PT:661C/BE-54#).
⑦	OUT JACKET	20g	BLACK PVC 45P (CH-002)
⑥	FERRITE	2	Core:RH17.5*10.6*28.5mm
⑤	SCREW	2	SCREW:HD40.5 #4-40UNC PLATED NI MOLD:BLUE(PT:661C/BE-54#).ABS
④	SCREW	2	SCREW #4*40UNS Ø2.8*L32mm NICKEL MOLD WHITE(EC-005/W-18#) ABS
③	CONN	1	HD15P MALE INSULATION BLUE.SHELL NICKEL,PIN GOLD FLASH.
②	CONN	1	DVI(18+5) MALE INSULATION BLACK.SHELL NICKEL,PIN GOLD FLASH.
①	CABLE	1	UL20276 [30AWG*3Coax+28AWG*7C]+AL/MY+D.W+BD+JACKET:BLACK AMOMIZER OD:7.0±0.15mm L=3000+50/-0mm.

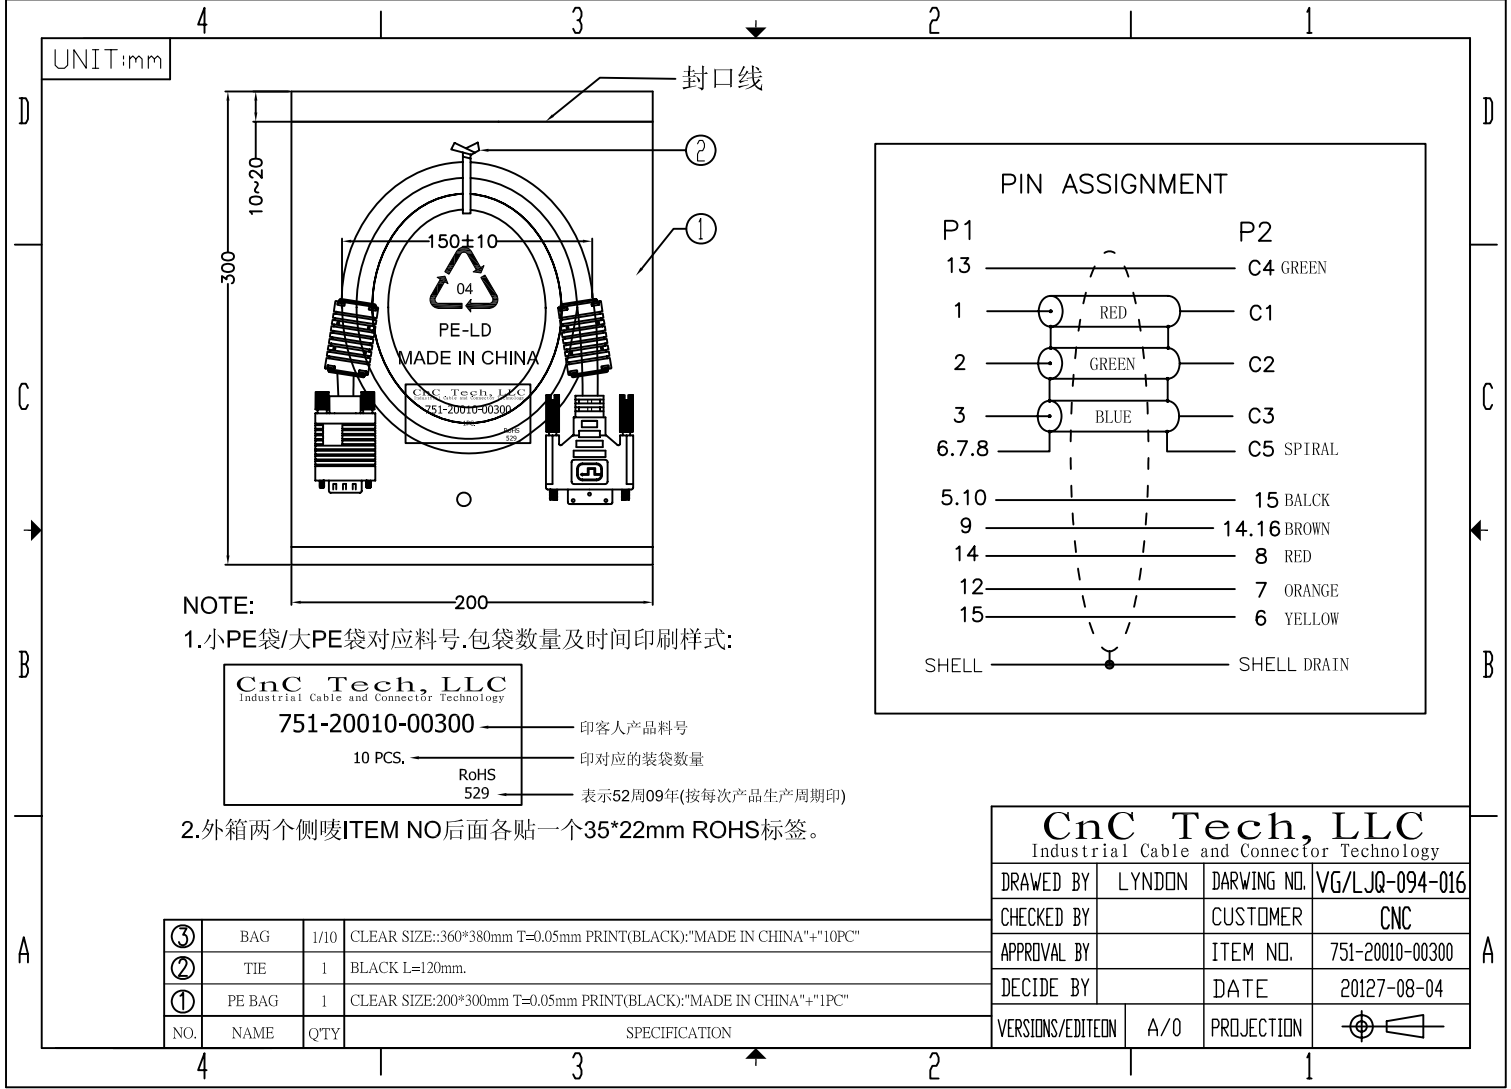

**NOTE:**  
 1.小PE袋/大PE袋对应料号.包装袋数量及时间印刷样式:  
  
 印客人产品料号  
 印对应的装袋数量  
 表示52周09年(按每次产品生产周期印)

2.外箱两个侧唛ITEM NO后面各贴一个35\*22mm ROHS标签。

NO.	NAME	Q'TY	SPECIFICATION
③	BAG	1/10	CLEAR SIZE::360*380mm T=0.05mm PRINT(BLACK):"MADE IN CHINA"+10PC"
②	TIE	1	BLACK L=120mm.
①	PE BAG	1	CLEAR SIZE:200*300mm T=0.05mm PRINT(BLACK):"MADE IN CHINA"+1PC"

**CnC Tech, LLC**  
 Industrial Cable and Connector Technology

DRAWN BY	LYNDON	DARWING NO.	VG/LJQ-094-016
CHECKED BY		CUSTOMER	CNC
APPROVAL BY		ITEM NO.	751-20010-00300
DECIDE BY		DATE	20127-08-04
VERSIONS/EDITED	A/0	PROJECTION	