


D


C


B

A

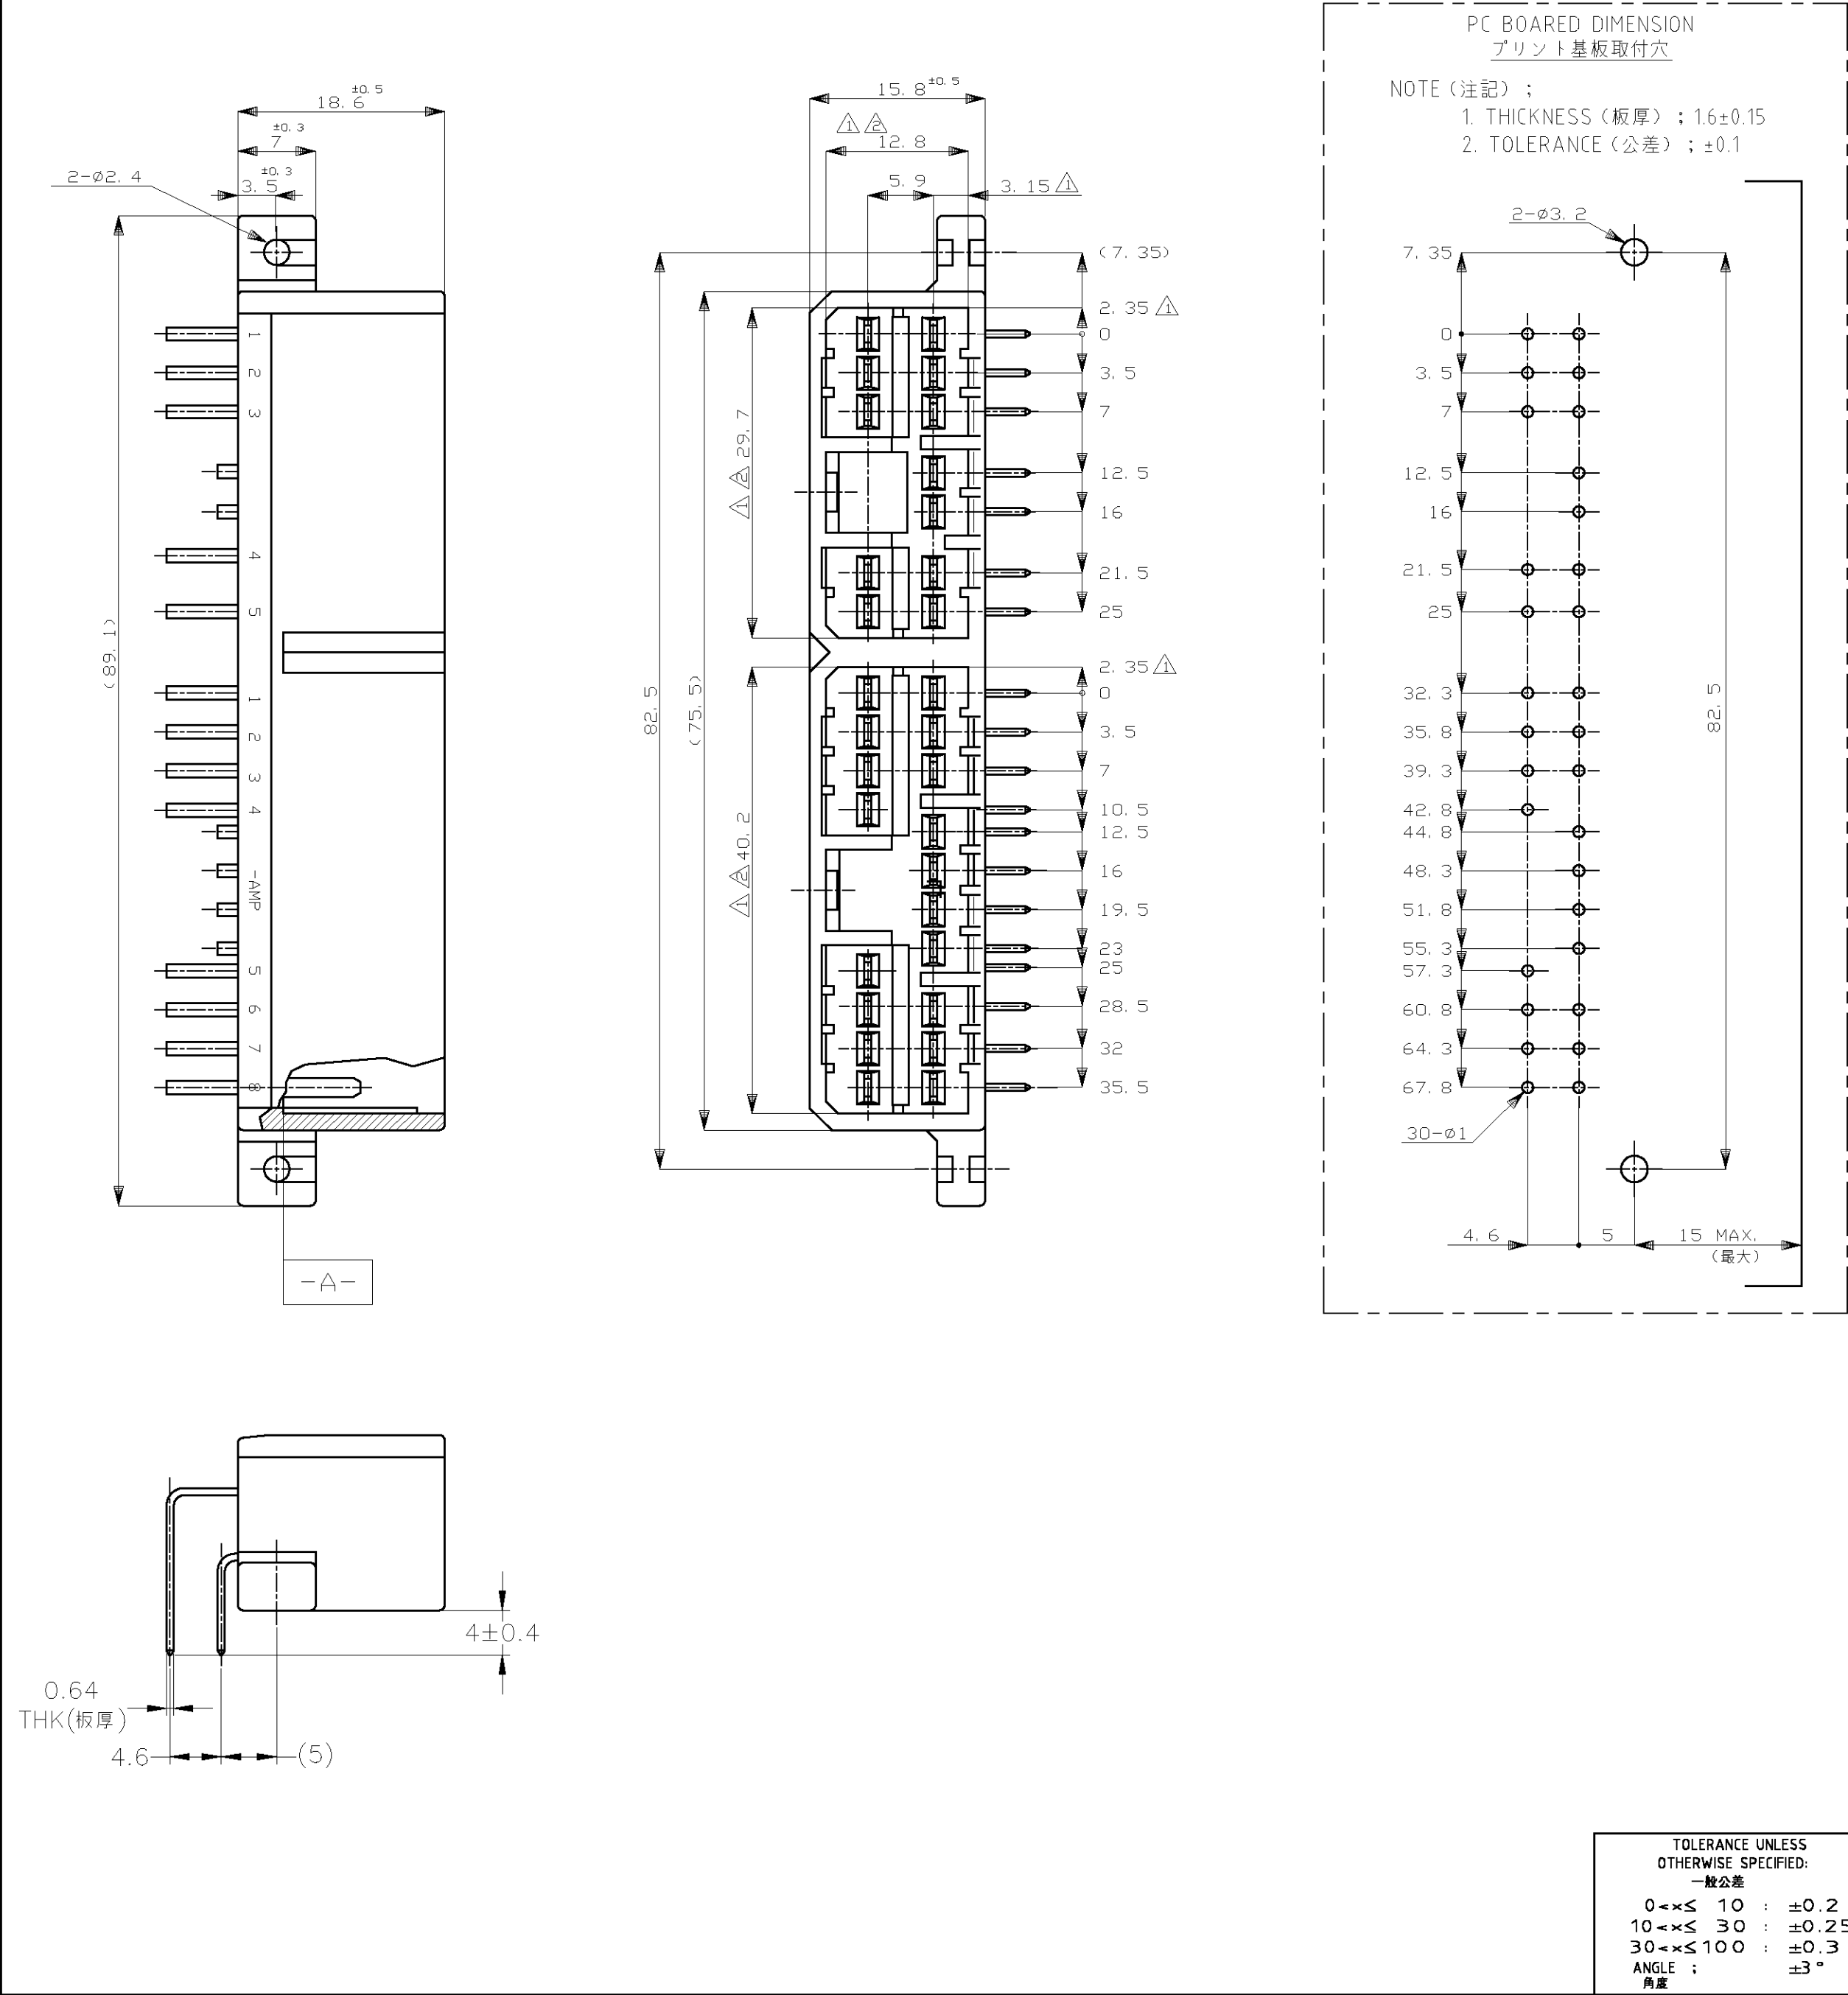

- △ -Z- 面より2mmの範囲で測定。
△ 相手ハウジングと所定の機能を満足して嵌合できること
3. プリント基板への取付は、JIS B1115又は
1122 M3×6ナベ（2種又は4種）のタッピンネジ
で締付けた後ハンダ付する（締付けトルク：0.4N-m 以下）
△ 回路番号：下図参照のこと。
- △ TO BE MEASURED BETWEEN -Z- AND 2
△ TO BE MATE WITH PLUG HSG SMOOTHLY
3. TO BE USE M3 TAPPING SCREW JIS
B1115 OR 1122 (TYPE 2 OR 4) BEFORE SOLDER
△ CIRCUIT NUMBER.

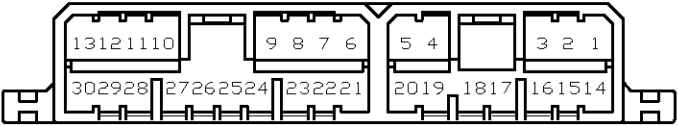

HB	1~30 (全極)	SELECTIVE-TIN (MATTE)		SELECTIVE GOLD	WHITE	2-5173866-1
	1~30 (全極)	TIN-LEAD		SELECTIVE GOLD	GREEN	2-173866-4
	SEE 4-173866-2					4-173866-2
	SEE 4-173866-1					4-173866-1
V-2		PRE-TIN			WHITE	9-173866-1
HB	1~30 (全極)	TIN-LEAD		SELECTIVE GOLD	WHITE	2-173866-1
		PRE-TIN			GRAY	173866-6
		PRE-TIN			GREEN	173866-4
		PRE-TIN			WHITE	173866-1
FLAMMABILITY OF MATERIAL 使用材料難燃グレード	金めっきタブ回路NO. SELECTIVE GOLD CIRCUIT NO. 	SOLDERING SIDE 半田付け部		CONTACT SIDE 接触部側	色 COLOR	型番 PART NUMBER
		CONTACT 仕上げ FINISH OF CONTACT				
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN T.SHINOHARA 19SEP03	 Tyco Electronics Corporation Kawasaki, Japan			
DIMENSIONS: 単位： 特 mm		CHK K.BETSUI 19SEP03				
	TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差	APVD K.BETSUI 19SEP03	NAME 名称 070 SERIES MULTI-LOCK I/O CONNECTOR 30POSITION CAP HOUSING ASSEMBLY			
		PRODUCT SPEC 製品規格 108-5216				
		APPLICATION SPEC 取付適用規格	SIZE CAGE CODE DRAWING NO 番号 A200779C-173866			
		—				
MATERIAL 材料	FINISH 仕上	WEIGHT 16.4g	RESTRICTED TO			
HOUSING: PBT CONTACT: BRASS		CUSTOMER DRAWING		SCALE 尺度 2:1	SHEET 1 OF 1	REV H3

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-5173866-1](#)