
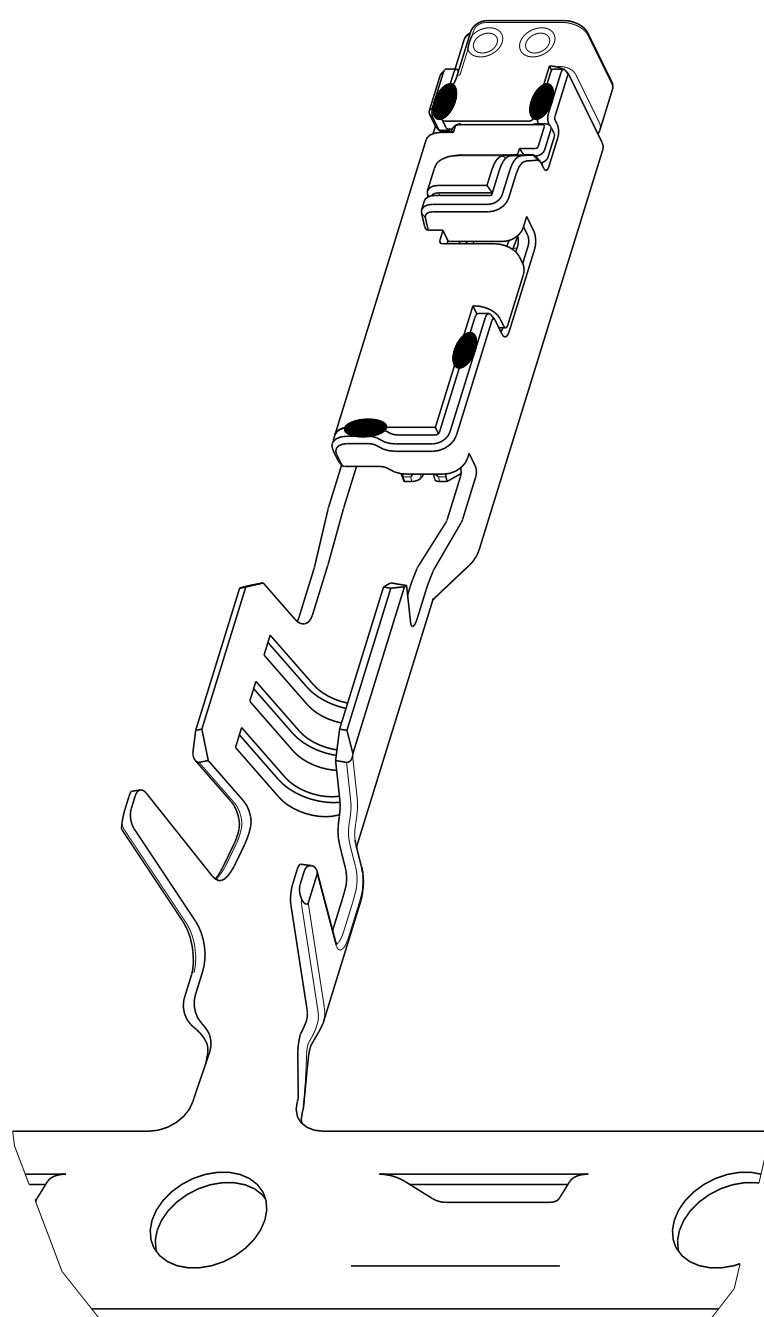
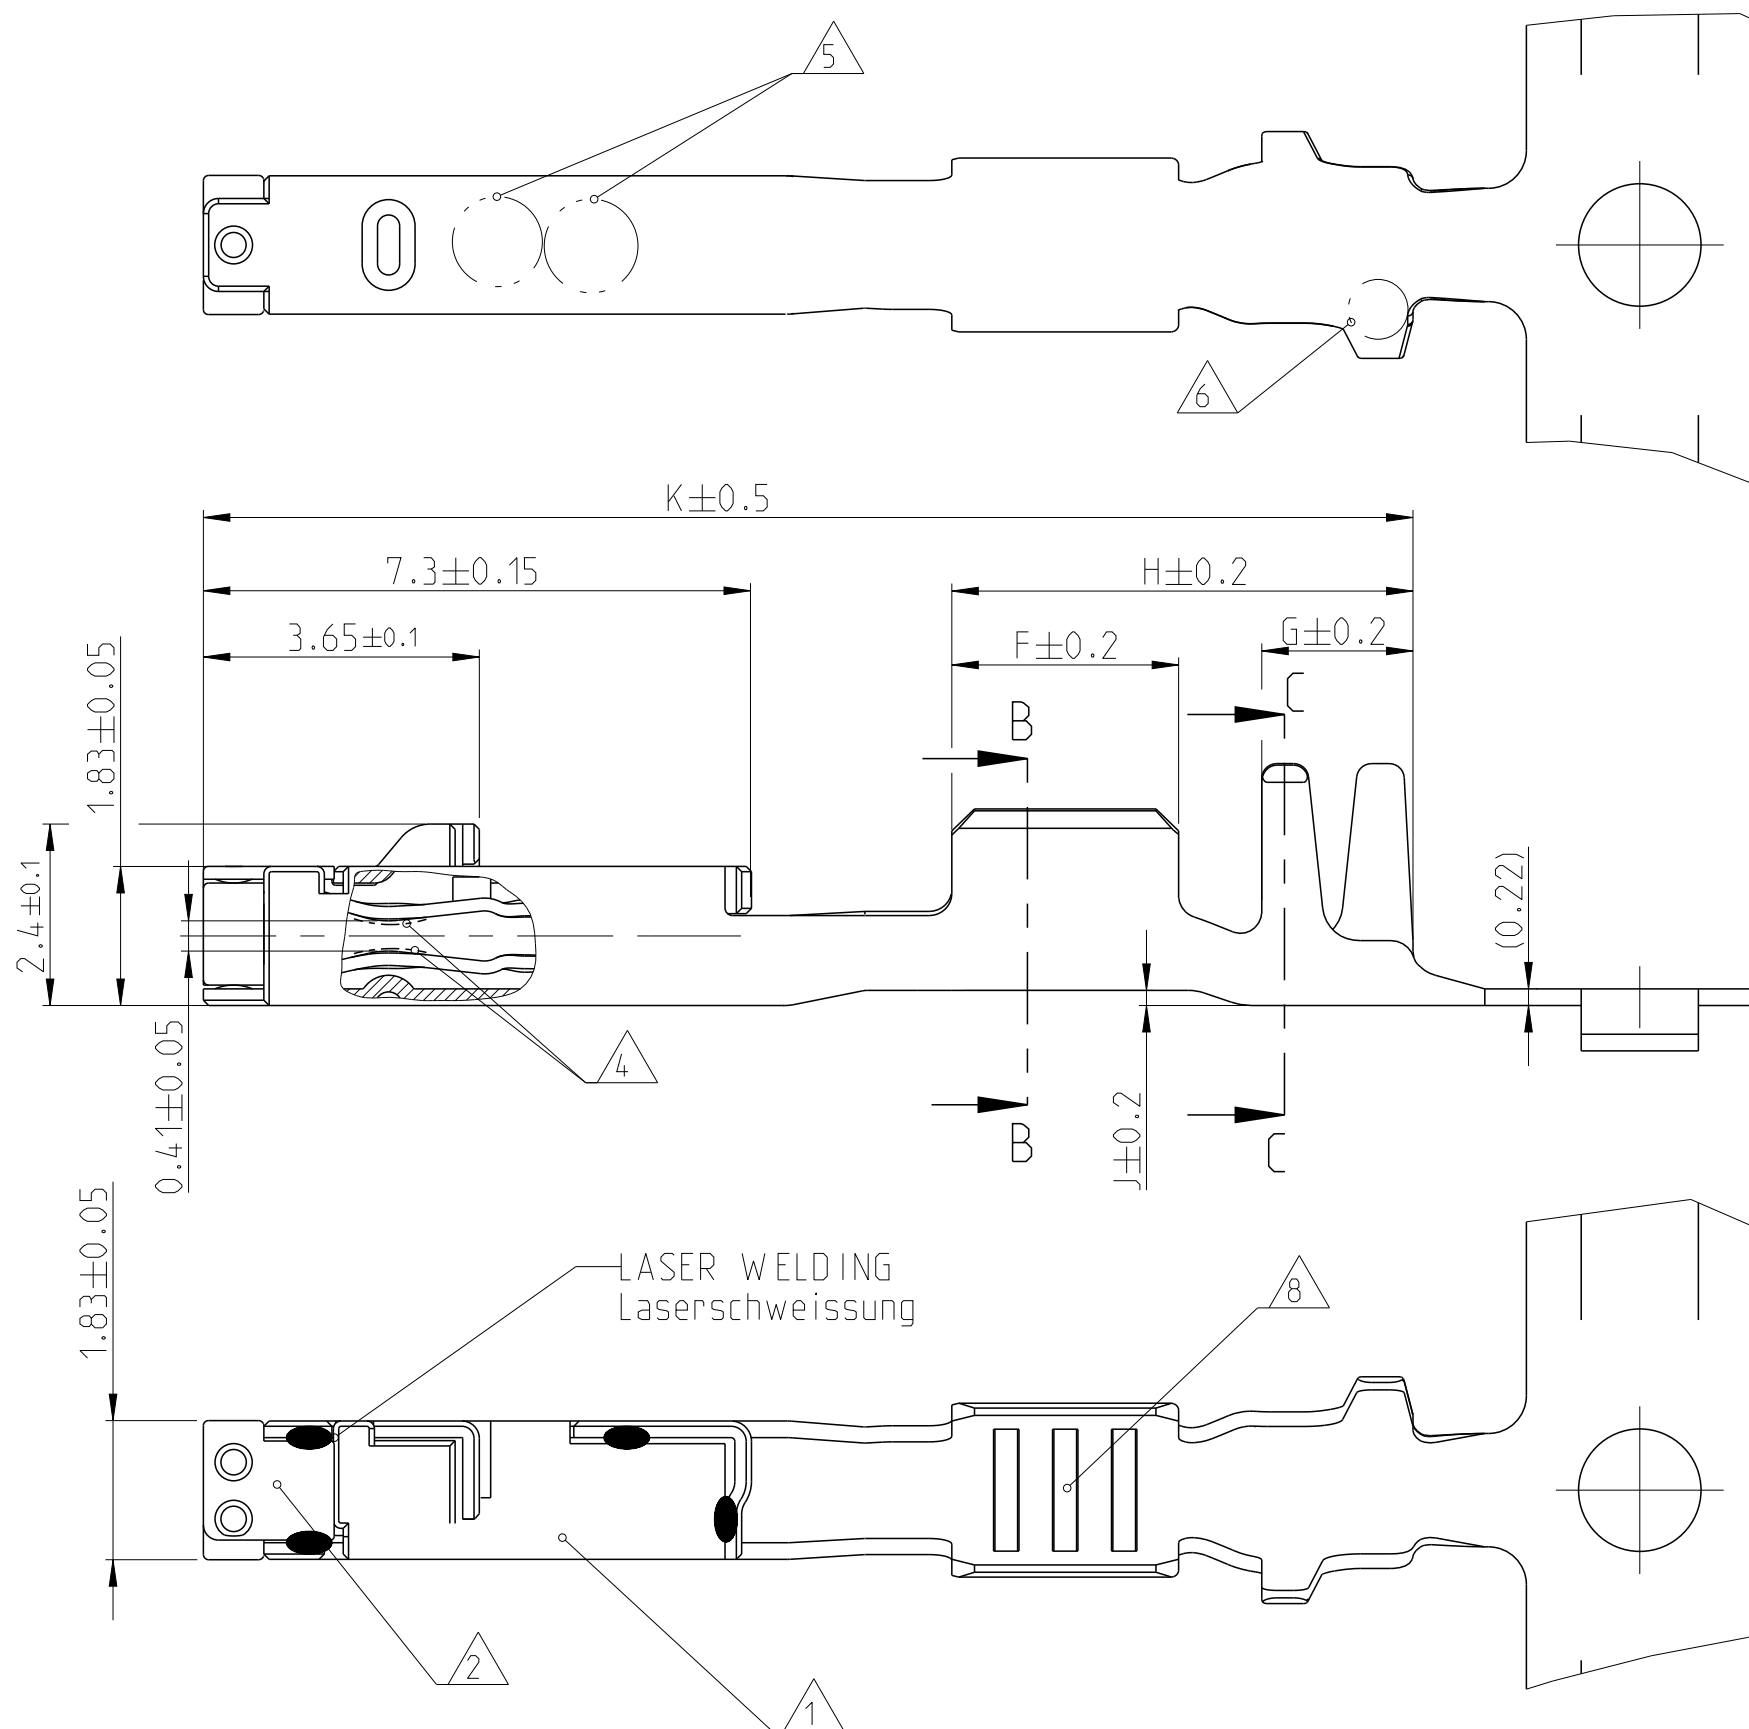


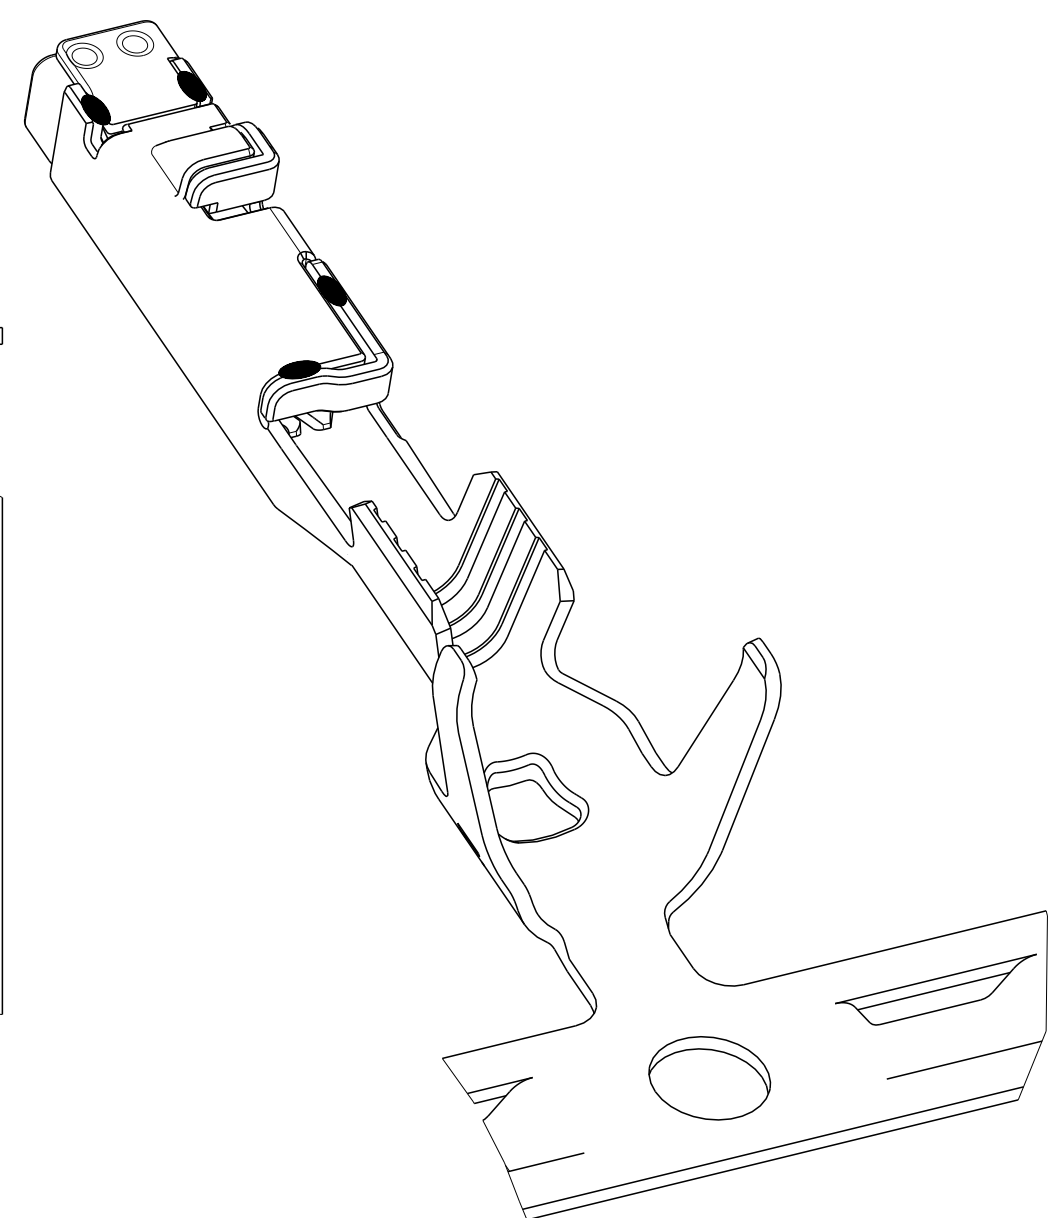

WIRE - CRIMP Draht - Crimp	STANDARD INSULATION CRIMP Standard Isolations- Crimp	SINGLE WIRE CRIMP Einzeldrahtungs- Crimp
Diagram showing the cross-section (B-B) of a wire crimp. Dimensions include $A \pm 0.3$, $B \pm 0.3$, and a 20° angle. The wire diameter is indicated as $\varnothing_{\text{Wire}} \pm 0.3$.	Diagram showing the cross-section (C-C) of a standard insulation crimp. Dimensions include $C \pm 0.3$, $E \pm 0.3$, and a 20° angle. The wire diameter is indicated as $\varnothing_{\text{Wire}} \pm 0.3$.	Diagram showing the cross-section (C-C) of a single wire crimp. Dimensions include $C \pm 0.3$, $E \pm 0.3$, and a 20° angle. The wire diameter is indicated as $\varnothing_{\text{Wire}} \pm 0.3$.

SINGLE WIRE SEAL/ Einzelzählung	1418841-3	-	CuSn0.15	CuNi3Si	TIN PLATED verzinkt	SILVER PLATED versilbert	0.14-	26	0.14	1.05	1.55	1.55	0.65	4.25	4.3	2.6	
	1418841-2					GOLD PLATED vergoldet		-	-	0.22							1.2
	1418841-1					TIN PLATED verzinkt		-	-	0.22							1.2
	1418844-3	C	CuSn0.15	CuNi3Si	TIN PLATED verzinkt	SILVER PLATED versilbert	0.25-	24	-	1.1-	1.85	1.85	0.8	4.25	4.3	2.6	
	1418844-2	C				GOLD PLATED vergoldet		-	-	0.35							1.75
	1418844-1	C				TIN PLATED verzinkt		-	-	0.35							1.75
	1670146-3	A	CuSn0.15	CuNi3Si	TIN PLATED verzinkt	SILVER PLATED versilbert	0.5-	20	0.5	1.4-	2.1	2.1	1.1	4.25	4.3	2.7	
	1670146-2	A				GOLD PLATED vergoldet		-	-	0.75							1.9
	1670146-1	A				TIN PLATED verzinkt		-	-	0.75							1.9
	1418847-3	D	CuSn0.15	CuNi3Si	TIN PLATED verzinkt	SILVER PLATED versilbert	0.5-	20	0.5	1.4-	2.3	2.5	1.1	4.25	4.3	2.7	
	1418847-2	D				GOLD PLATED vergoldet		-	-	0.75							1.9
	1418847-1	D				TIN PLATED verzinkt		-	-	0.75							1.9
1418850-3	B	CuSn0.15	CuNi3Si	TIN PLATED verzinkt	SILVER PLATED versilbert	1.0-	18	-	1.9-	2.6	2.95	1.3	4.45	4.3	2.9		
1418850-2	B				GOLD PLATED vergoldet		-	-	1.5							2.4	
1418850-1	B				TIN PLATED verzinkt		-	-	1.5							2.4	
STANDARD CRIMP	1452500-3	-	CuSn0.15	CuNi3Si	TIN PLATED verzinkt	SILVER PLATED versilbert	0.14-	26	0.14	1.05	1.55	1.55	0.65	2.1	2.1	1.1	
	1452500-2	-				GOLD PLATED vergoldet		-	-	0.22							1.2
	1452500-1	-				TIN PLATED verzinkt		-	-	0.22							1.2
	1534594-3	E	CuSn0.15	CuNi3Si	TIN PLATED verzinkt	SILVER PLATED versilbert	0.25-	24	-	1.1-	1.85	1.85	0.8	2.65	2.65	1.4	
	1534594-2	E				GOLD PLATED vergoldet		-	-	0.35							1.75
	1534594-1	E				TIN PLATED verzinkt		-	-	0.35							1.75
	1670144-3	A	CuSn0.15	CuNi3Si	TIN PLATED verzinkt	SILVER PLATED versilbert	0.5-	20	0.5	1.4-	2.1	2.1	1.1	2.8	2.9	1.6	
	1670144-2	A				GOLD PLATED vergoldet		-	-	0.75							1.9
	1670144-1	A				TIN PLATED verzinkt		-	-	0.75							1.9
	1394897-3	E	CuSn0.15	CuNi3Si	TIN PLATED verzinkt	SILVER PLATED versilbert	0.5-	20	0.5	1.4-	2.3	2.5	1.1	3	3.2	1.75	
	1394897-2	E				GOLD PLATED vergoldet		-	-	0.75							1.9
	1394897-1	E				TIN PLATED verzinkt		-	-	0.75							1.9
1452503-3	C	CuSn0.15	CuNi3Si	TIN PLATED verzinkt	SILVER PLATED versilbert	1.0-	18	-	1.9-	2.6	2.95	1.3	3.75	3.95	2.1		
1452503-2	C				GOLD PLATED vergoldet		-	-	1.5							2.4	
1452503-1	C				TIN PLATED verzinkt		-	-	1.5							2.4	

AS PRODUCTS ON CARRIERSTRIP w/ie Bandwae	2.6	2	6.4	0.8	16	967067-2	963142-2	963143-1 (Ø3,95) / 967056-1 (Ø3,55)	1528151	4-1579001-8
	2.6	2	6.4	0.8	16	967067-2	963142-2		1528152	3-1579001-9
	2.6	2	6.4	0.8	16	967067-1	963142-1		1528674	5-1579021-7
	2.6	2	6.4	0.8	16	967067-1	963142-2		1528153	1-1579001-8
	3	2	6.8	0.8	16.5	967067-1	967067-1		1528154	3-1579001-7
	2.6	2	5.7	0	15	-			1528146	3-1579001-6
	2.6	2	5.7	0.2	15	-	-		1528147	0-1579001-6
	3	2	6.1	0.2	16	-	-		1528673	5-1579021-6
	3	2	6.1	0.2	16	-			1528148	0-1579001-5
	3	2	6.1	0.2	16	-	-		1528150	1-1579001-3

8 Unterschiedliche Ausführung der Rillen möglich

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG G. Hotea 17AUG2001 CHK H. Herth 11MAR2002 APVD H. Wendling 12MAR2002		 TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±0.2 1 PLC ±0.2 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±°		NAME MCON 1.2 CB (CLEAN BODY)	
		PRODUCT SPEC 108-18782 APPLICATION SPEC 114-18464		SIZE A 1	
MATERIAL -		FINISH -		CAGE CODE 00779	
WEIGHT 0.18 g		DRAWING NO G-1534326		RESTRICTED TO -	
Customer Drawing		SCALE 10:1		SHEET 1 of 1 REV G5	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1418850-3](#) [1418850-3 \(Mouser Reel\)](#) [1418850-3 \(Cut Strip\)](#) [1418850-3 \(Loose Piece\)](#)