




D

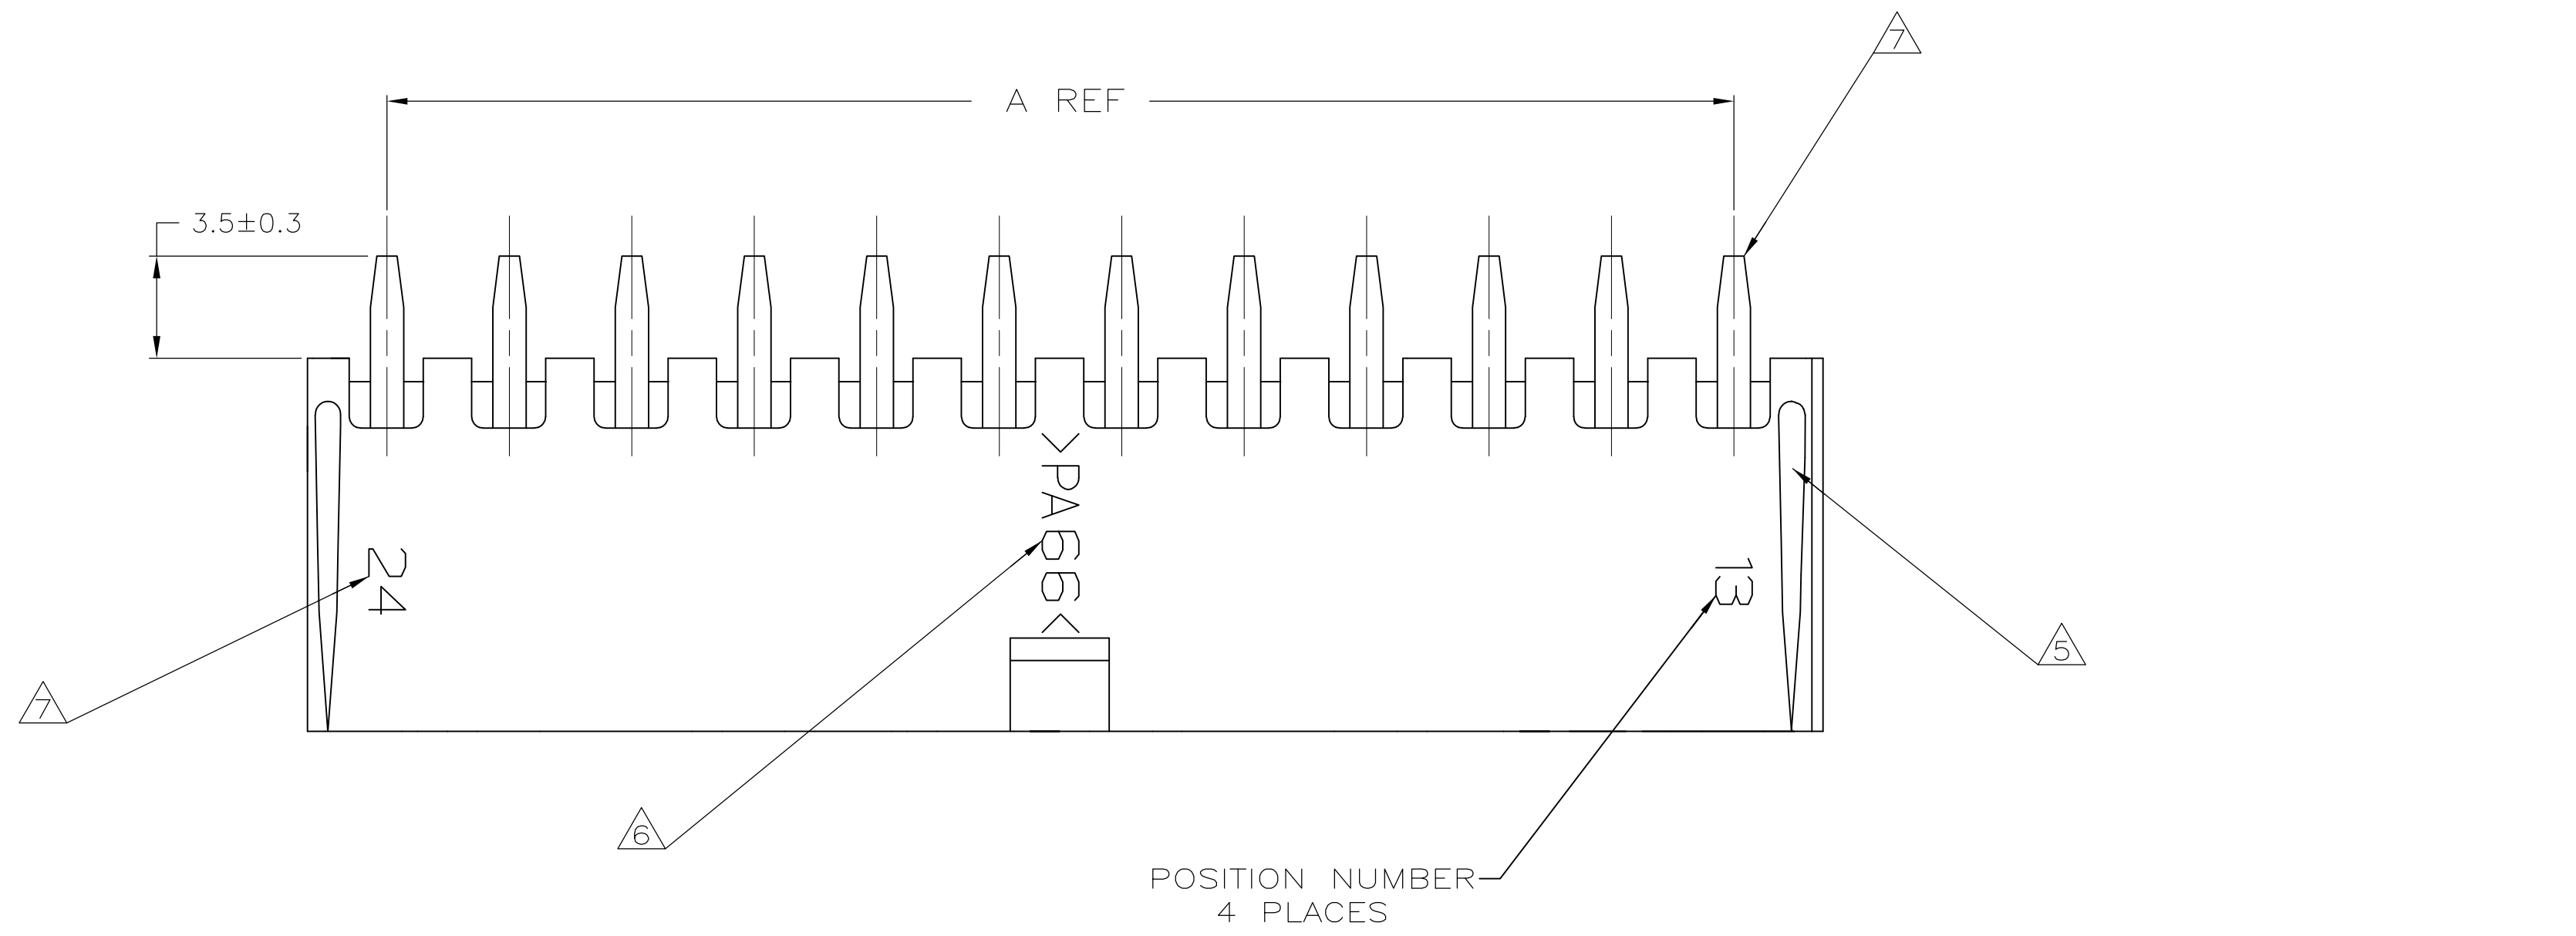

C

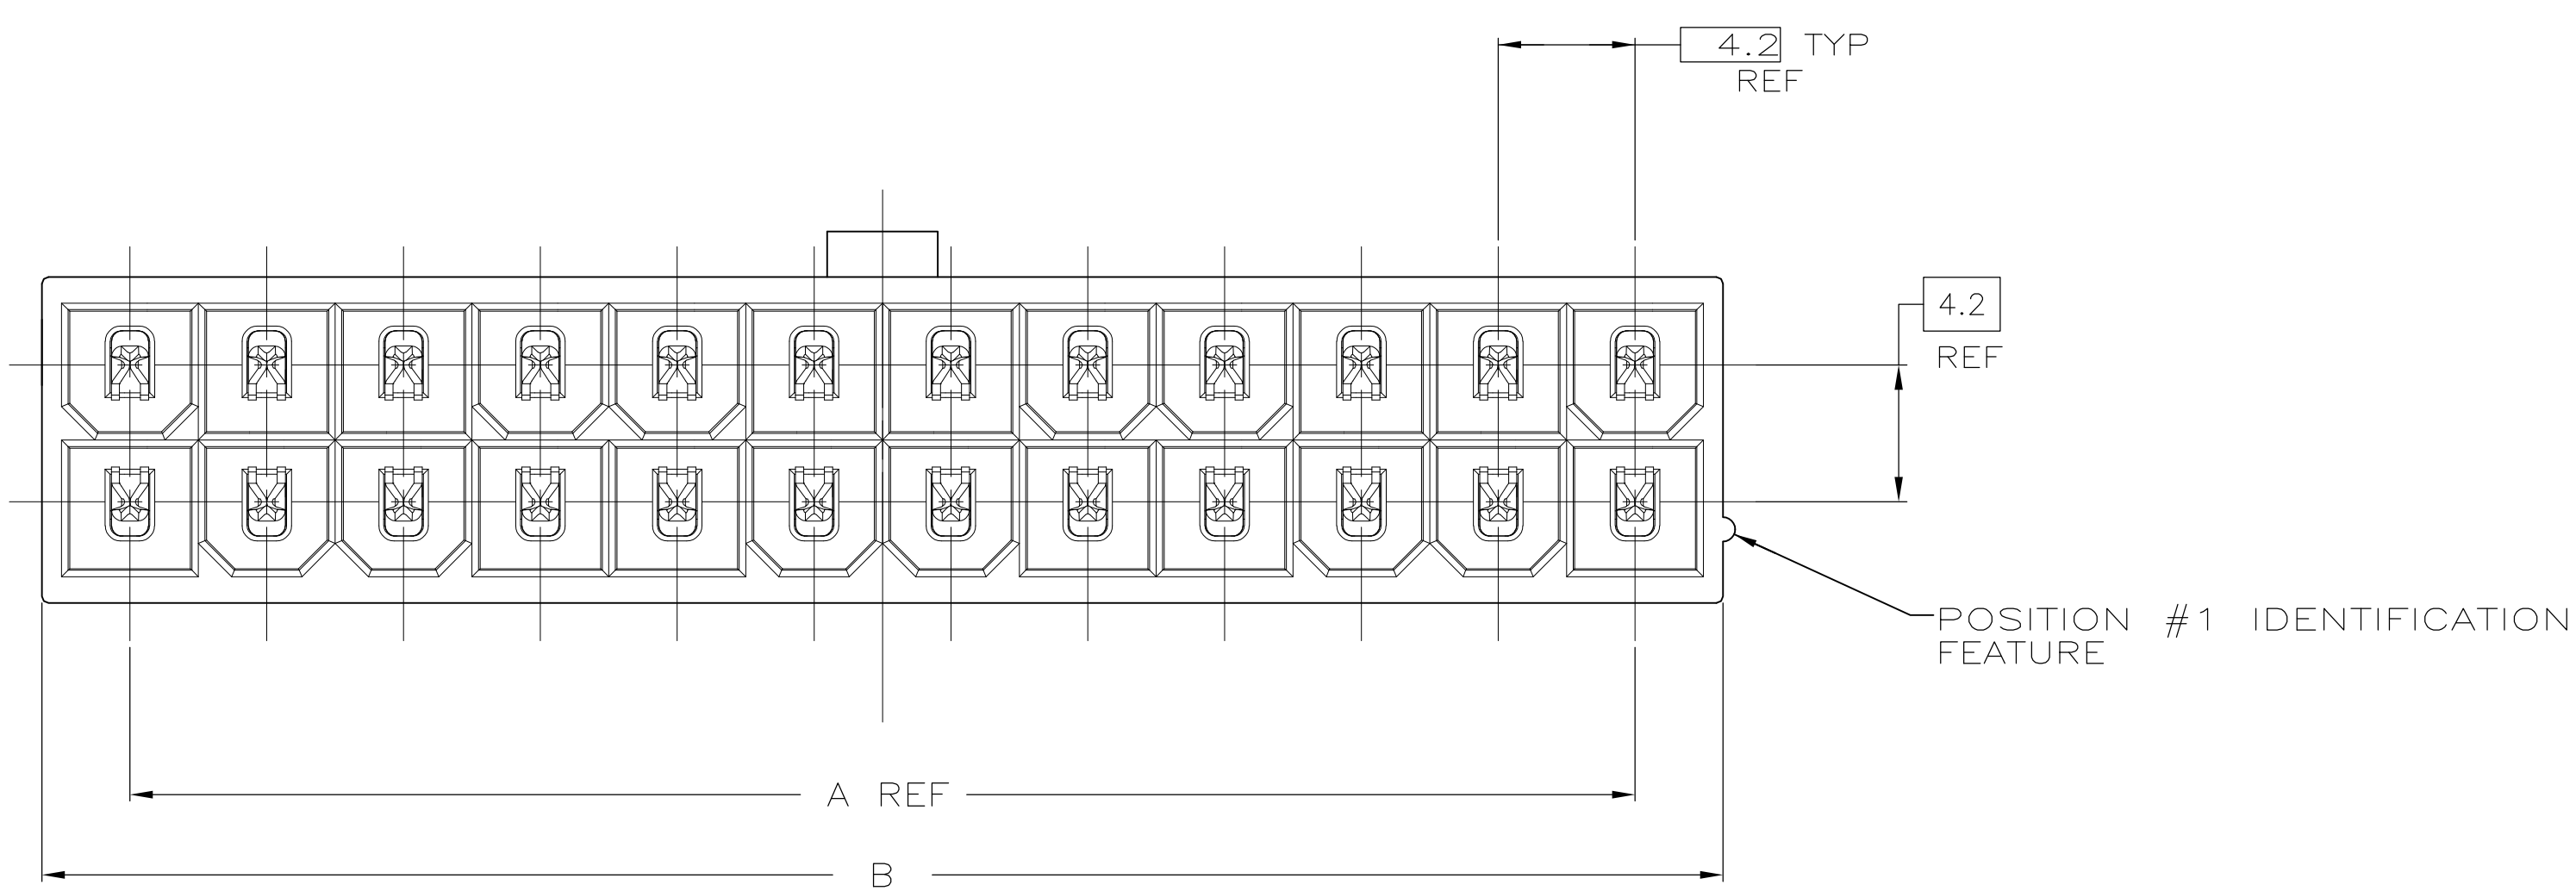


B

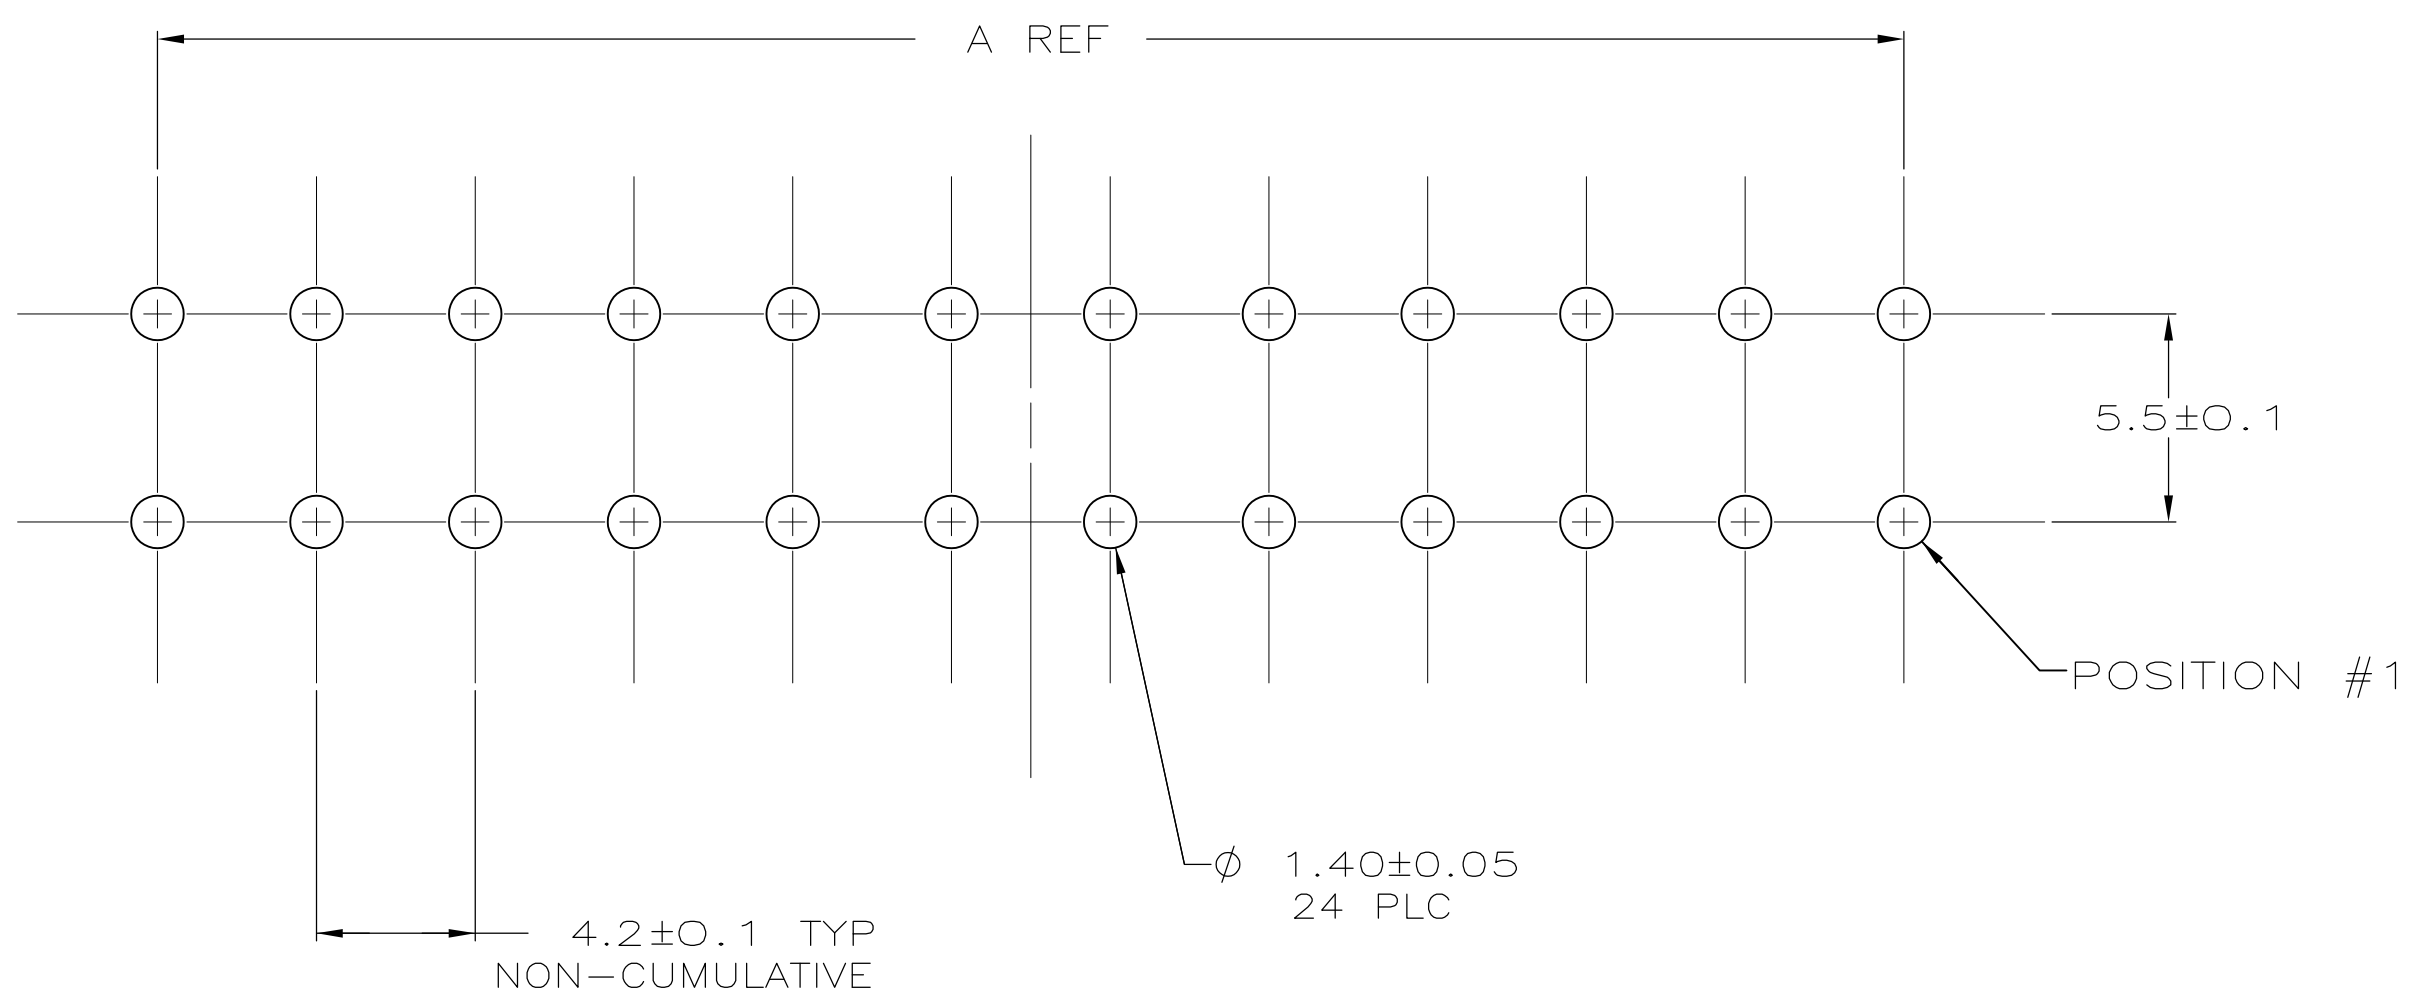


A

RECOMMENDED MOUNTING HOLE PATTERN FOR 1.78 MAX THICK P.C. BOARD COMPONENT SIDE SHOWN

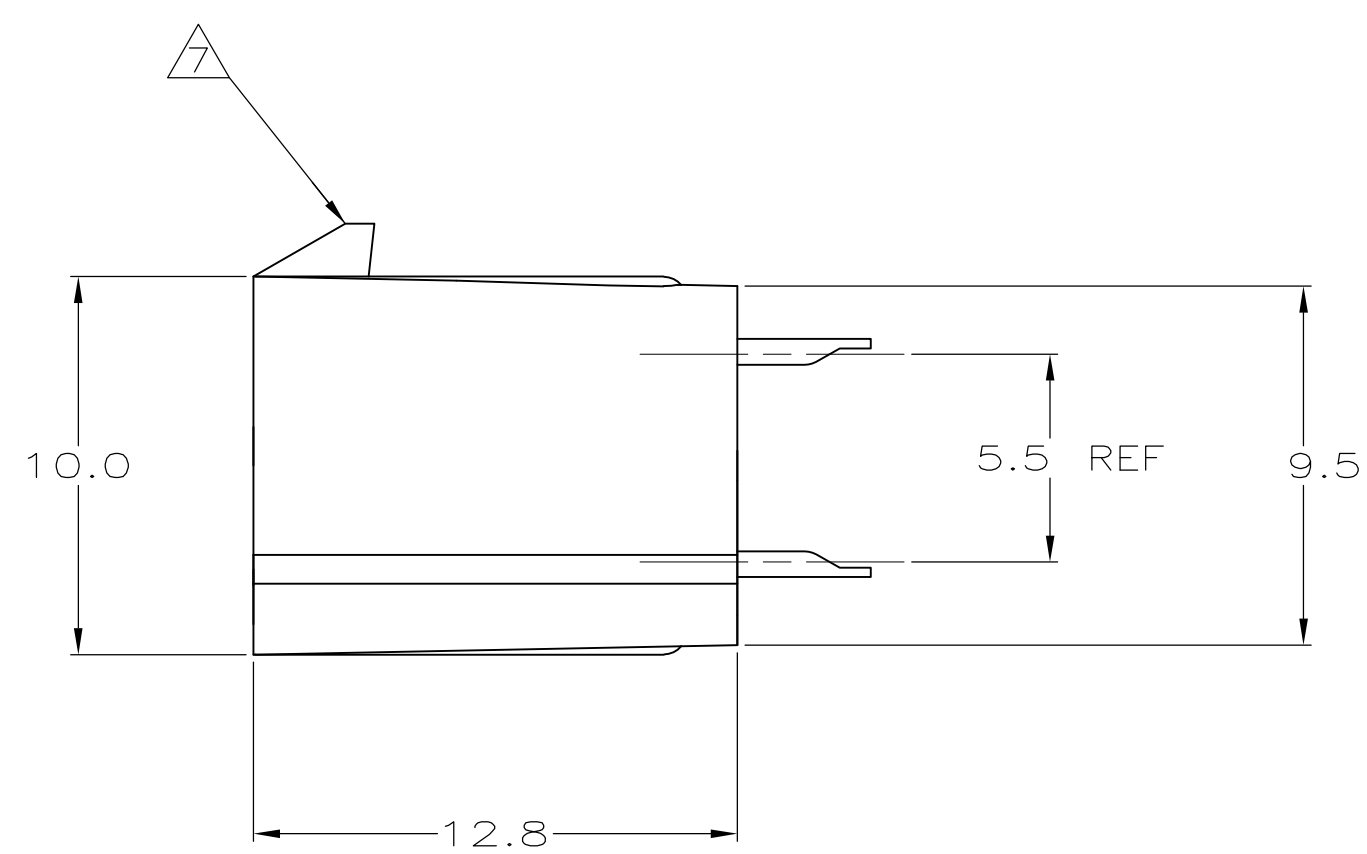

51.6	46.2	24	2-1586491-4
47.4	42.0	22	2-1586491-2
43.2	37.8	20	2-1586491-0
39.0	33.6	18	1-1586491-8
34.8	29.4	16	1-1586491-6
30.6	25.2	14	1-1586491-4
26.4	21.0	12	1-1586491-2
22.2	16.8	10	1-1586491-0
18.0	12.6	8	1586491-8
13.8	8.4	6	1586491-6
9.6	4.2	4	1586491-4
5.4	0.0	2	1586491-2
B	A	NO. OF POSITIONS	PART NO

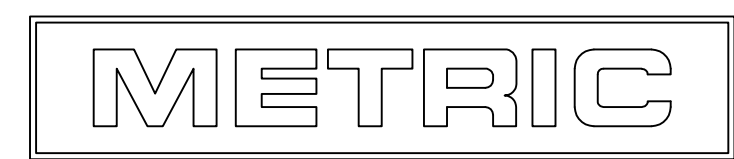

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER	20JUNE2005	TE Connectivity	
DIMENSIONS: mm		CHK D. COLEY	20JUNE2005	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D. COLEY	20JUNE2005	PRODUCT SPEC	
0. PLC ± -		APPLICATION SPEC		108-1699	
1. PLC ± 0.2		SIZE		A1	
2. PLC ± 0.13		CAGE CODE		00779	
3. PLC ± -		DRAWING NO		1586491	
4. PLC ± -		WEIGHT		-	
ANGLES ± 0°30'		CUSTOMER DRAWING		SCALE 5:1 SHEET 1 OF 1 REV P	
FINISH		RESTRICTED TO		-	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-1586491-6](#)