

## System connectors - FLKM 14-PA-S300 - 2299770

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



VARIOFACE front adapter, for SIMATIC S 7-300, 2 x 8 channels can be connected.



### Key Commercial Data

Packing unit	1 pc
Weight per Piece (excluding packing)	51.2 g
Custom tariff number	85369010
Country of origin	Germany

### Technical data

#### Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

#### General

Note	Analog I/O cards To avoid short-circuits, all wire bridges must be disconnected! No voltage supply may be supplied to the front adapter!
	Digital I/O cards Thanks to the existing wire bridge upon delivery, the input and output bytes are non-isolated.
Nominal voltage $U_N$	< 50 V AC
	60 V DC
Max. permissible current	1 A (per path)
	8 A (per connection, supply via separate power supply (2.8 x 0.8 mm))
Max. permissible total current	2 A (per Byte, for supply via connector)
	8 A (during supply via a separate bridged power supply)
Mounting position	any
Degree of protection	IP00

# System connectors - FLKM 14-PA-S300 - 2299770

## Technical data

### General

Standards/regulations	IEC 60664
	DIN EN 50178
	IEC 62103
Rated insulation voltage	63 V
Rated surge voltage	0.6 kV (Functional insulation)
Degree of pollution	2
Overvoltage category	II

### Connection data 1

Connection name	Controller level
Channels which can be connected	16

### Connection data 2

Connection name	Field level
Connection method	IDC/FLK pin strip (2.54 mm)
Number of connections	2
Number of positions	14

### Supported controller

Controller	SIEMENS S7-300 / ET 200 M
- suitable I/O card	6ES7 321-1BH50-0AA0
	6ES7 321-7BH01-0AB0
	6ES7 321-1BH02-0AA0
	6ES7 321-1BH10-0AA0
	6ES7 322-1BH01-0AA0
	6ES7 322-1BH10-0AA0
	6ES7 322-8BF00-0AB0
	6ES7 323-1BH01-0AA0
	6ES7 331-7HF01-0AB0
	6ES7 331-7KF02-0AB0
	6ES7 331-7KB02-0AB0
	6ES7 331-7TF01-0AB0
	6ES7 332-5HD01-0AB0
	6ES7 332-5HB01-0AB0
	6ES7 332-7ND02-0AB0
	6ES7 332-8TF01-0AB0
	6ES7 334-0CE01-0AA0
	6ES7 334-0KE00-0AB0
	6ES7 335-7HG01-0AB0

## System connectors - FLKM 14-PA-S300 - 2299770

### Technical data

#### Supported controller

	6ES7 338-4BC01-0AB0
	6ES7 350-1AH03-0AE0
	6ES7 351-1AH01-0AE0
	6ES7 352-1AH02-0AE0
	6ES7 353-1AH01-0AE0
	6ES7 354-1AH01-0AE0
	6ES7 355-0VH10-0AE0
	6ES7 355-1VH10-0AE0

#### Standards and Regulations

Connection in acc. with standard	CUL
Standards/regulations	IEC 60664
	DIN EN 50178
	IEC 62103
Degree of pollution	2
Overvoltage category	II

### Classifications

#### eCl@ss

eCl@ss 4.0	27250313
eCl@ss 4.1	27250313
eCl@ss 5.0	27250313
eCl@ss 5.1	27250313
eCl@ss 6.0	27242208
eCl@ss 7.0	27242208
eCl@ss 8.0	27249290
eCl@ss 9.0	27240692

#### ETIM

ETIM 2.0	EC001423
ETIM 3.0	EC001423
ETIM 4.0	EC001423
ETIM 5.0	EC002584

#### UNSPSC

UNSPSC 6.01	30211824
UNSPSC 7.0901	39121421

# System connectors - FLKM 14-PA-S300 - 2299770

## Classifications

### UNSPSC

UNSPSC 11	39121421
UNSPSC 12.01	39121421
UNSPSC 13.2	39121421

## Approvals

### Approvals

---

#### Approvals

UL Recognized / cUL Recognized / EAC / cULus Recognized

---

#### Ex Approvals


---

#### Approvals submitted

---

## Approval details

UL Recognized 

cUL Recognized 


EAC

cULus Recognized 

## Drawings

# System connectors - FLKM 14-PA-S300 - 2299770

Circuit diagram

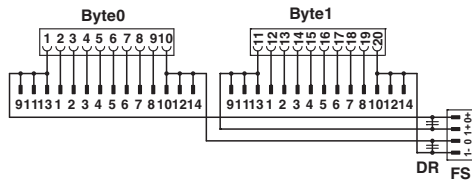

Connection scheme FLKM 14-PA-S300

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phoenix Contact:](#)

[2299770](#)