
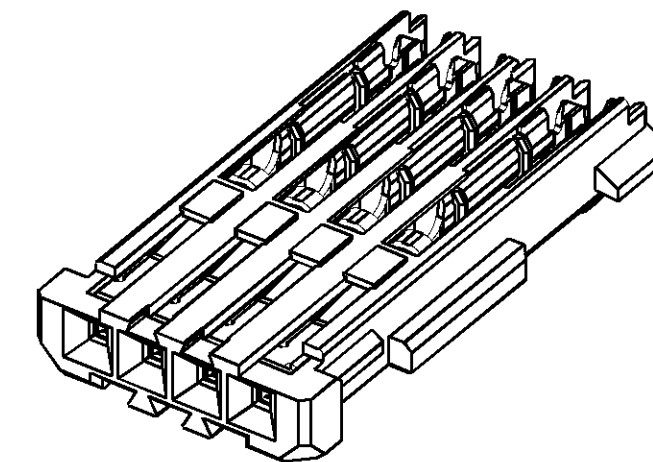
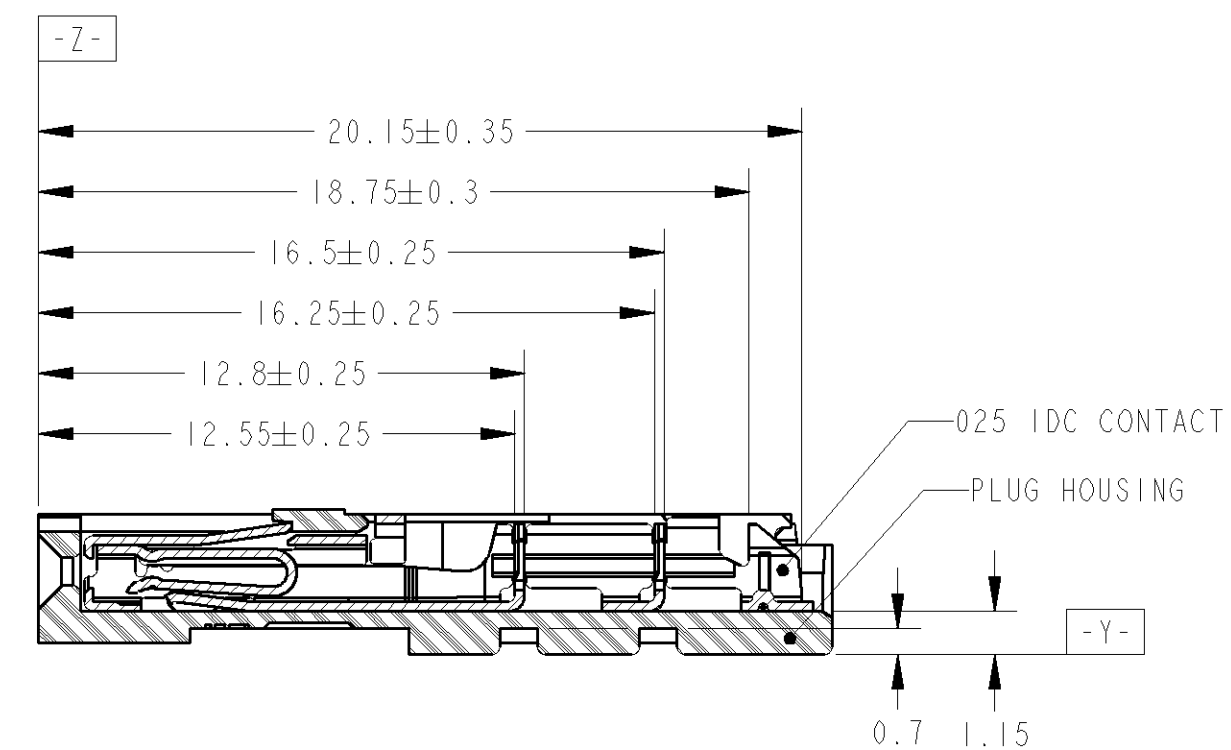
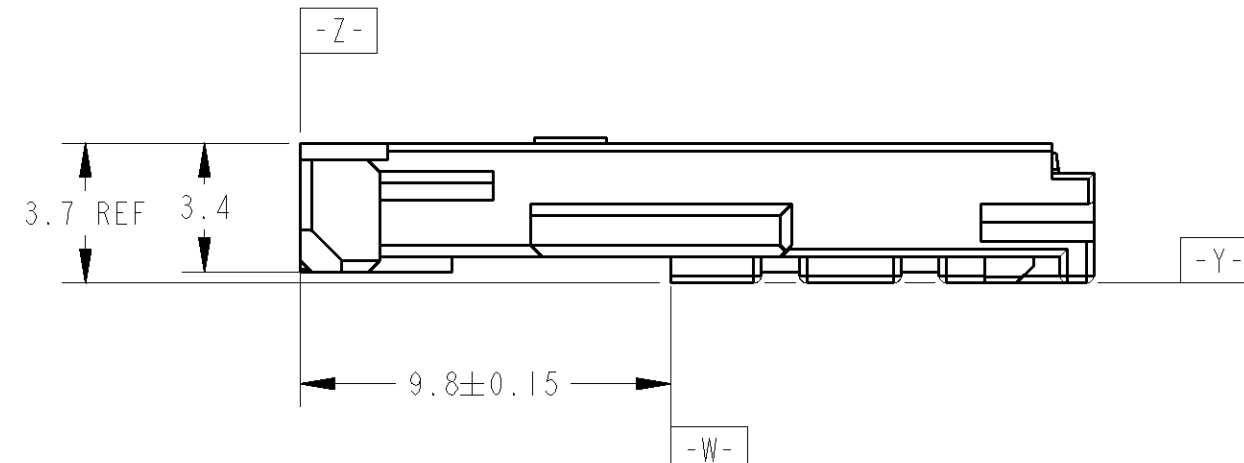
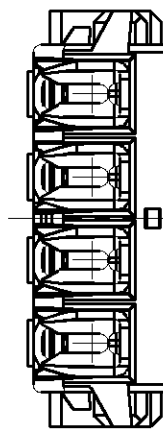
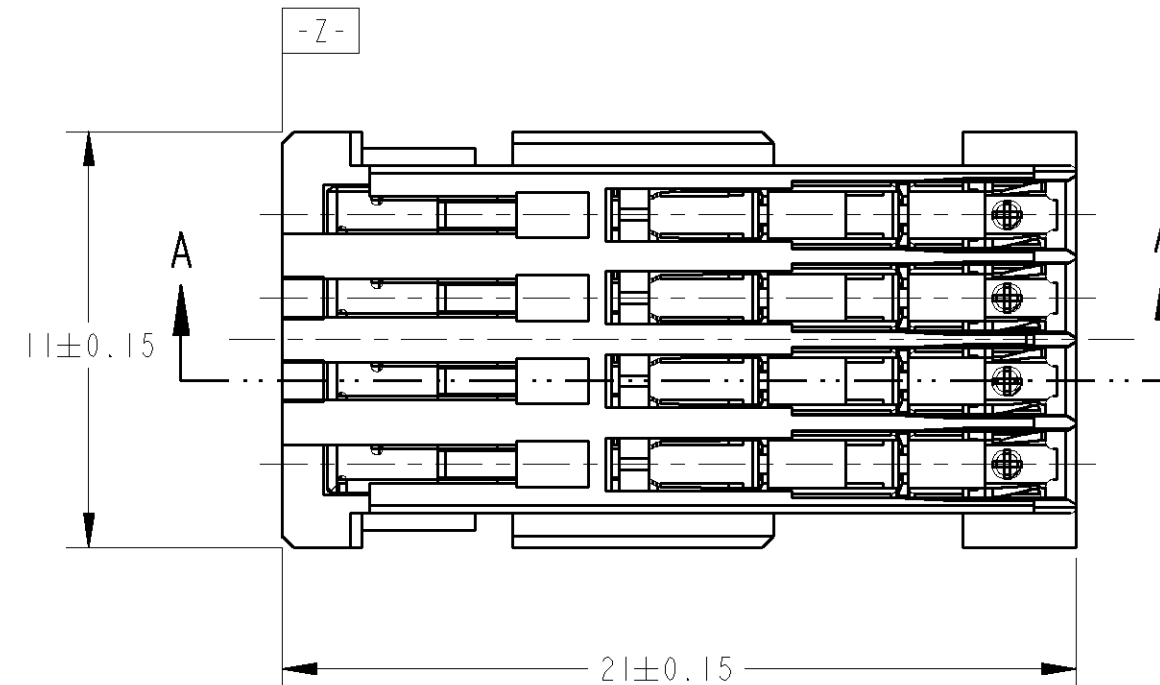


LOC	DIST	REVISONS 変更						
J	-	P	LTR	DESCRIPTION	ECN	DATE	DWN	APVD
			O	RELEASED	FJA0-0457-03	25AUG03	TS	KB
			A	REVISED	ECR-06-011679	12MAY06	KF	HY
			A I	REVISED	ECR-12-000570	11JAN12	TS	KB

- 1 : AS SHOWN

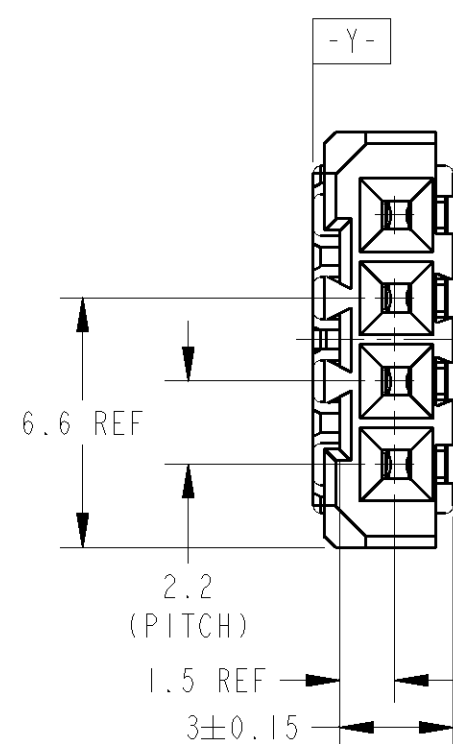

SCALE 4:1


$$A - A$$


1. 取扱説明書: 411-5912
2. 本品はロックハウジング型番 | 47380 | を装着して使用する。
3. 嵌合相手型番: | 473790

△4, 回路番号: F I G. | 参照


1. INSTRUCTION SHEET:411-5912
2. PLUG HOUSING MUST BE USED WITH LOCK HOUSING  
PN 1473801
3. PART NUMBER OF HOUSING TO BE MATED:1473790

△.CIRCUIT NUMBER;SEE FIG.1


I	NATURAL 自然色	1717248-3
3-4	NATURAL 自然色	1717248-2
—//—	NATURAL 自然色	1717248-1
NO TERMINAL CIRCUIT NO 欠番 (欠)	COLOR 色	PART NUMBER 型番

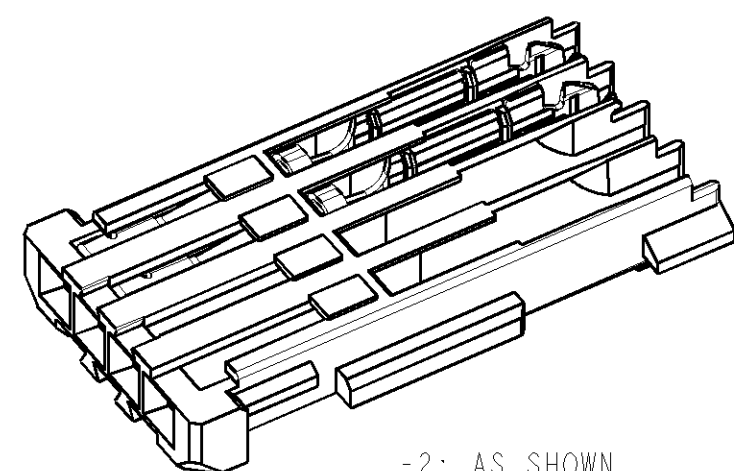





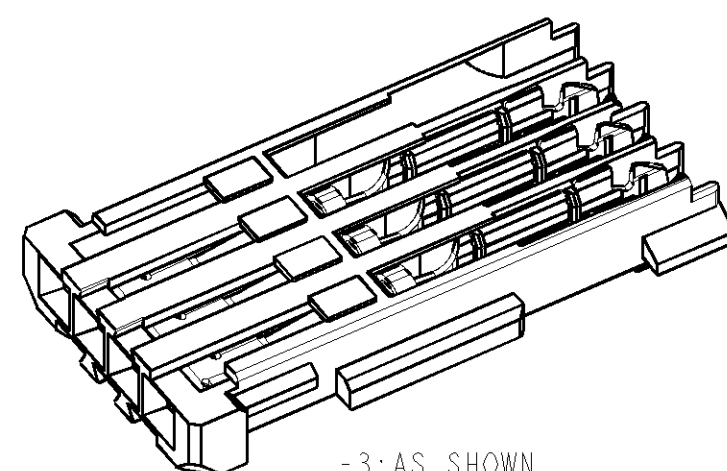

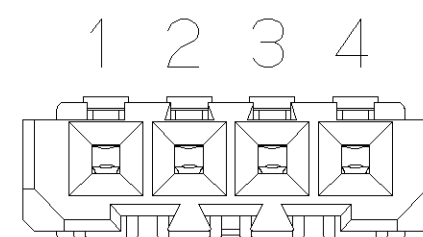

-2: AS SHOWN  
SCALE 4:1



-3: AS SHOWN  
SCALE 4:1



△ FIG. 1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN T. SHINOHARA		21MAY03		 TE Connectivity													
DIMENSIONS: 単位: 概 mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差: ±0.3		S. AMEMIYA		21MAY03		NAME 名義		4 POSITION PLUG ASSEMBLY 025 IDC CONNECTOR		SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO	
		1-PLC ± 2-PLC ±0.1 3-PLC ±0.01 4-PLC ±0.001		APVD H. YAMAGAMI		PRODUCT SPEC 製品規格 108-5660		APPLICATION SPEC 取付適用規格 114-5276		A2		C		1717248		SCALE 5:1		SHEET OF	
MATERIAL 材料 HSG:PBT CONT:Cu Alloy		FINISH 仕上 HSG:SEE TABLE CONT:POST TIN		WEIGHT 1.34		CUSTOMER DRAWING		REV A											

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1717248-2](#)