
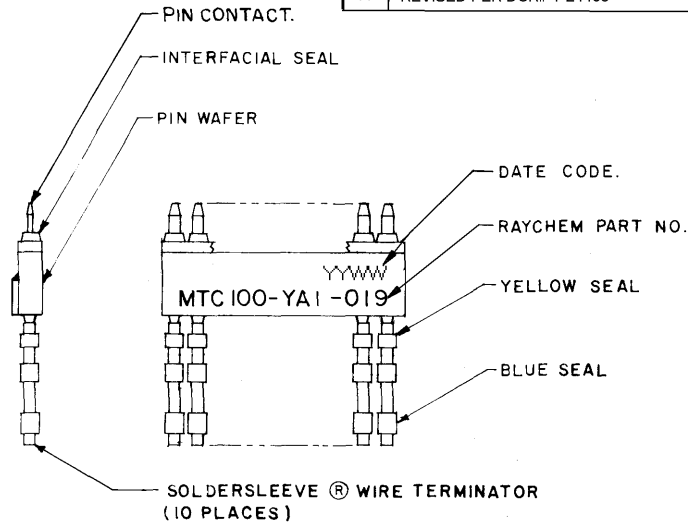


REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED
2	REVISED PER ECN#T-5868	4/1-3-86	JB
A	REVISED PER DCR# T-24468	3/23/2000	M.HIGGY

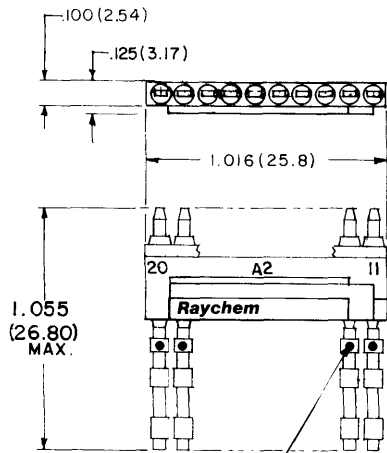

RED COLOR CODE

3. THIS PRODUCT IS DESIGNED TO MEET THE REQUIREMENTS OF RAYCHEM SPECIFICATION D-6012. QUALIFICATION IS PENDING.

2. FINISH :
- C. CONTACT TAIL; SOLDER COATED PER QQ-S-571.
  - B. PIN CONTACT ENGAGING AREA; GOLD PLATE PER MIL-G-45204, CLASS I.
  - A. PIN WAFER; FINISH TO BE AS MOLDED.
  - D. INTERFACIAL SEAL; SILICONE ELASTOMER PER ZZ-R-765.
  - C. SOLDERSLLEEVE® WIRE TERMINATOR; REFER TO RAYCHEM DWG. CTA-0068 FOR DATA.

1. MATERIAL : A, PIN WAFER INSERT MATERIAL HIGH GRADE POLYARYLENE THERMOPLASTIC.

NOTES :

If this document is printed it becomes uncontrolled.  
Check with the web for latest revision.

## SPECIFICATION CONTROL DRAWING

DRAWN	R.Uchtmann	10-11-84	<b>Raychem</b>		RAYCHEM CORPORATION 300 CONSTITUTION DRIVE MENLO PARK, CALIFORNIA 94025	
CHECKED	JB					
APPROVED	Blain	10-12-84	TITLE WAFER "A2" PIN, SPECIAL 1" FOR USE IN MTC 100 2" CONNECTOR, 125°C OPERATING TEMPERATURE, FOR 20-26 AWG ROUND WIRE TERMINATION, OVAL ENTRY. MTC 100 SERIES (P.A.S.S.)			
APPROVED	San	10-24-84				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. METRIC DIMENSIONS ARE IN PARENTHESIS			SIZE	CODE IDENT. NO.	DWG. NO.	
DO NOT SCALE THIS DRAWING			B	06090	MTC 100-YA1-019	A
				CAD FILE:	T24468.TIF	WEIGHT

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[632209-000](#)