


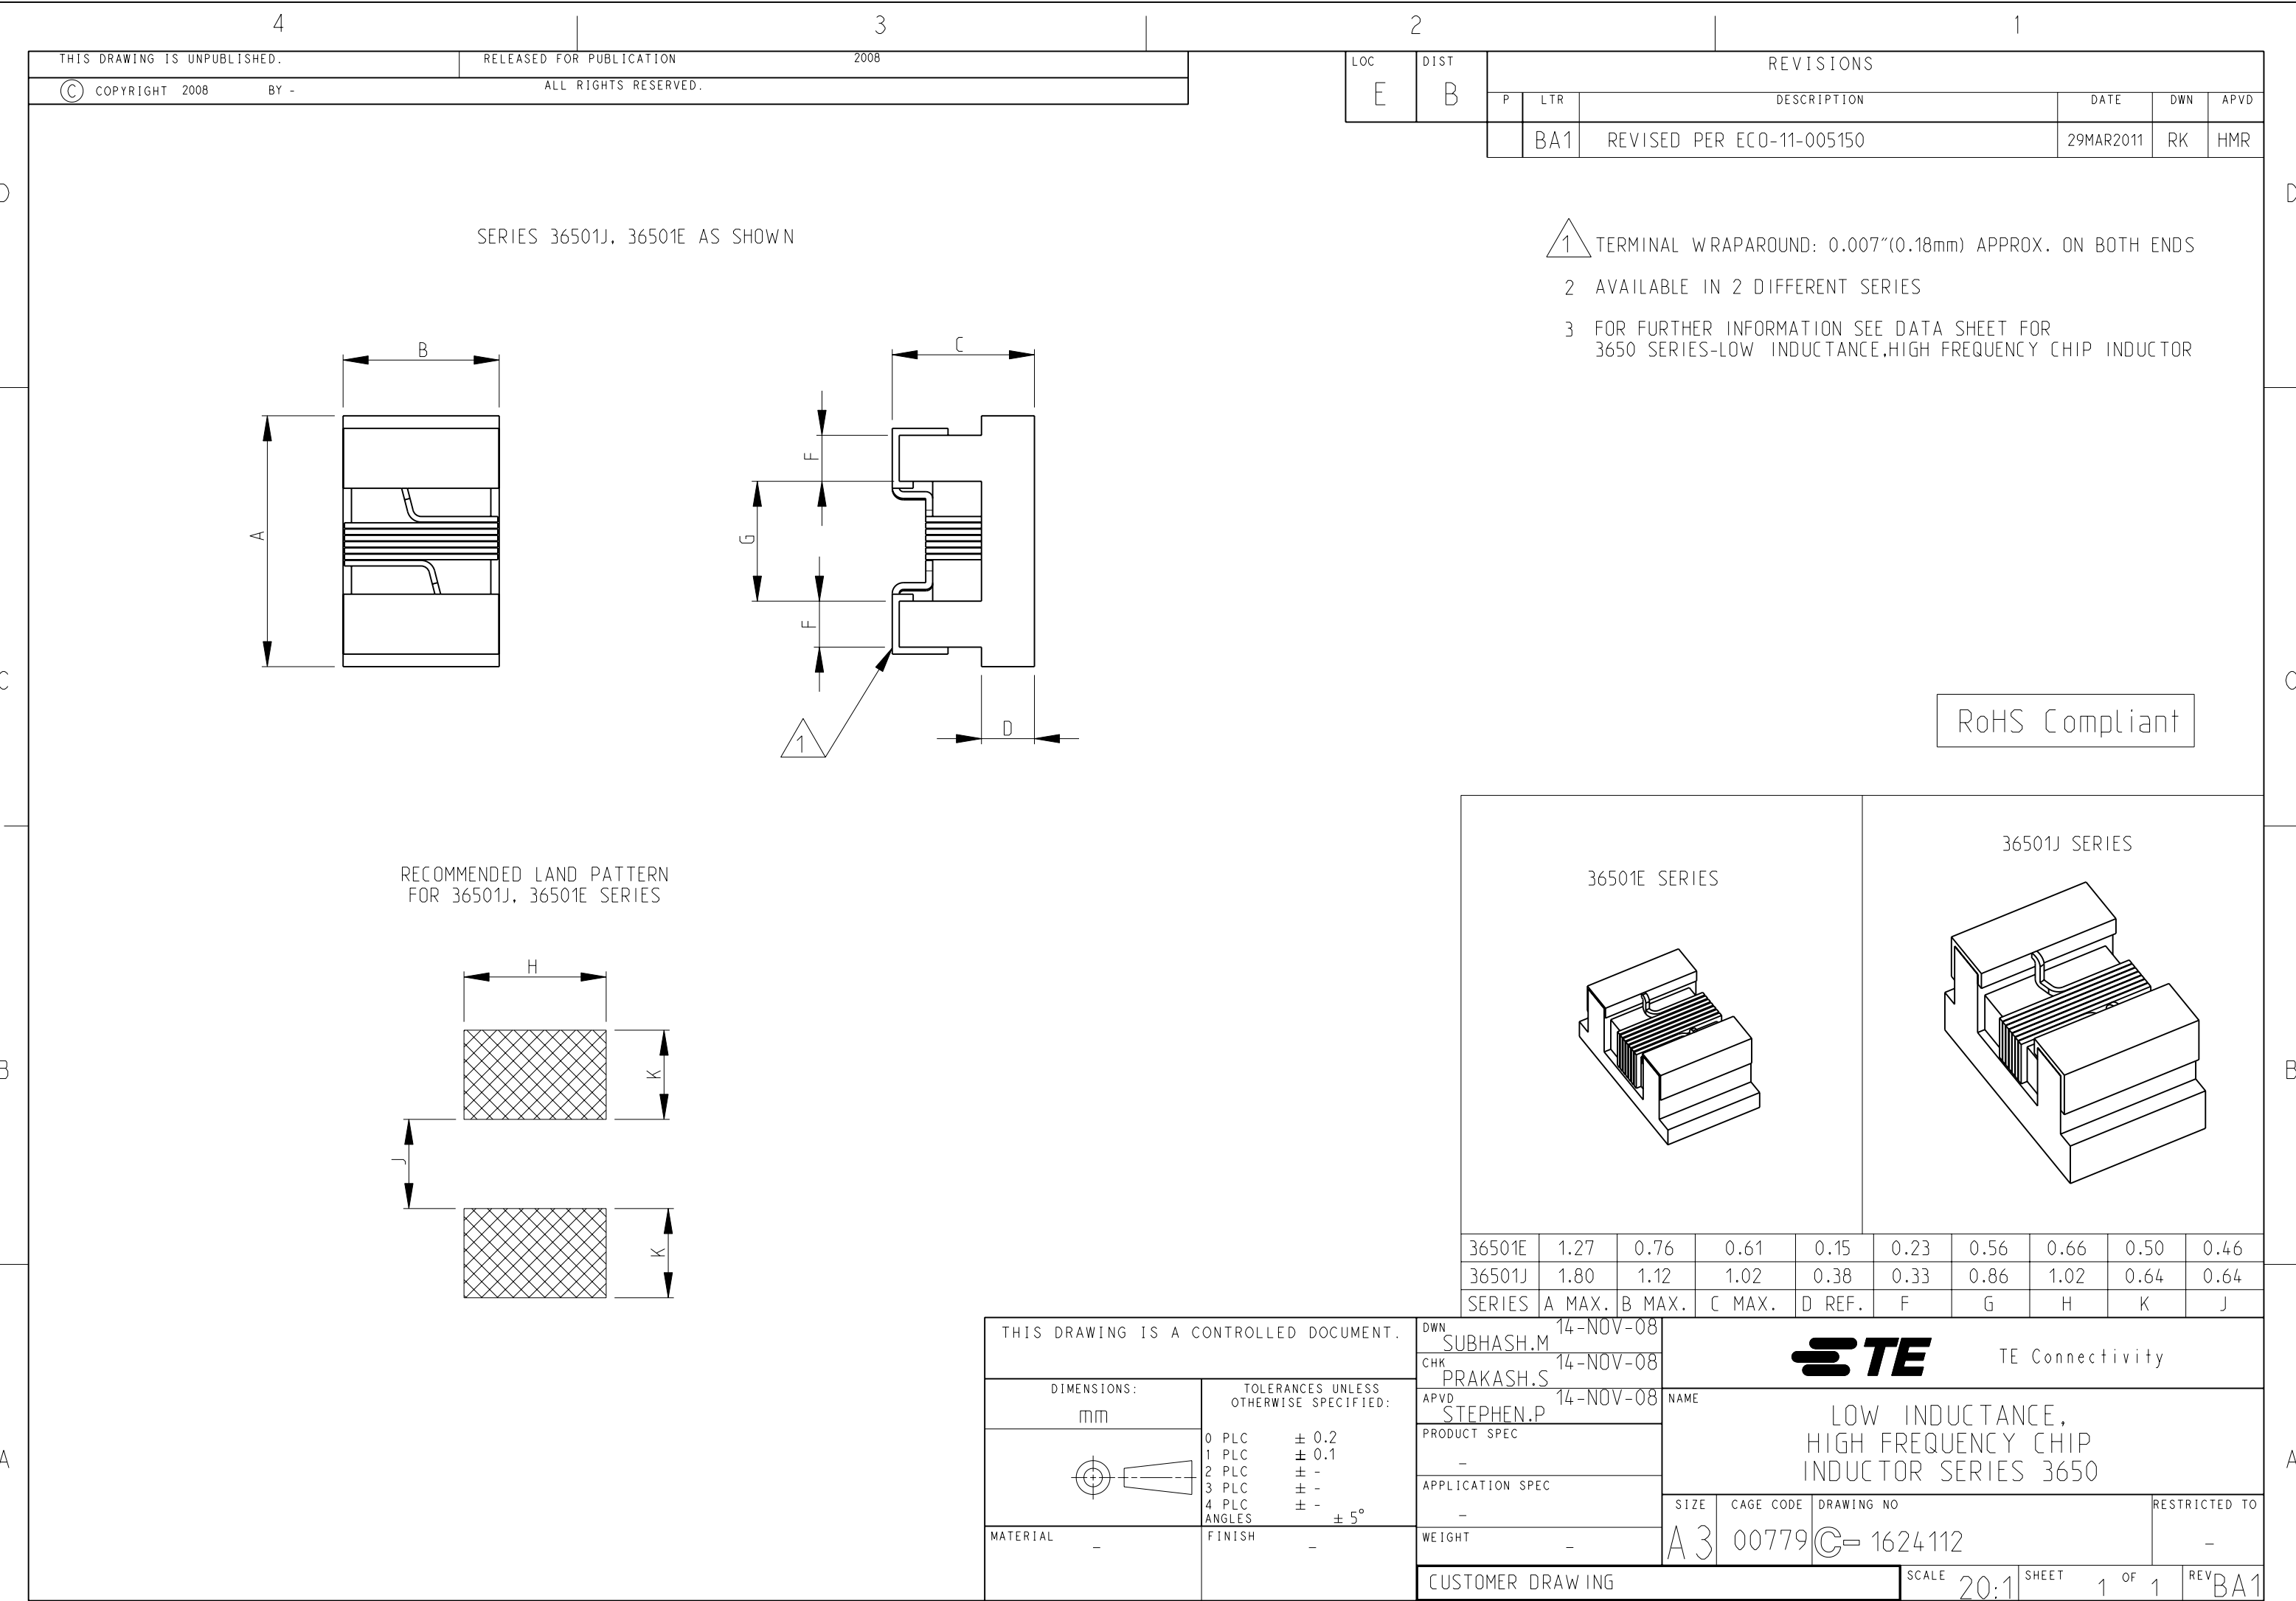

SERIES 36501J, 36501E AS SHOWN

A

B

C

D

F

G

F

D

1

1

TERMINAL WRAPAROUND: 0.007"(0.18mm) APPROX. ON BOTH ENDS

2 AVAILABLE IN 2 DIFFERENT SERIES

3 FOR FURTHER INFORMATION SEE DATA SHEET FOR 3650 SERIES-LOW INDUCTANCE,HIGH FREQUENCY CHIP INDUCTOR

RoHS Compliant

RECOMMENDED LAND PATTERN FOR 36501J, 36501E SERIES

H

K

K

36501E SERIES

36501J SERIES

36501E	1.27	0.76	0.61	0.15	0.23	0.56	0.66	0.50	0.46
36501J	1.80	1.12	1.02	0.38	0.33	0.86	1.02	0.64	0.64
SERIES	A MAX.	B MAX.	C MAX.	D REF.	F	G	H	K	J

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

0 PLC

1 PLC

2 PLC

3 PLC

4 PLC

ANGLES

± 0.2

± 0.1

± -

± -

± -

± 5°

TOLERANCES UNLESS OTHERWISE SPECIFIED:

FINISH

-

MATERIAL

-

DWN

CHK

APVD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

SUBHASH.M

14-NOV-08

PRAKASH.S

14-NOV-08

STEPHEN.P

14-NOV-08

-

-

-

-

TE Connectivity

LOW INDUCTANCE,
HIGH FREQUENCY CHIP
INDUCTOR SERIES 3650

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

1624112

-

SCALE

SHEET

OF

REV

20:1

1

1

BA1

1470-19 (3/11)

Pro/ENGINEER DRAWING

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[36501E9N0JTDG](#)