

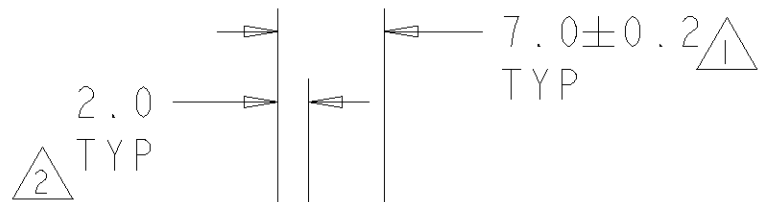
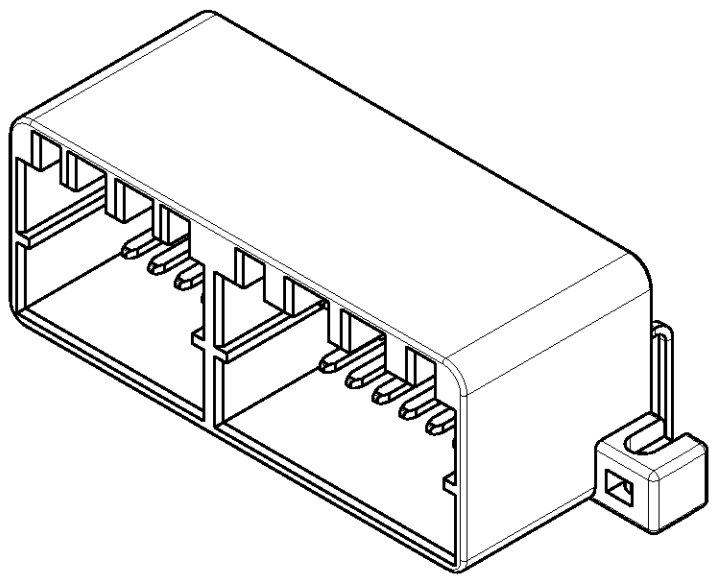



LOC	DIST	REVISIONS					
FX	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			O	RELEASED PER NPR 20054	14JUN00	PY	GM
			A	REV PER ECN 0K80-0182-00	23AUG2000	JRB	GEM
			B	REV PER ECN 0K80-0205-00	02OCT2000	JRB	GEM
			B1	REV PER ECN 0K80-0139-03	16MAY2003	DJA	SSA

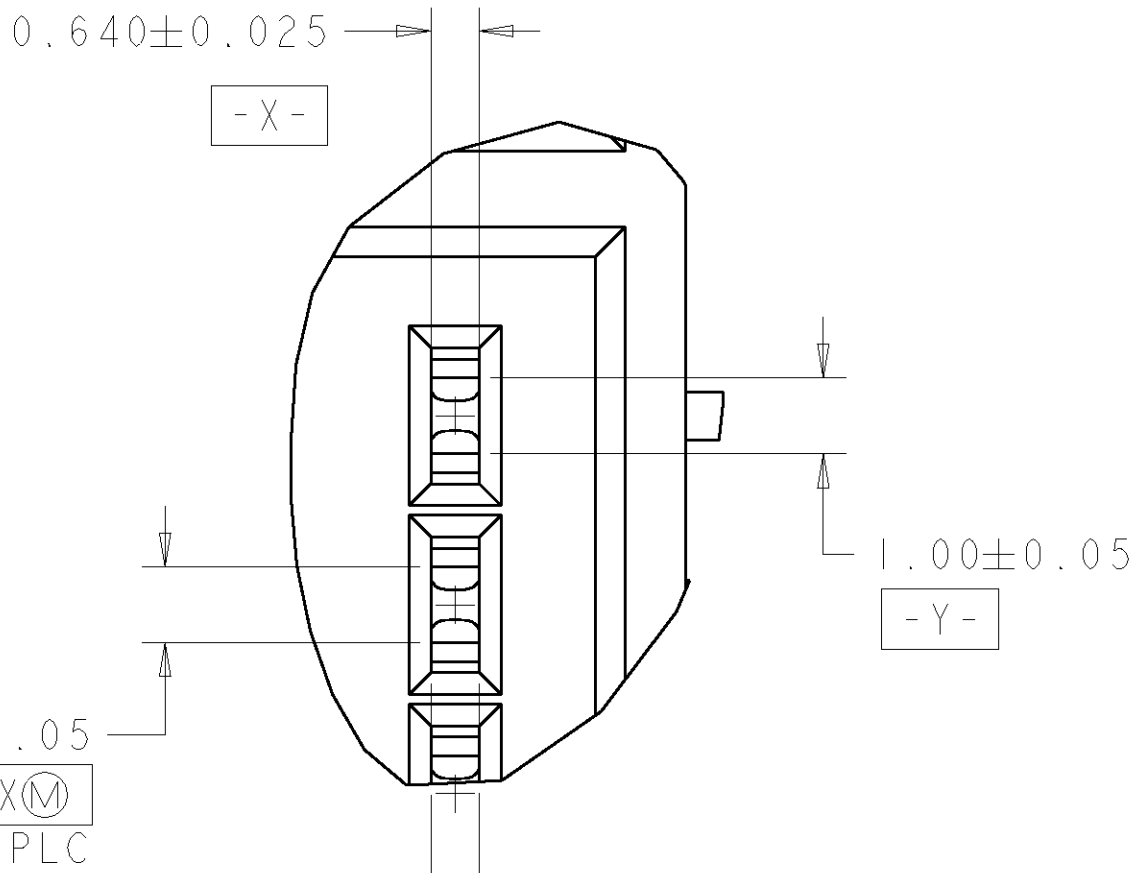


SECTION CC-CC
SCALE 2:1

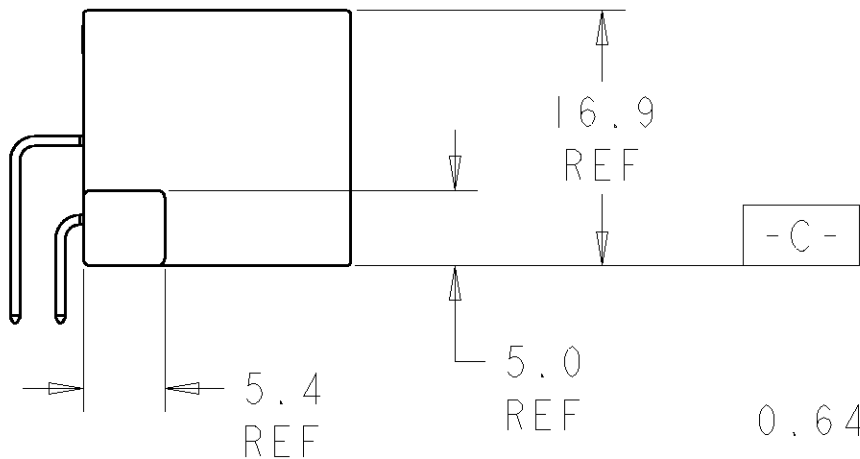


DETAIL E
SCALE 10:1

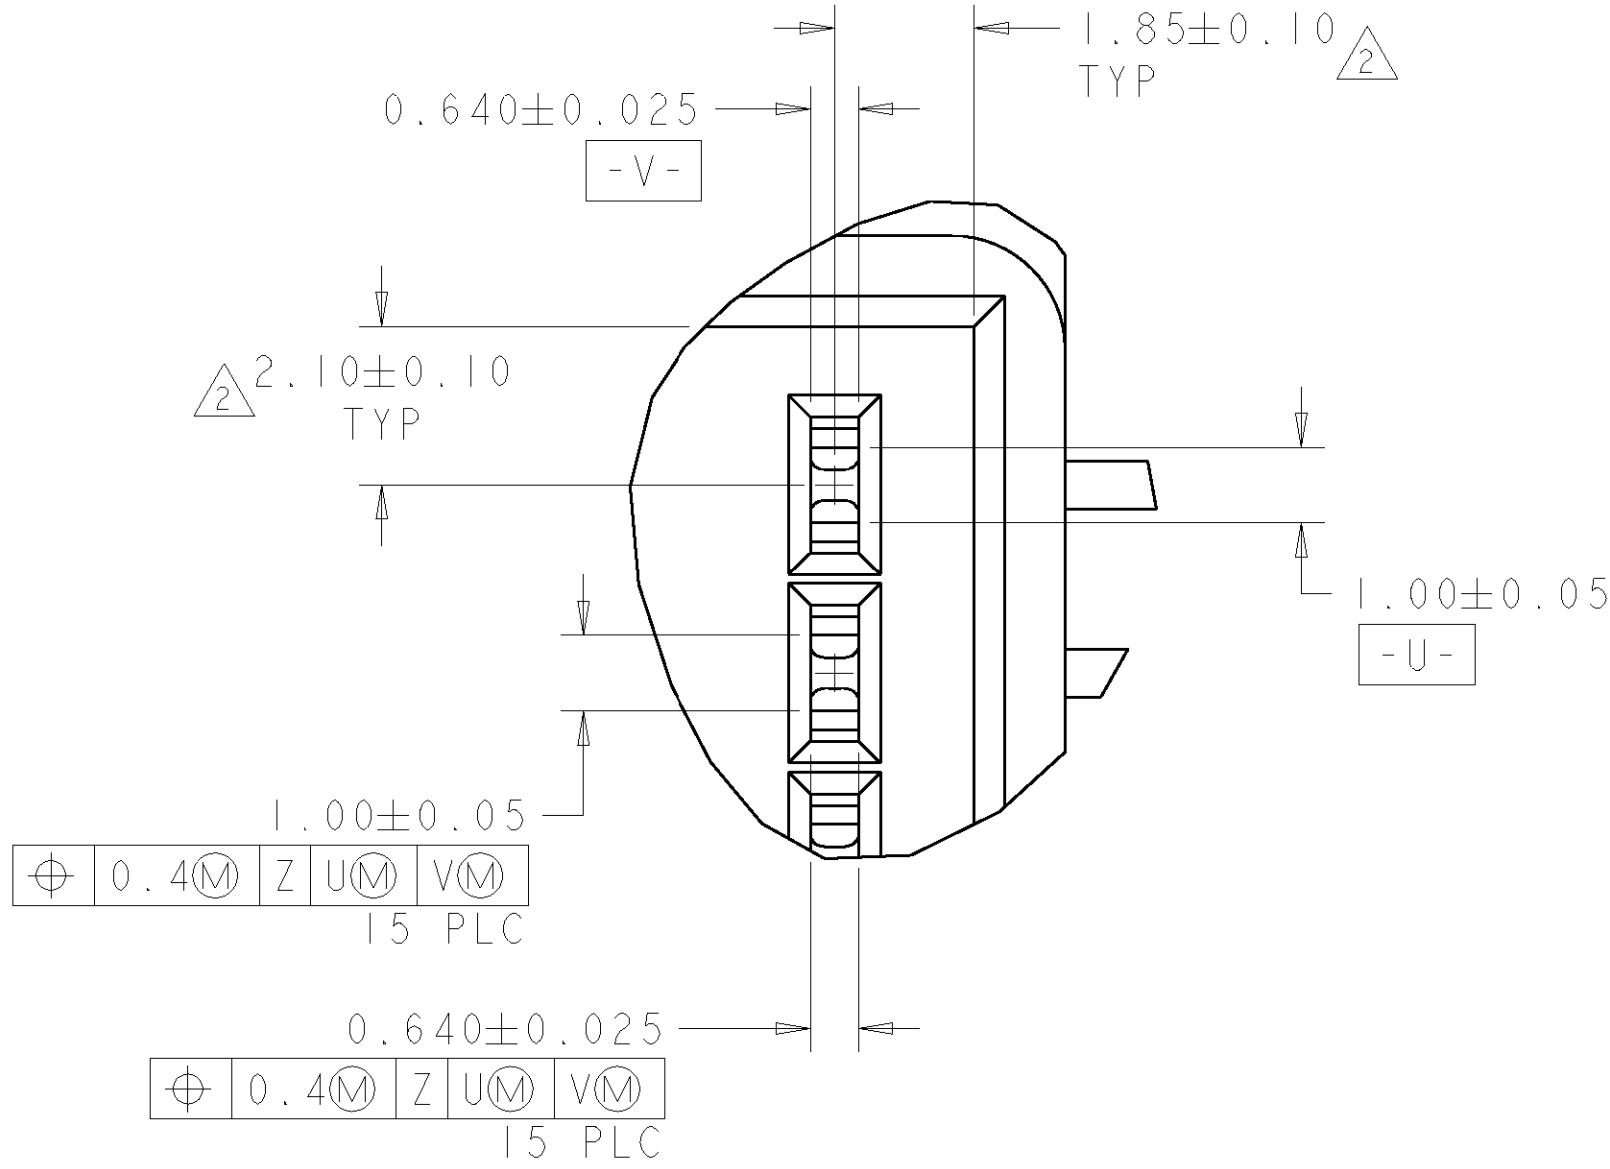

DETAIL D
SCALE 10:1

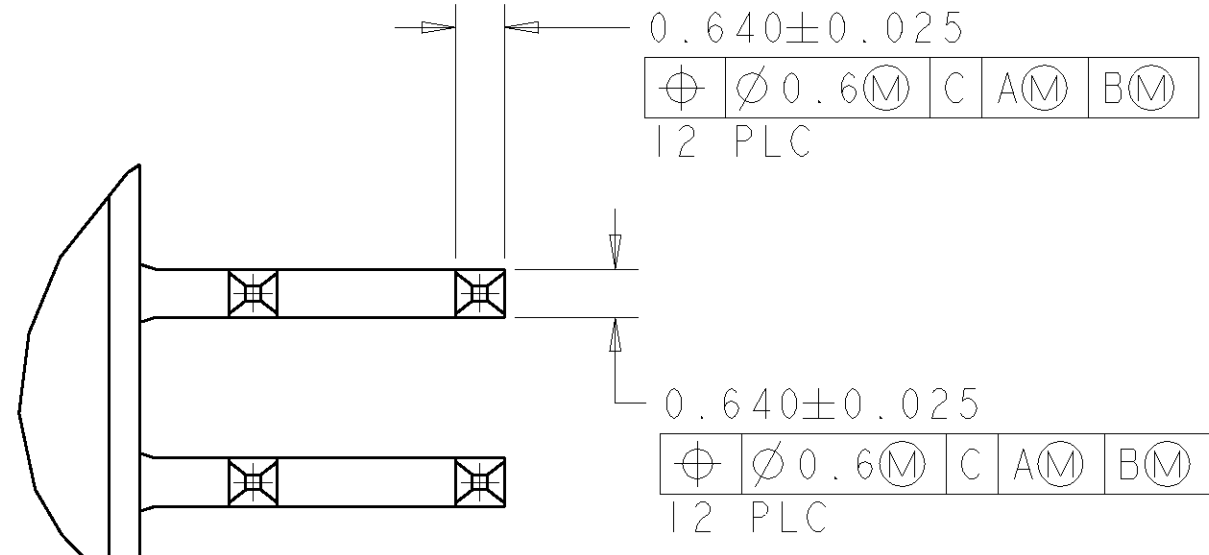

DETAIL C
SCALE 10:1

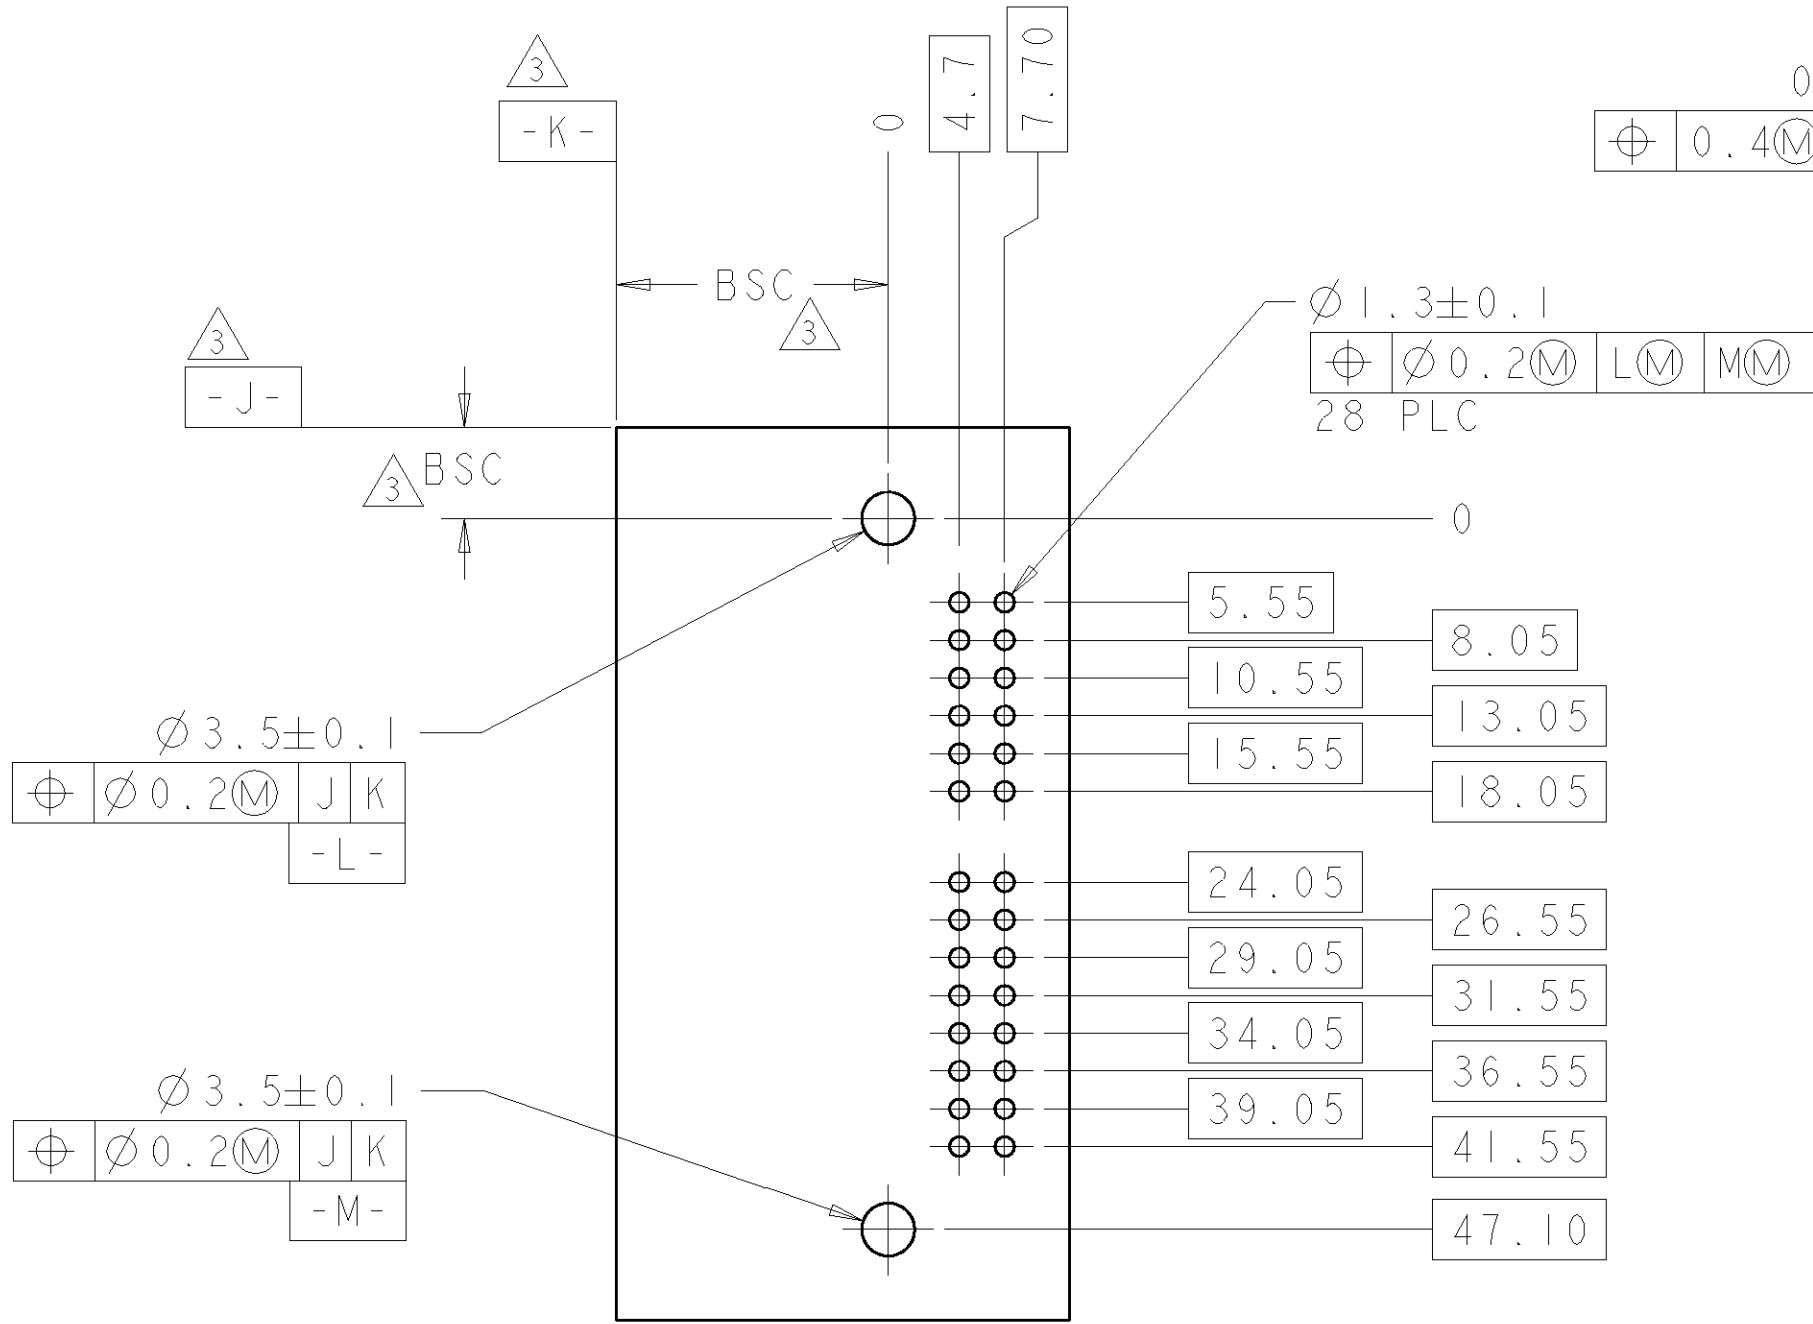

PC BOARD LAYOUT
RECOMMENDED THICKNESS: 1.6MM

- TAB RETENTION FORCE: 3kg MIN
- DIMENSION MUST BE HELD BETWEEN -Z- AND 2.0 FROM -Z-
- DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
- MATING PLUGS: 175965
175966
- DATE CODE
- RECOMMENDED MOUNTING SCREW, 3MM DIA X 6MM LG PAN HEAD SCREW, CLASS 2 TAPPING SCREW AS SPECIFIED IN JIS B1115 AND B1122. TIGHTENING TORQUE: 4KG-CM MAX.

POST TIN	BLACK	9-638672-2
POST TIN	NATURAL	9-638672-1
CONTACT	HOUSING COLOR	PART NUMBER

THIS DRAWING IS UNPUBLISHED. IT IS THE PROPERTY OF AMP INCORPORATED AND IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, WITHOUT PERMISSION IN WRITING FROM AMP INCORPORATED. AMP INCORPORATED IS THE REGISTERED SERVICE MARK OF AMP INCORPORATED.		DWN J MCNEAL 15FEB100	AMP Incorporated Harrisburg, PA 17105-3608	
CHK G MILLER 15FEB100		NAME CAP ASY, 28 POSN, HI TEMP HORIZONTAL 040 SERIES MULTILOCK, I/O CONN, MK11	SIZE CAGE CODE DRAWING NO	
APVD G MILLER 15FEB100		PRODUCT SPEC	RESTRICTED TO	
DIMENSIONS: mm		APPLICATION SPEC	WEIGHT	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 9 PLC ±.3 1 PLC ±0.15 3 PLC ±.15 4 PLC ±.15 ANGLES ±1°		WEIGHT	CUSTOMER DRAWING	
MATERIAL HTN		FINISH	SCALE 2:1	
			SHEET 1 OF 1	
			REV B1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[9-638672-1](#)