

MATERIALS AND FINISHES

COUPLING SLEEVE: BRASS
PLATED NICKEL

BODY: BRASS
PLATED TRI-M3

RETENTION CAP: PHOSPHOR BRONZE
PLATED TRI-M3



INSULATORS: TEFLON

RETENTION SPRING: STAINLESS STEEL
PASSIVATED

GROUND SPRING: BERYLLIUM COPPER
PLATED GOLD OVER TRI-M3

CONTACT: BRASS
PLATED GOLD OVER TRI-M3
SEE TABLE FOR THICKNESS

CRIMP TUBE: BRASS
PLATED NICKEL

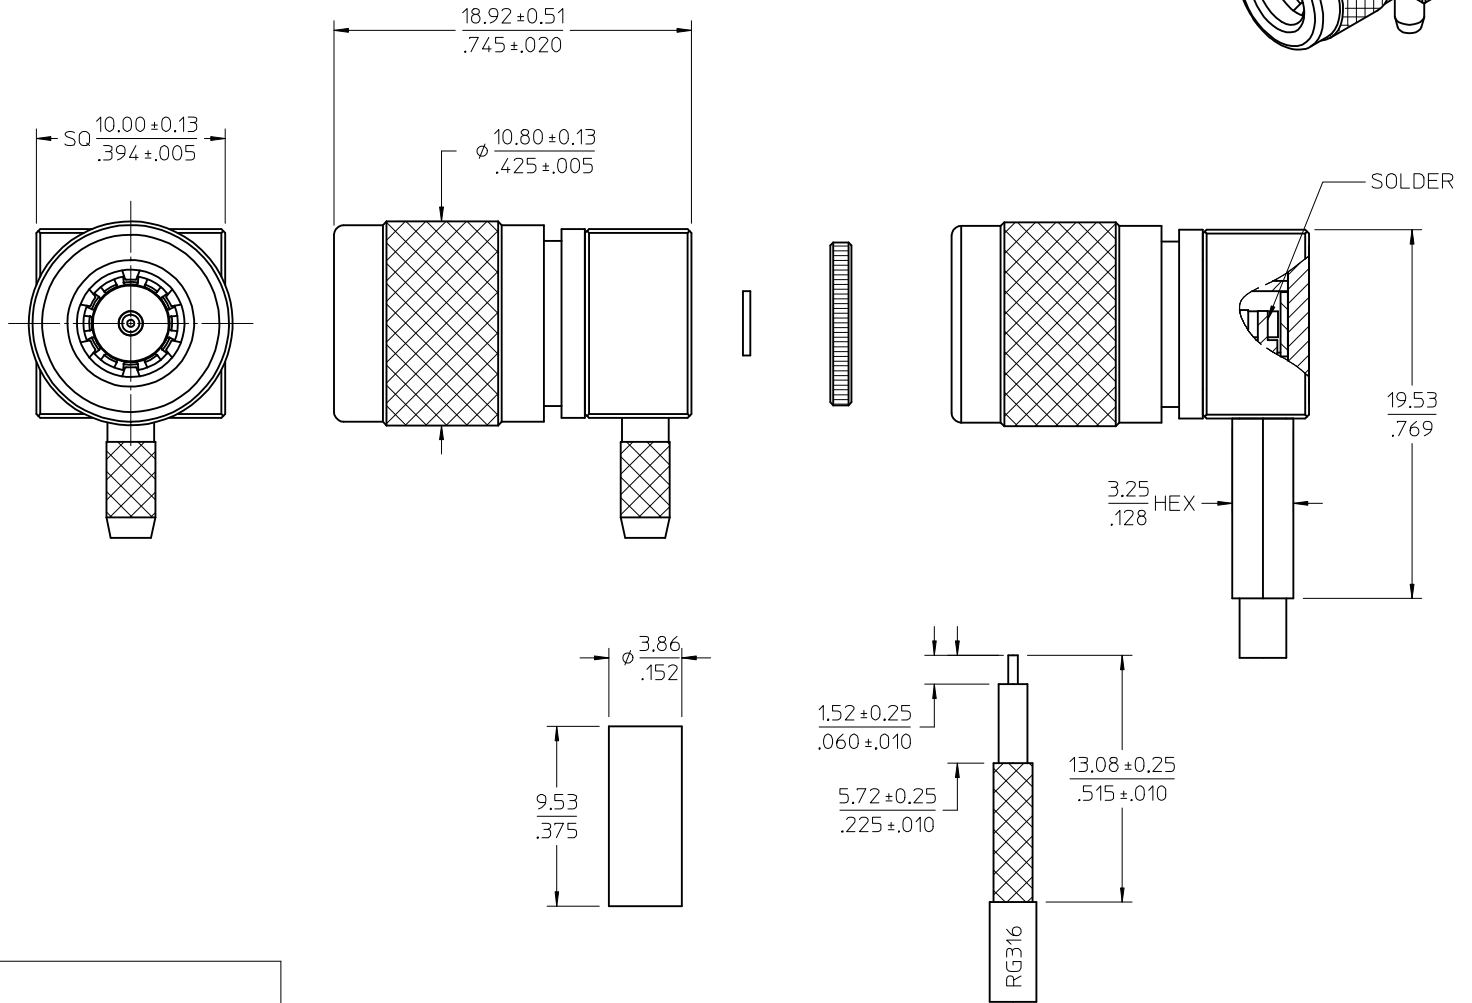

STRIPPING DIMENSIONS

73254-0111	1 PIECE 73254-0110 PER BAG
73254-0110	TRAY
PART NO.	PACKAGING

CHG: UPDATE PACKAGING FOR 73254-0110 PER RF15-E216 EC NO: URF2015-0664 DRW:YEH 2015/05/26 CHKD: APPR:YCHENG 2015/05/29 REV: E2		QUALITY SYMBOLS ∇=0 ∇=0 ∇=0	GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH 4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± --- ± --- 1 PLACE ± --- ± --- 0 PLACE ± --- ± --- ANGULAR ± 2 ° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	DIMENSION STYLE MM/IN DRAWN BY DATE AZR 2004/08/25 CHECKED BY DATE SSS 2004/08/25 APPROVED BY DATE JDW 2004/08/25 MATERIAL NO. SEE TABLE	SCALE 5:1 DESIGN UNITS METRIC THIRD ANGLE PROJECTION	TITLE QMA PLUG RA FOR RG316 CABLE, 50 OHMS QMA-PC molex DOCUMENT NO. SD-73254-011	SHEET NO. 1 OF 1
---	--	--------------------------------------	---	---	--	--	---------------------