
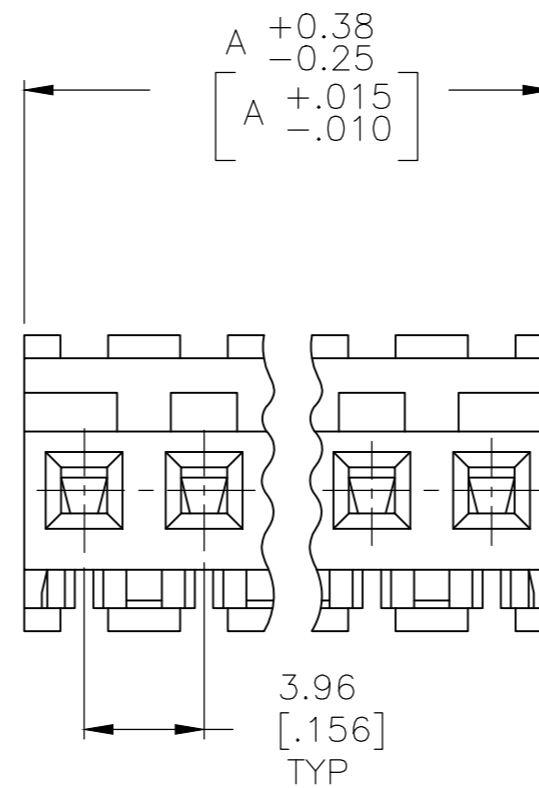
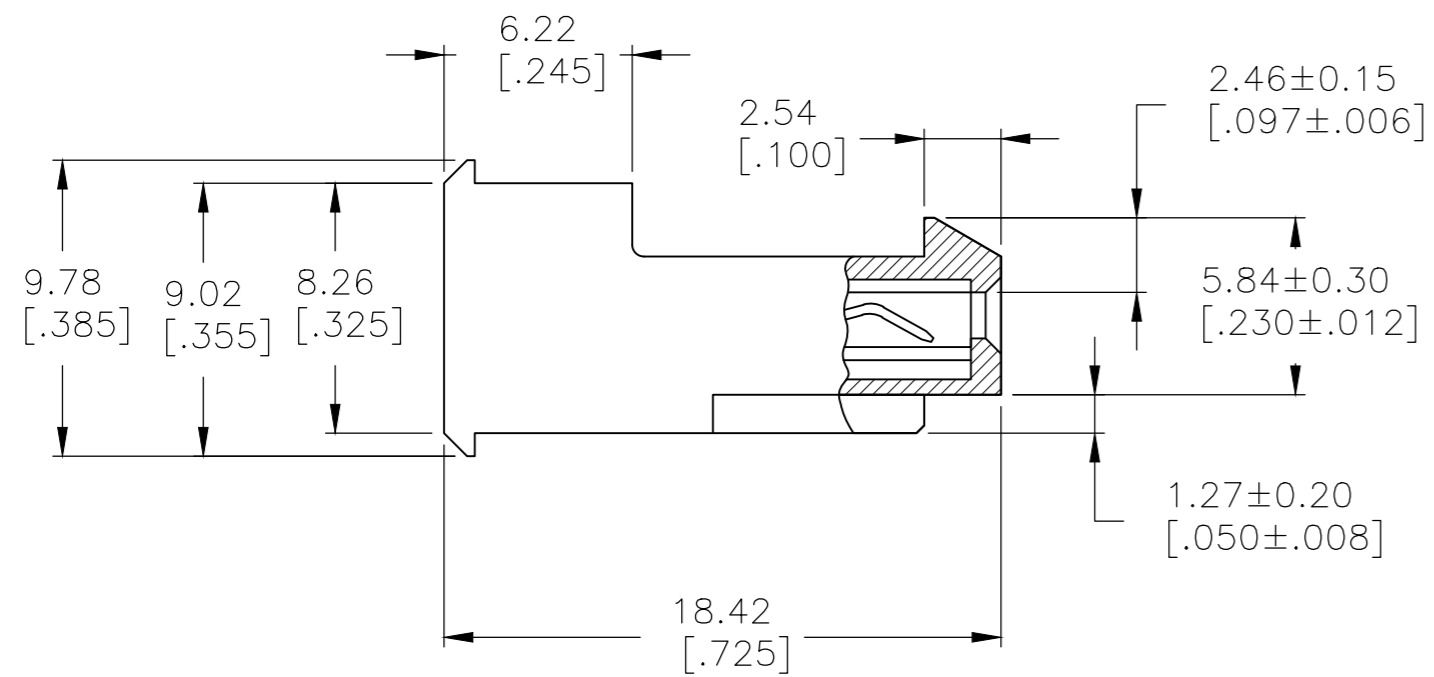


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - TE CONNECTIVITY ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
U2		REVISED PER ECR-17-018209	16MAY2018	BDA	SG

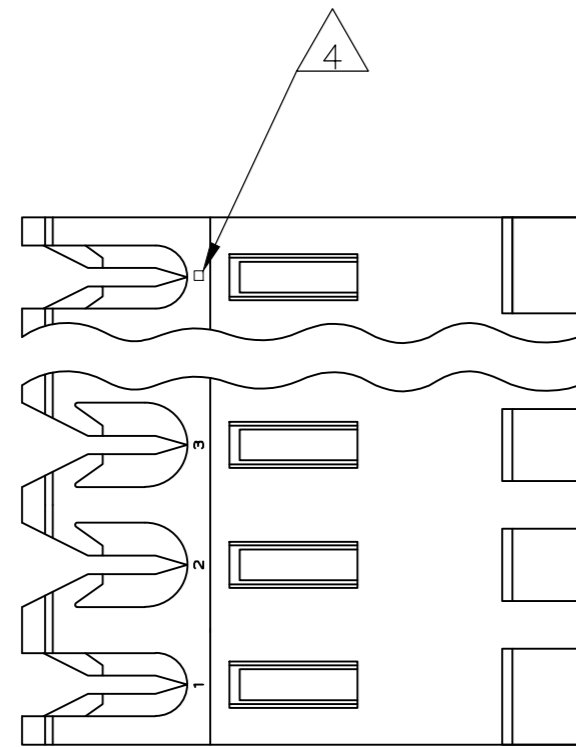

- 1 MATERIAL: CONNECTOR - NYLON UL94V-2 (RED).  
CONTACTS - 0.30[.012] THICK COPPER ALLOY  
(BRIGHT TIN-LEAD 0.00203[.000080] MIN. THICK FOR CONTACTS 640601-2 THRU 2-640601-4)  
(MATTE WHISKER MITIGATED TIN 0.00203[.000080] MIN THICKNESS OVER NICKEL UNDERPLATE FOR 3-640601-2 THRU 5-640601-4).
- 2 CONTACTS ACCEPT 22 AWG WIRE WITH 2.41[.095] MAX INSULATION DIAMETER.
- 3 CONTACTS MUST ACCEPT 1.14±0.03[.045±.001] SQUARE POST AND REMAIN LOCKED IN POSITION.
- 4 IDENTIFICATION NUMBER FOR LAST CIRCUIT MAY NOT APPEAR ON ALL ASSEMBLIES.
- 5 DIMENSIONS IN BRACKETS ARE IN INCHES.
- 6 HOUSING FEATURES ARE: FEED-THRU WITH LOCKING RAMP.
- 7 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
- 8 OBSOLETE PARTS

DIM A		NO OF CIRCUITS	PART NO
95.10	[3.744]	24	5-640601-4
91.14	[3.588]	23	5-640601-3
87.17	[3.432]	22	5-640601-2
83.21	[3.276]	21	5-640601-1
79.25	[3.120]	20	5-640601-0
75.29	[2.964]	19	4-640601-9
71.32	[2.808]	18	4-640601-8
67.36	[2.652]	17	4-640601-7
63.40	[2.496]	16	4-640601-6
59.44	[2.340]	15	4-640601-5
55.47	[2.184]	14	4-640601-4
51.51	[2.028]	13	4-640601-3
47.55	[1.872]	12	4-640601-2
43.59	[1.716]	11	4-640601-1
39.62	[1.560]	10	4-640601-0
35.66	[1.404]	9	3-640601-9
31.70	[1.248]	8	3-640601-8
27.74	[1.092]	7	3-640601-7
23.77	[.936]	6	3-640601-6
19.81	[.780]	5	3-640601-5
15.85	[.624]	4	3-640601-4
11.89	[.468]	3	3-640601-3
7.92	[.312]	2	3-640601-2
OBSOLETE	95.10 [3.744]	24	<del>2-640601-4</del>
SUPERSEDED	91.14 [3.588]	23	<del>2-640601-3</del>
SUPERSEDED	87.17 [3.432]	22	<del>2-640601-2</del>
SUPERSEDED	83.21 [3.276]	21	<del>2-640601-1</del>
SUPERSEDED	79.25 [3.120]	20	<del>2-640601-0</del>
SUPERSEDED	75.29 [2.964]	19	<del>1-640601-9</del>
SUPERSEDED	71.32 [2.808]	18	<del>1-640601-8</del>
SUPERSEDED	67.36 [2.652]	17	<del>1-640601-7</del>
SUPERSEDED	63.40 [2.496]	16	<del>1-640601-6</del>
SUPERSEDED	59.44 [2.340]	15	<del>1-640601-5</del>
SUPERSEDED	55.47 [2.184]	14	<del>1-640601-4</del>
SUPERSEDED	51.51 [2.028]	13	<del>1-640601-3</del>
SUPERSEDED	47.55 [1.872]	12	<del>1-640601-2</del>
SUPERSEDED	43.59 [1.716]	11	<del>1-640601-1</del>
SUPERSEDED	39.62 [1.560]	10	<del>1-640601-0</del>
SUPERSEDED	35.66 [1.404]	9	<del>640601-9</del>
SUPERSEDED	31.70 [1.248]	8	<del>640601-8</del>
SUPERSEDED	27.74 [1.092]	7	<del>640601-7</del>
SUPERSEDED	23.77 [.936]	6	<del>640601-6</del>
SUPERSEDED	19.81 [.780]	5	<del>640601-5</del>
SUPERSEDED	15.85 [.624]	4	<del>640601-4</del>
SUPERSEDED	11.89 [.468]	3	<del>640601-3</del>
SUPERSEDED	7.92 [.312]	2	<del>640601-2</del>

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. LEWIS 12 FEB 91	TE Connectivity Ltd.	
DIMENSIONS: mm [INCHES]		CHK R. SWING 12 FEB 91	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D. CLARK 19 FEB 91	MTA-156 CONNECTOR ASSEMBLY, 22 AWG, STANDARD	
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		PRODUCT SPEC 108-1051	SIZE A2	CAGE CODE 00779
MATERIAL		APPLICATION SPEC 114-1020	DRAWING NO C=640601	RESTRICTED TO -
FINISH		WEIGHT	SCALE 4:1	SHEET 1 OF 1
CUSTOMER DRAWING		REV U2		