
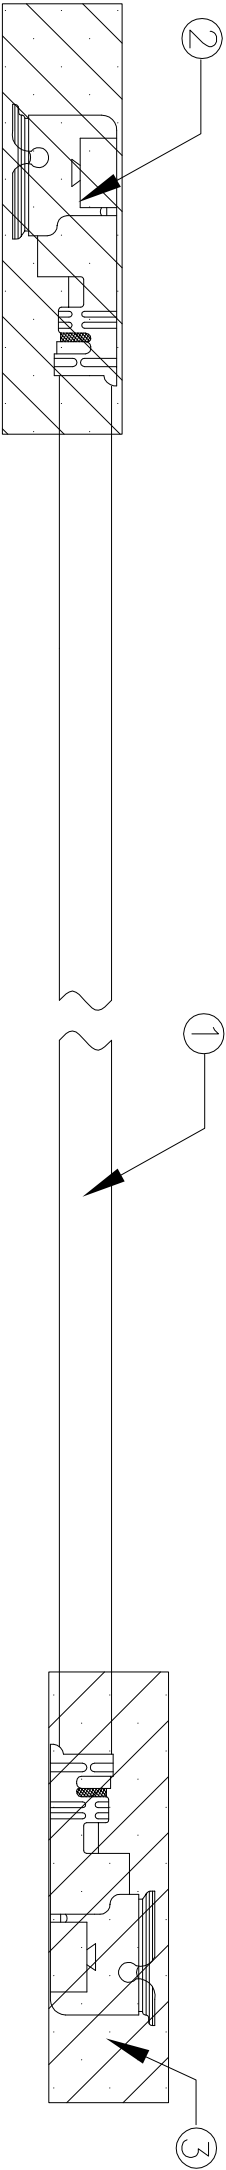


LOC		DIST		REVISIONS								
GP		00		P	LTR	DESCRIPTION			DATE	DWN	APVD	
				A		NEW RELEASE			12FEB09	CP	LZ	

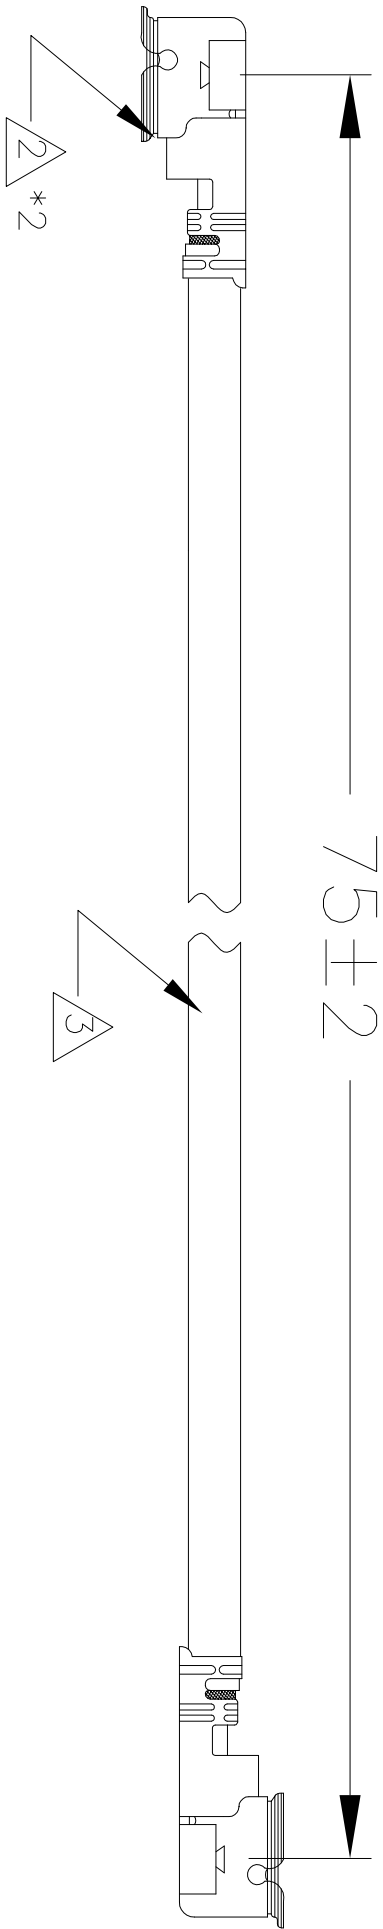

- NOTES:
- CABLE ASSEMBLY TO BE 100% TESTED FOR OPENS, SHORTS AND CONTINUITY

HI-POT: 200 VDC FOR 100MS
INSULATION RESISTANCE: 50M OHMS MIN
CONTINUITY RESISTANCE: 2 OHMS MAX
FREQUENCY RANGE: DC TO 6 GHZ

- CONNECTOR: TYPE III U.FL
SUPPLIER: I-PEX 20278-112R-13
- CABLE: 1.13MM OD, JACKET WHITE, 50 OHMS FEP INSULATED
SUPPLIER: GBE OR TE ENGINEERING APPROVED SUPPLIER
- TWO END U.FL CONNECTORS IN 180 DEGREE DIFFERENCE POSITION
- PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF
TYCO ELECTRONICS STANDARD 230-702

THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN				12FEB09			
DIMENSIONS: mm [INCHES]				TOLERANCES UNLESS OTHERWISE SPECIFIED:				CHK			
0 PLC				± -				APVD			
1 PLC				± -				Lucky Zhang			
2 PLC				± -				Product spec			
3 PLC				± -				APPLICATION SPEC			
4 PLC				± -				WEIGHT			
FINISH				-				CUSTOMER DRAWING			
MATERIAL				-				SIZE			
								A3			
								CAGE CODE			
								00779			
								DRAWING NO			
								G=1513287			
								RESTRICTED TO			
								-			

30	MM	PROTECT TUBING FOR I-PEX 20278	3
2	PC	I-PEX 20278-112R-13 CONNECTOR	2
75	MM	COAXIAL CABLE, WHITE, OD 1.13MM	1
-1	U/M	DESCRIPTION	ITEM

Tyco Electronics
Tyco Electronics Corporation
Harrisburg, PA 17105-3608

FWT3 Ericsson UMTS/Aux cable assembly
White, 75mm, 180degree

DWN	Chen Ping	12FEB09	 Tyco Electronics				Tyco Electronics Corporation Harrisburg, PA 17105-3608				
CHK	Andrew Dong	12FEB09									
APVD	Lucky Zhang	12FEB09	NAME								
Product spec			FWT3 Ericsson UMTS/Aux cable assembly White,75mm,180degree								
APPLICATION SPEC											
WEIGHT			SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO		
—			A3		00779		G=1513287		—		
CUSTOMER DRAWING			SCALE N.T.S. SHEET 1 OF 1 REV A								

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1513287-1](#)