


ZCKJ6

limit switch body ZCKJ - fixed - w/o display -
1NC+1NO - slow-break - Pg13



Product availability: Non-Stock - Not normally stocked in distribution facility

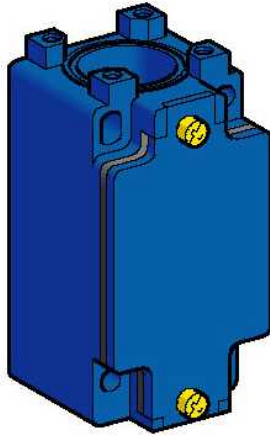

Main

Commercial Status	Commercialised
Range of product	OsiSense XC
Series name	Standard format
Product or component type	Limit switch body
Device short name	ZCKJ
Body type	Fixed
Product compatibility	XCKJ
Associated head	ZCKE05 ZCKE06 ZCKE08 ZCKE21 ZCKE23 ZCKE61 ZCKE619 ZCKE62 ZCKE629 ZCKE63 ZCKE64 ZCKE65 ZCKE66 ZCKE67
Body material	Metal
Cable entry	1 entry tapped for Pg 13.5 cable gland
Number of poles	2
Contacts type and composition	1 NC + 1 NO
Contacts operation	Slow-break, make before break
Number of steps	1 1 position
Contacts material	Silver plated contacts

Complementary

Local display	Without
Electrical connection	Screw-clamp terminals, clamping capacity: 1 x 0.5...2 x 2.5 mm ²
Positive opening	With
Minimum actuation speed	6 m/min
[Ie] rated operational current	0.27 A at 250 V, DC-13, Q300 conforming to EN/IEC 60947-5-1 appendix A 3 A at 240 V, AC-15, A300 conforming to EN/IEC 60947-5-1 appendix A
[Ithe] conventional enclosed thermal current	10 A
[Ui] rated insulation voltage	300 V conforming to CSA C22.2 No 14 contact block 500 V degree of pollution 3 conforming to IEC 60947-1 contact block 300 V conforming to UL 508 contact block
Resistance across terminals	0.25 mOhm conforming to IEC 60255-7 category 3
[Uimp] rated impulse withstand voltage	6 kV conforming to IEC 60947-1 6 kV conforming to IEC 60664
Short circuit protection	10 A by gG cartridge fuse
Electrical durability	5000000 cycles, DC-13 48 V, 9 W, operating rate: < 60 cyc/mn, load factor: 0.5 conforming to IEC 60947-5-1 appendix C 5000000 cycles, DC-13 24 V, 13 W, operating rate: < 60 cyc/mn, load factor: 0.5 conforming to IEC 60947-5-1 appendix C 5000000 cycles, DC-13 120 V, 7 W, operating rate: < 60 cyc/mn, load factor: 0.5 conforming to IEC 60947-5-1 appendix C

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Width	1.57 in (40 mm)
Height	3.03 in (77 mm)
Depth	1.73 in (44 mm)
Product weight	0.68 lb(US) (0.31 kg)
Terminals description ISO n°1	(13-14)NO (21-22)NC

Environment

IP degree of protection	IP65
IK degree of protection	IK08
Ambient air temperature for operation	-40...158 °F (-40...70 °C) for low temperature 10...120 °C for high temperature -13...158 °F (-25...70 °C) for standard environment
Ambient air temperature for storage	-40...120 °C
Environmental characteristic	High temperature Low temperature Standard environment

Ordering and shipping details

Category	22411 - LIMIT SWITCHES,IEC,XCKJ
Discount Schedule	T
GTIN	00785901779124
Nbr. of units in pkg.	1
Package weight(Lbs)	0.80
Product availability	Non-Stock - Not normally stocked in distribution facility
Returnability	N
Country of origin	FR

Offer Sustainability

Sustainable offer status	Green Premium product
RoHS	Compliant - since 1136 - Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold
Product environmental profile	Available Download Product Environmental
Product end of life instructions	Need no specific recycling operations

Contractual warranty

Period	18 months
--------	-----------

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Schneider Electric:](#)

[ZCKJ6](#)