
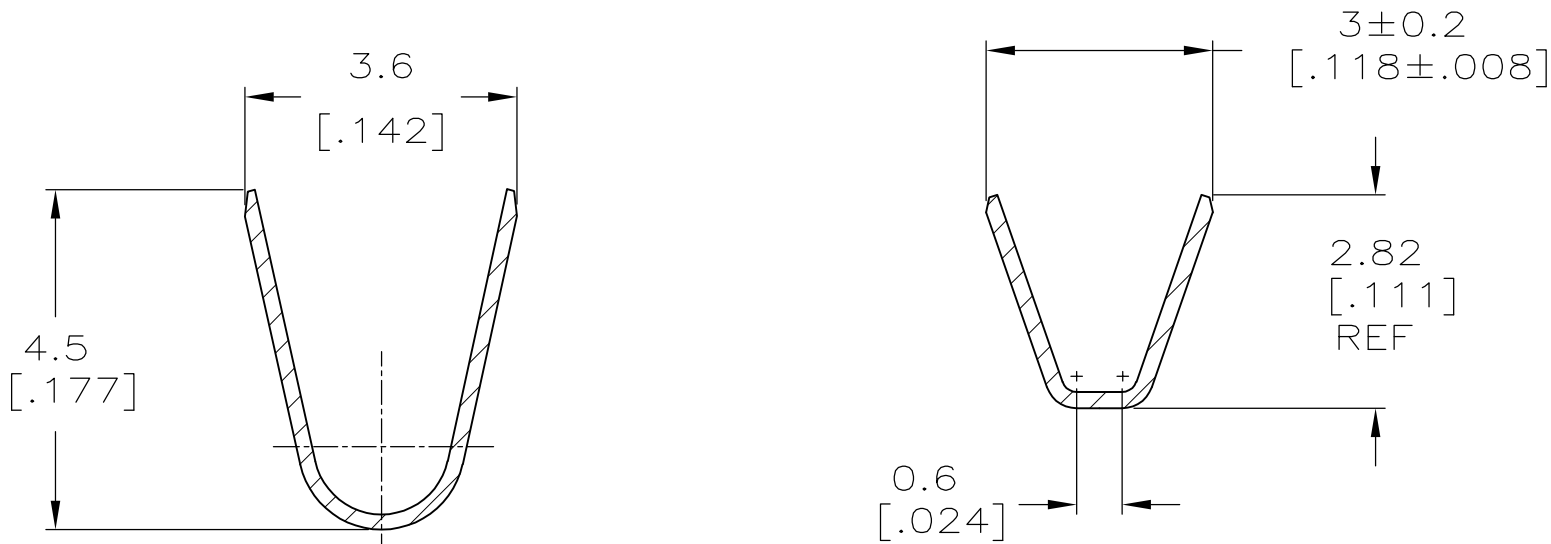
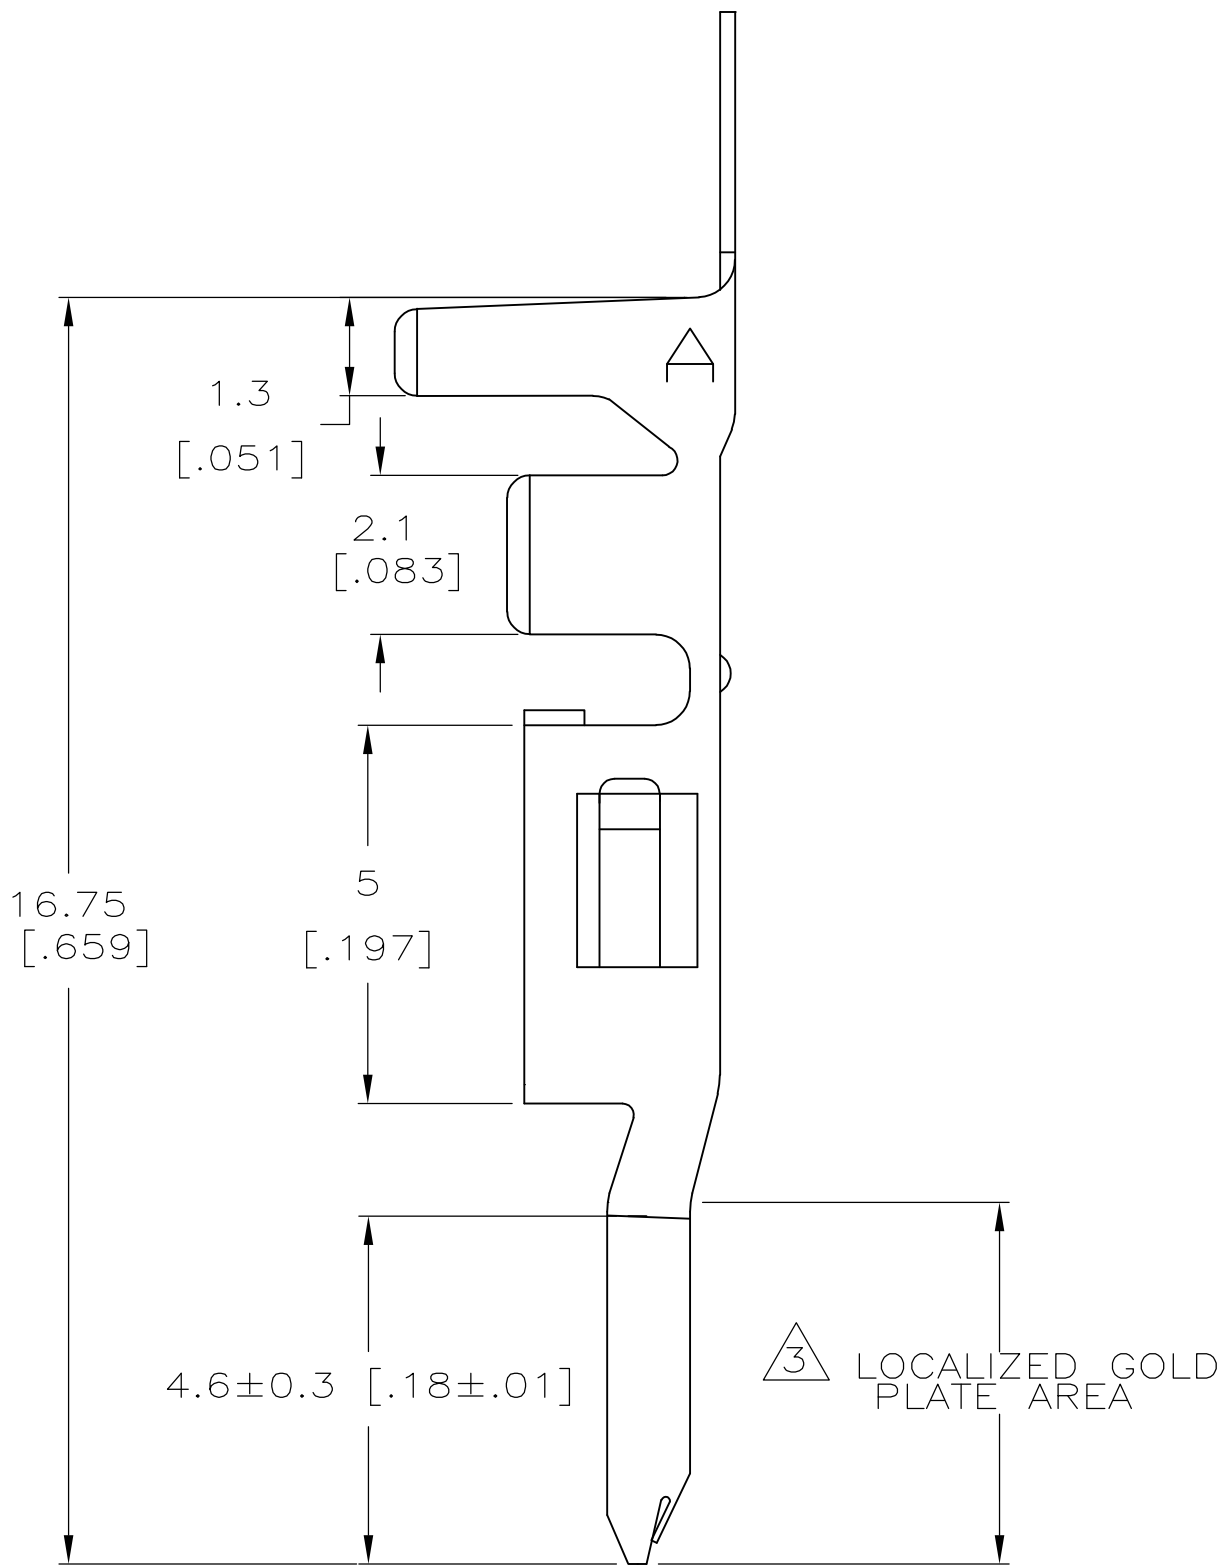



LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
CM	00		C1	REVISED PER ECR-10-013247	25JUN10	HMR	KR

- 1 WIRE RANGE: 1.31mm² (16 AWG)
- 2 INSULATION RANGE: 3.10 [.122] DIA.
- 3 FINISH: 0.76μm [.000030 in] GOLD IN LOCALIZED GOLD PLATE AREA OVER 1.27μm [.00005 in] MINIMUM NICKEL.
- 4 FINISH: 2.54μm [.00001 in] MINIMUM TIN IN LOCALIZED TIN PLATE AREA.
- 5 FINISH: 2.54μm [.00001 in] MINIMUM PRE-TIN ALL OVER.

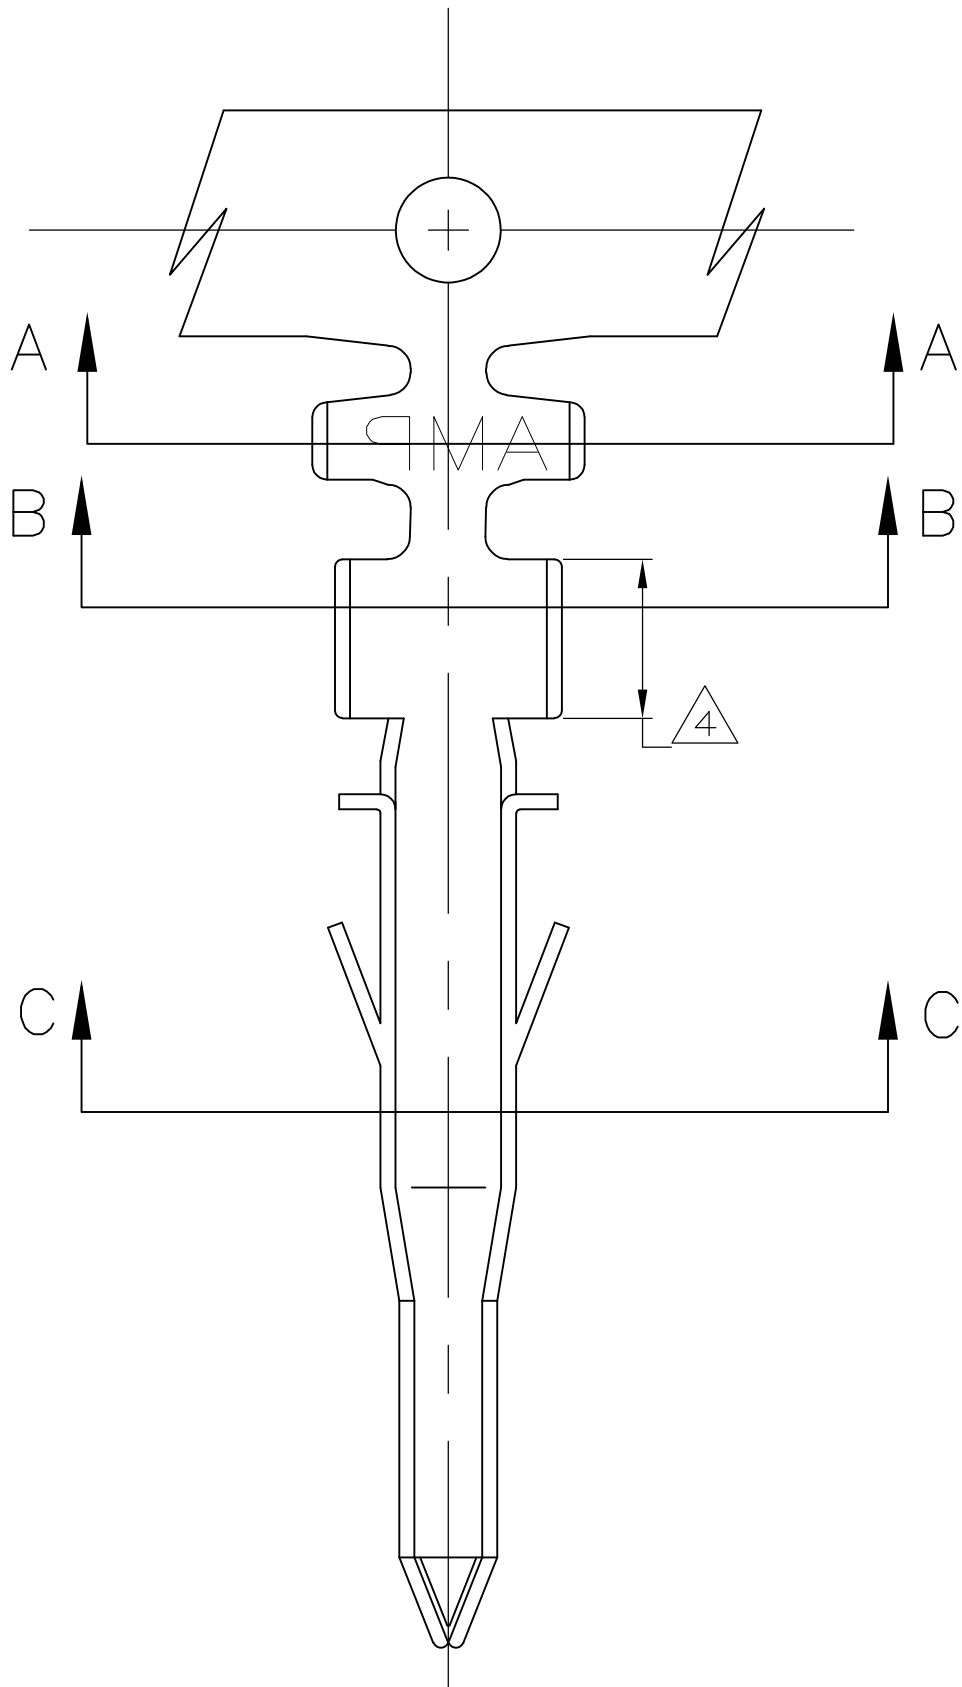

SECTION A-A

SECTION B-B

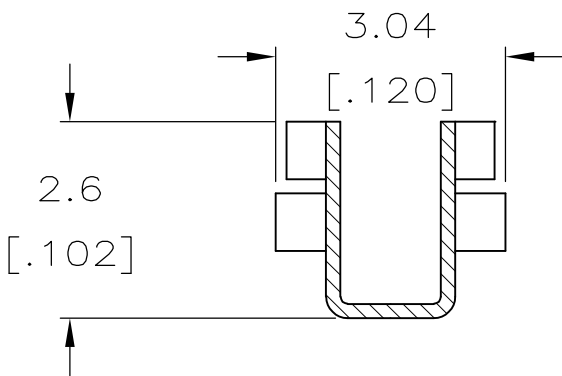

GOLD 3 4	PHOS. BRZ.	1586054-4
PRE-TIN 5	PHOS. BRZ.	1586054-3
GOLD 3 4	BRASS	1586054-2
PRE-TIN 5	BRASS	1586054-1
FINISH	MATERIAL	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. HOOVER 17-NOV-2004	Tyco Electronics Corporation Harrisburg, PA 17105-3608			
DIMENSIONS: mm [INCHES]		CHK D. COLEY 17-NOV-2004				
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 0.13 [.005] 3 PLC ± 4 PLC ± ANGLES ± 0°30'		APVD D. COLEY 17-NOV-2004	NAME TERMINAL, PIN VAL-U-LOK(TM)			
MATERIAL		PRODUCT SPEC	SIZE A2			
FINISH		APPLICATION SPEC	CAGE CODE 00779			
		WEIGHT	DRAWING NO C=1586054			
		CUSTOMER DRAWING	RESTRICTED TO			
		SCALE 10:1	SHEET 1 of 1			
			REV C1			

METRIC

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1586054-3](#)