



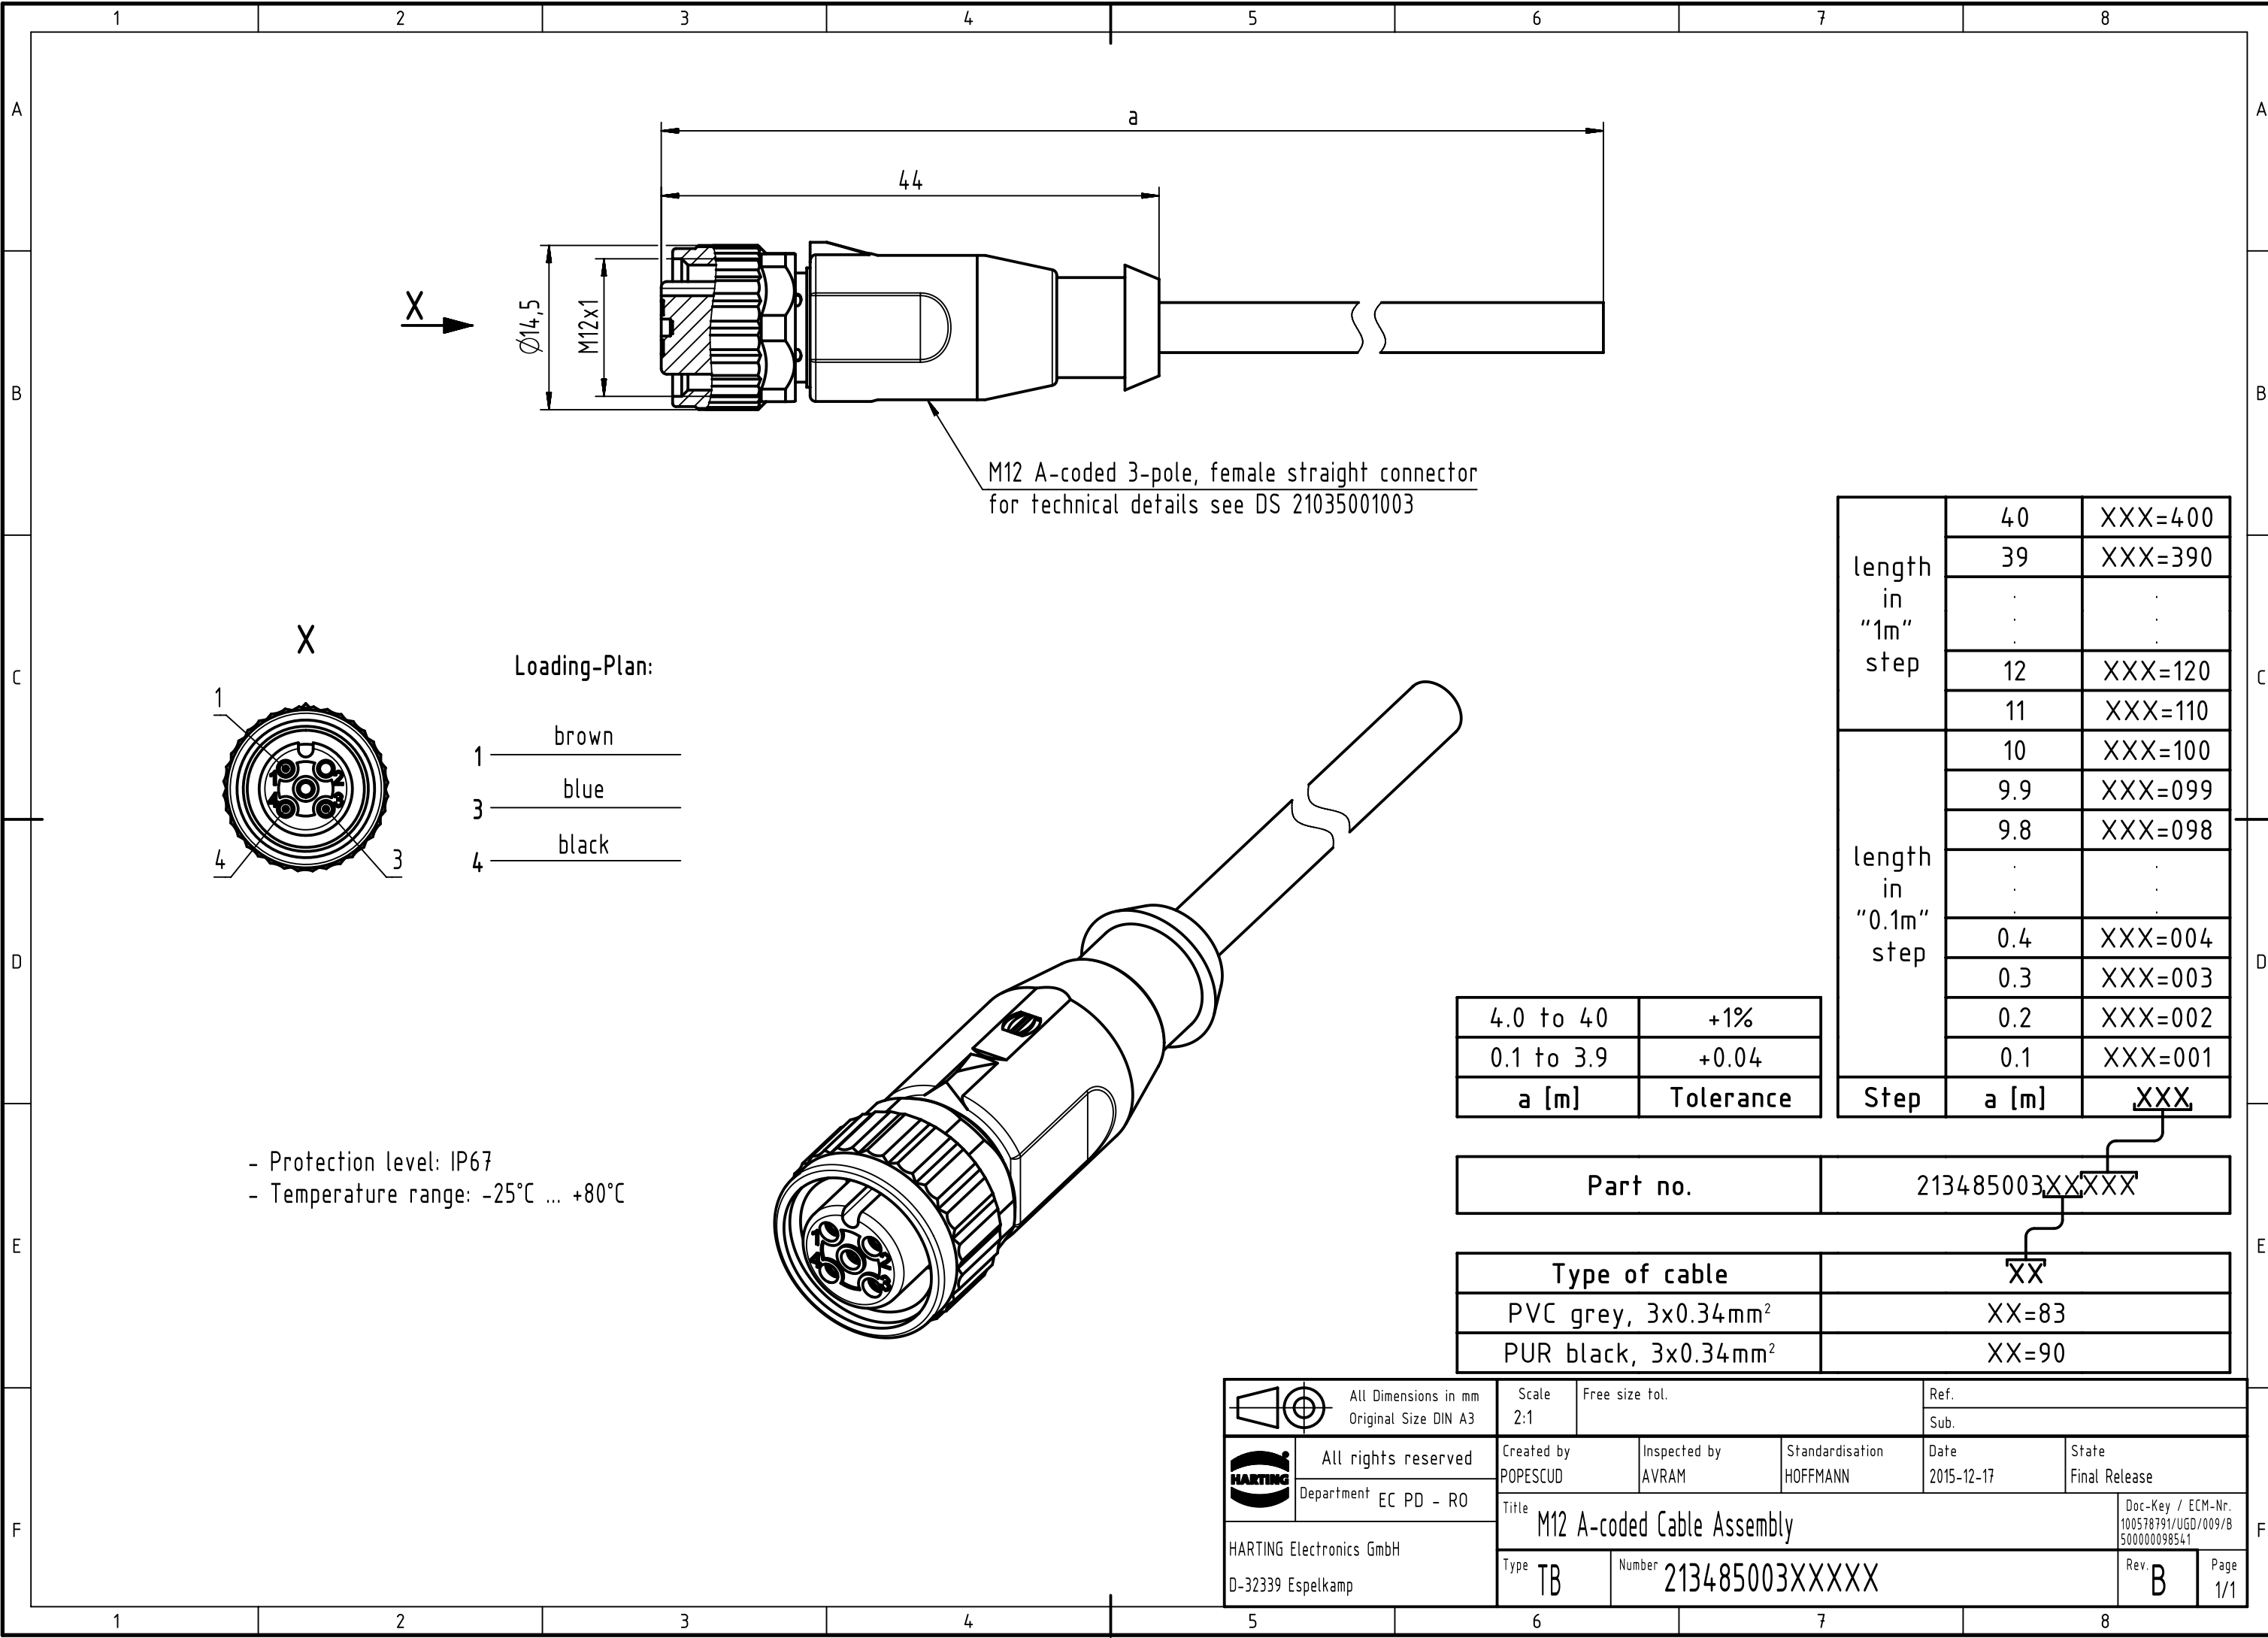

M12 A-coded 3-pole, female straight connector
for technical details see DS 21035001003

Loading-Plan:



- 1 brown
- 3 blue
- 4 black


- Protection level: IP67
- Temperature range: -25°C ... +80°C

length in "1m" step	40	XXX=400
	39	XXX=390
	.	.
	12	XXX=120
length in "0.1m" step	11	XXX=110
	10	XXX=100
	9.9	XXX=099
	9.8	XXX=098
	.	.
	0.4	XXX=004
	0.3	XXX=003
	0.2	XXX=002
	0.1	XXX=001
Step	a [m]	XXX

4.0 to 40	+1%
0.1 to 3.9	+0.04
a [m]	Tolerance

Part no.	213485003XXXXX
----------	----------------

Type of cable	XX
PVC grey, 3x0.34mm ²	XX=83
PUR black, 3x0.34mm ²	XX=90

		All Dimensions in mm Original Size DIN A3		Scale 2:1		Free size tol.		Ref.							
								Sub.							
		All rights reserved Department EC PD - RO		Created by POPESCUD		Inspected by AVRAM		Standardisation HOFFMANN		Date 2015-12-17		State Final Release			
				Title M12 A-coded Cable Assembly										Doc-Key / ECM-Nr. 100578791/UGD/009/B 500000098541	
HARTING Electronics GmbH D-32339 Espelkamp				Type TB		Number 213485003XXXXX						Rev. B		Page 1/1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

HARTING:

[21348500383005](#) [21348500390005](#)