

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

- - -

© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

AD

DIST

00

REVISIONS

P

LTR

A

DESCRIPTION

DATE

DWN

APVD

20DEC2007

RB


MM

1 INSULATOR: THERMOPLASTIC POLYESTER,
UL RATED 94V-0; COLOR-BLACK


2 CONTACT: TAPERED ENTRY BeCu, GOLD PLATE
OF 20μ " MIN. OVER NICKEL PLATE OF 30μ " MIN.

3 SLEEVE: BRASS PLATE OF 180μ " MIN. OVER NICKEL PLATE OF 50μ " MIN.

4 DISTANCE FROM POLARIZATION END OF SOCKET TO CENTER OF FIRST
HOLE IS TYPICALLY .150, EXCEPT FOR 20 POSITION SOCKET IS .250

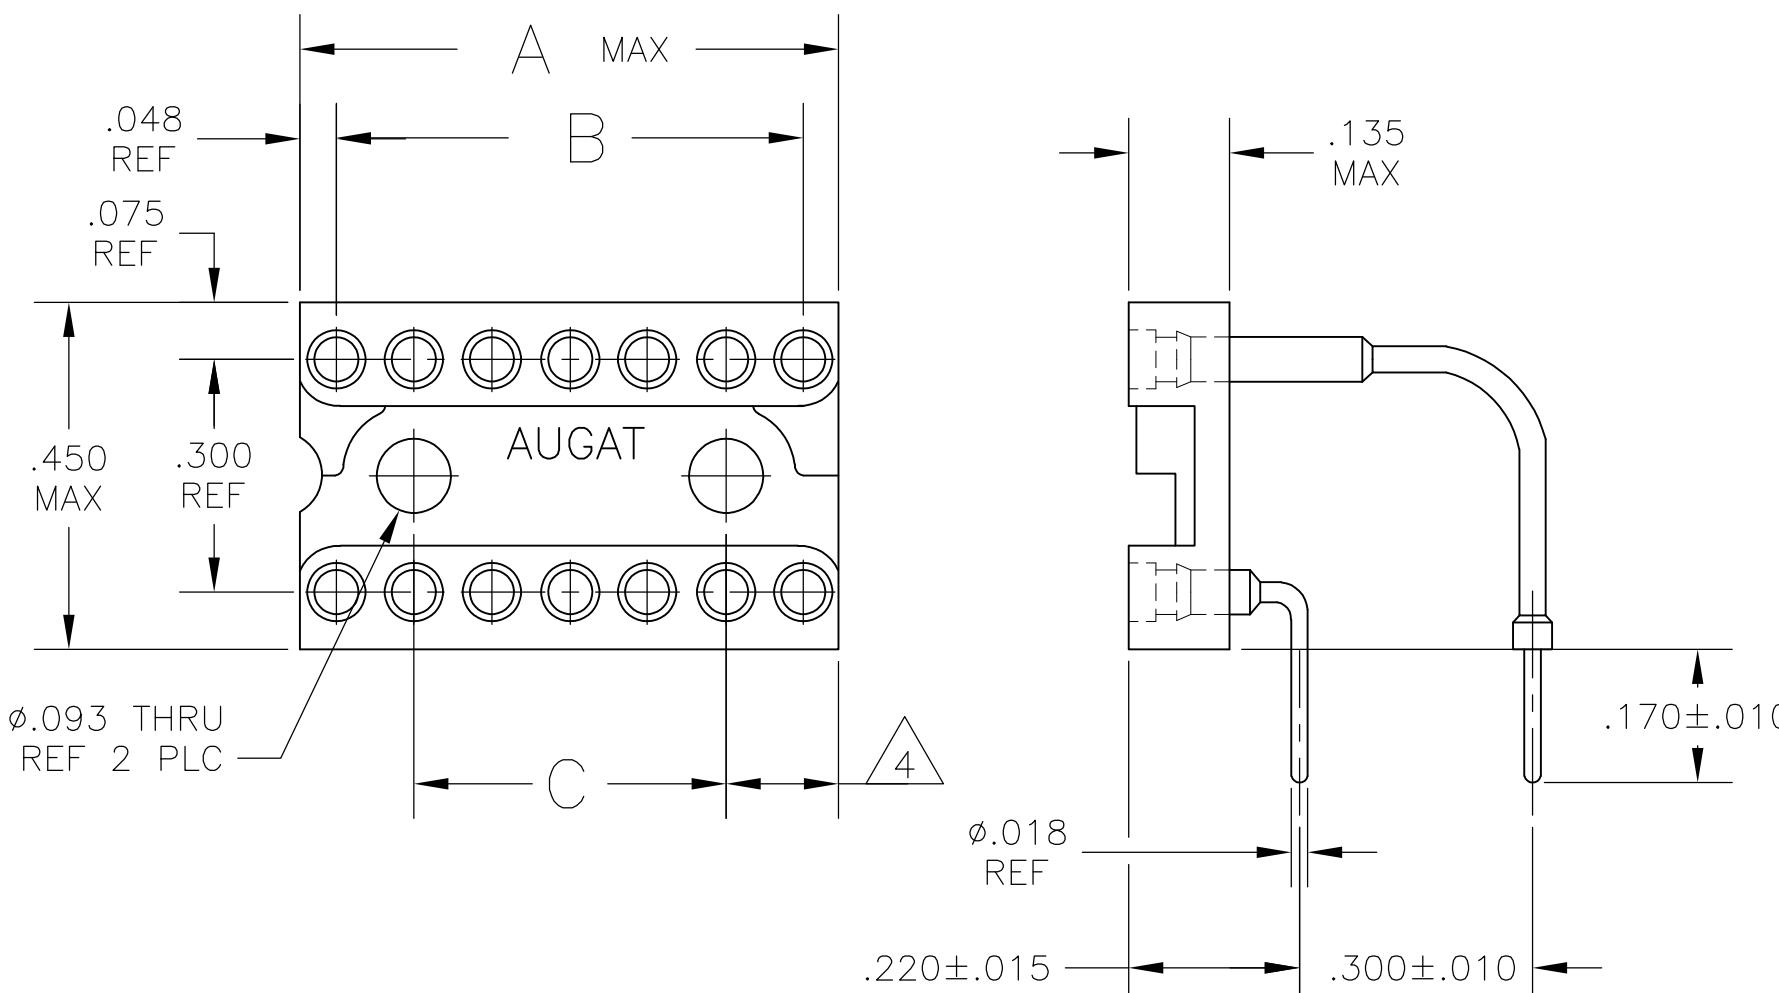

0.500	0.900	1.000	20	1977291-1
C REF	B	A MAX	POS.	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R BROWN CHK M MILLER APVD M MILLER	20DEC2007	Tyco Electronics Corporation Harrisburg, Pa 17105-3608
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME
 0 PLC \pm - 1 PLC \pm - 2 PLC \pm - 3 PLC \pm - 4 PLC \pm - ANGLES \pm -		0 PLC \pm - 1 PLC \pm - 2 PLC \pm - 3 PLC \pm - 4 PLC \pm - ANGLES \pm -		RIGHT ANGLE DIP
MATERIAL SEE NOTES		FINISH SEE NOTES		SIZE CAGE CODE DRAWING NO A300779 C-1977291 RESTRICTED TO
		WEIGHT -		
		CUSTOMER DRAWING		SCALE 4:1 SHEET 1 OF 1 REV A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1977291-1](#)