

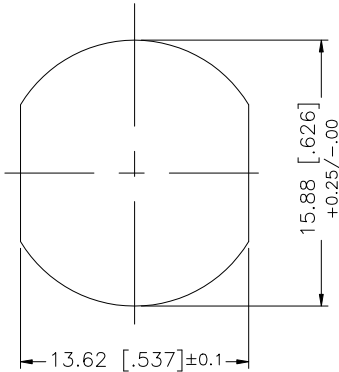


REV.	DATE	ECR NO.	DESCRIPTION
NC	05/25/08	100020	INITIAL RELEASE
A	12/08/08	–	REVISE TO CORRECT BODY STYLE

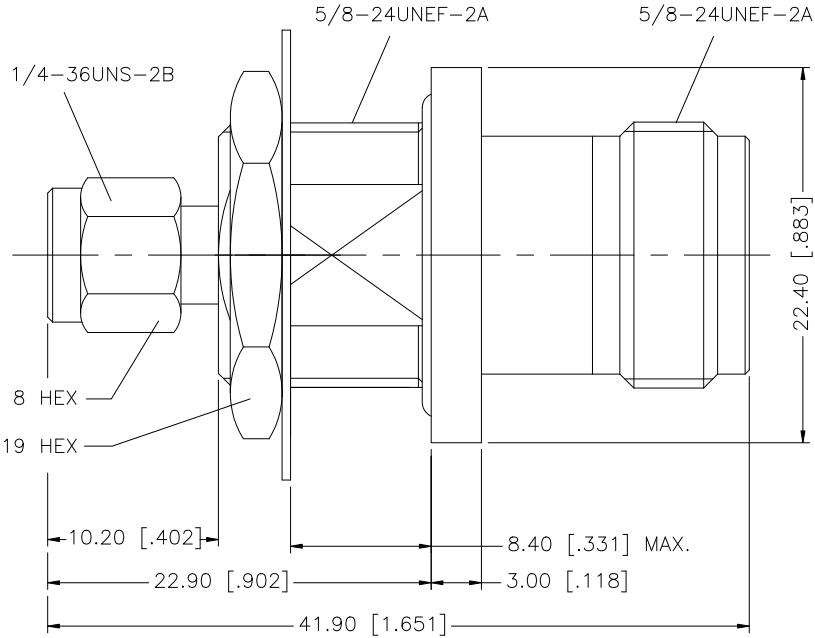

RECOMMENDED
MOUNTING HOLE

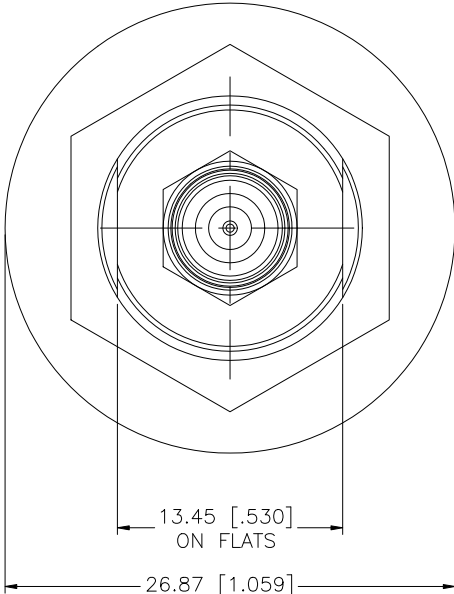

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex									
7						DRAWN	GRS	12/08/08											
6	HEX NUT	BRASS	NEXCOTE	1		CHECKED													
5	LOCK WASHER	BRASS	NEXCOTE	1		ISSUED				PART DESCRIPTION									
4	GASKET	SILICONE	BLACK	1		SHEET	1 OF 1				SMA MALE TO N FEMALE BULKHEAD ADAPTER								
3	CONTACT PIN	PHOS. BRONZE	GOLD	1						PART NO.									
2	INSULATOR	PTFE	NATURAL	1						242235									
1	BODY	BRASS	NEXCOTE	1						DWG. NO.		242235.DWG		REV.	A	SIZE	A	SCALE	NA
DESCRIPTION						MATERIAL	FINISH	QTY	C:/242/242235.DWG										

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[242235](#)