
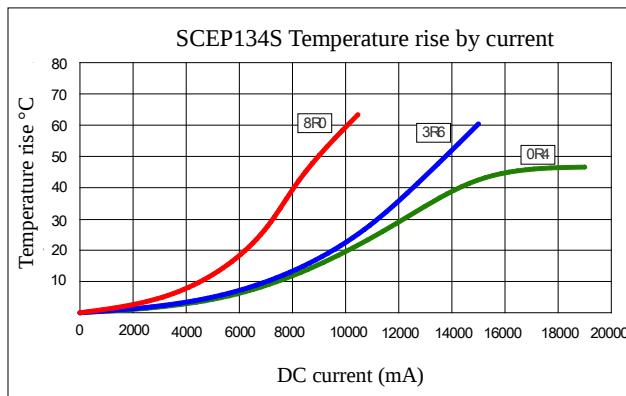


## SMD POWER INDUCTORS

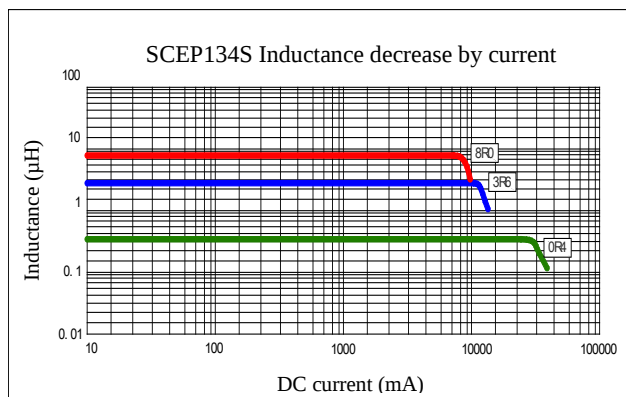

- 1 Excellent Power Density  
2 Engineered to Provide High Efficiency

## ELECTRICAL CHARACTERISTICS

[illegible]

(1). Inductance tolerance for 0.4uH:  $\pm 30\%$ , for 0.9uH~8.0uH:  $\pm 20\%$ . Tested at 0.25V, 0ADC and 25°C

(2). DCR measured at 25°C.

(3). The DC current at which the inductance decreases by 25% from its initial value.

(4). The DC current that results in a 40°C temperature rise from 25°C ambient.

[Click here for QUANTITY PER REEL & PACKING INFORMATION](#)

**Custom versions available upon request.**

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Bel:

[SCEP134S-3R6](#) [SCEP134S-6R4](#) [SCEP134S-1R6](#) [SCEP134S-8R0](#) [SCEP134S-4R8](#) [SCEP134S-R40](#) [SCEP134S-R90](#) [SCEP134S-2R5](#)