

THIS DRAWING IS UNPUBLISHED

RELEASED FOR PUBLICATION

© COPYRIGHT

By

ALL RIGHTS RESERVED

LOC

DIST	
------	--

A

00

REVISIONS

P

LIR

DESCRIPTION

DA

DWRN

APV

N12

BDA


SED. D.

58 59

1188

RK

HM

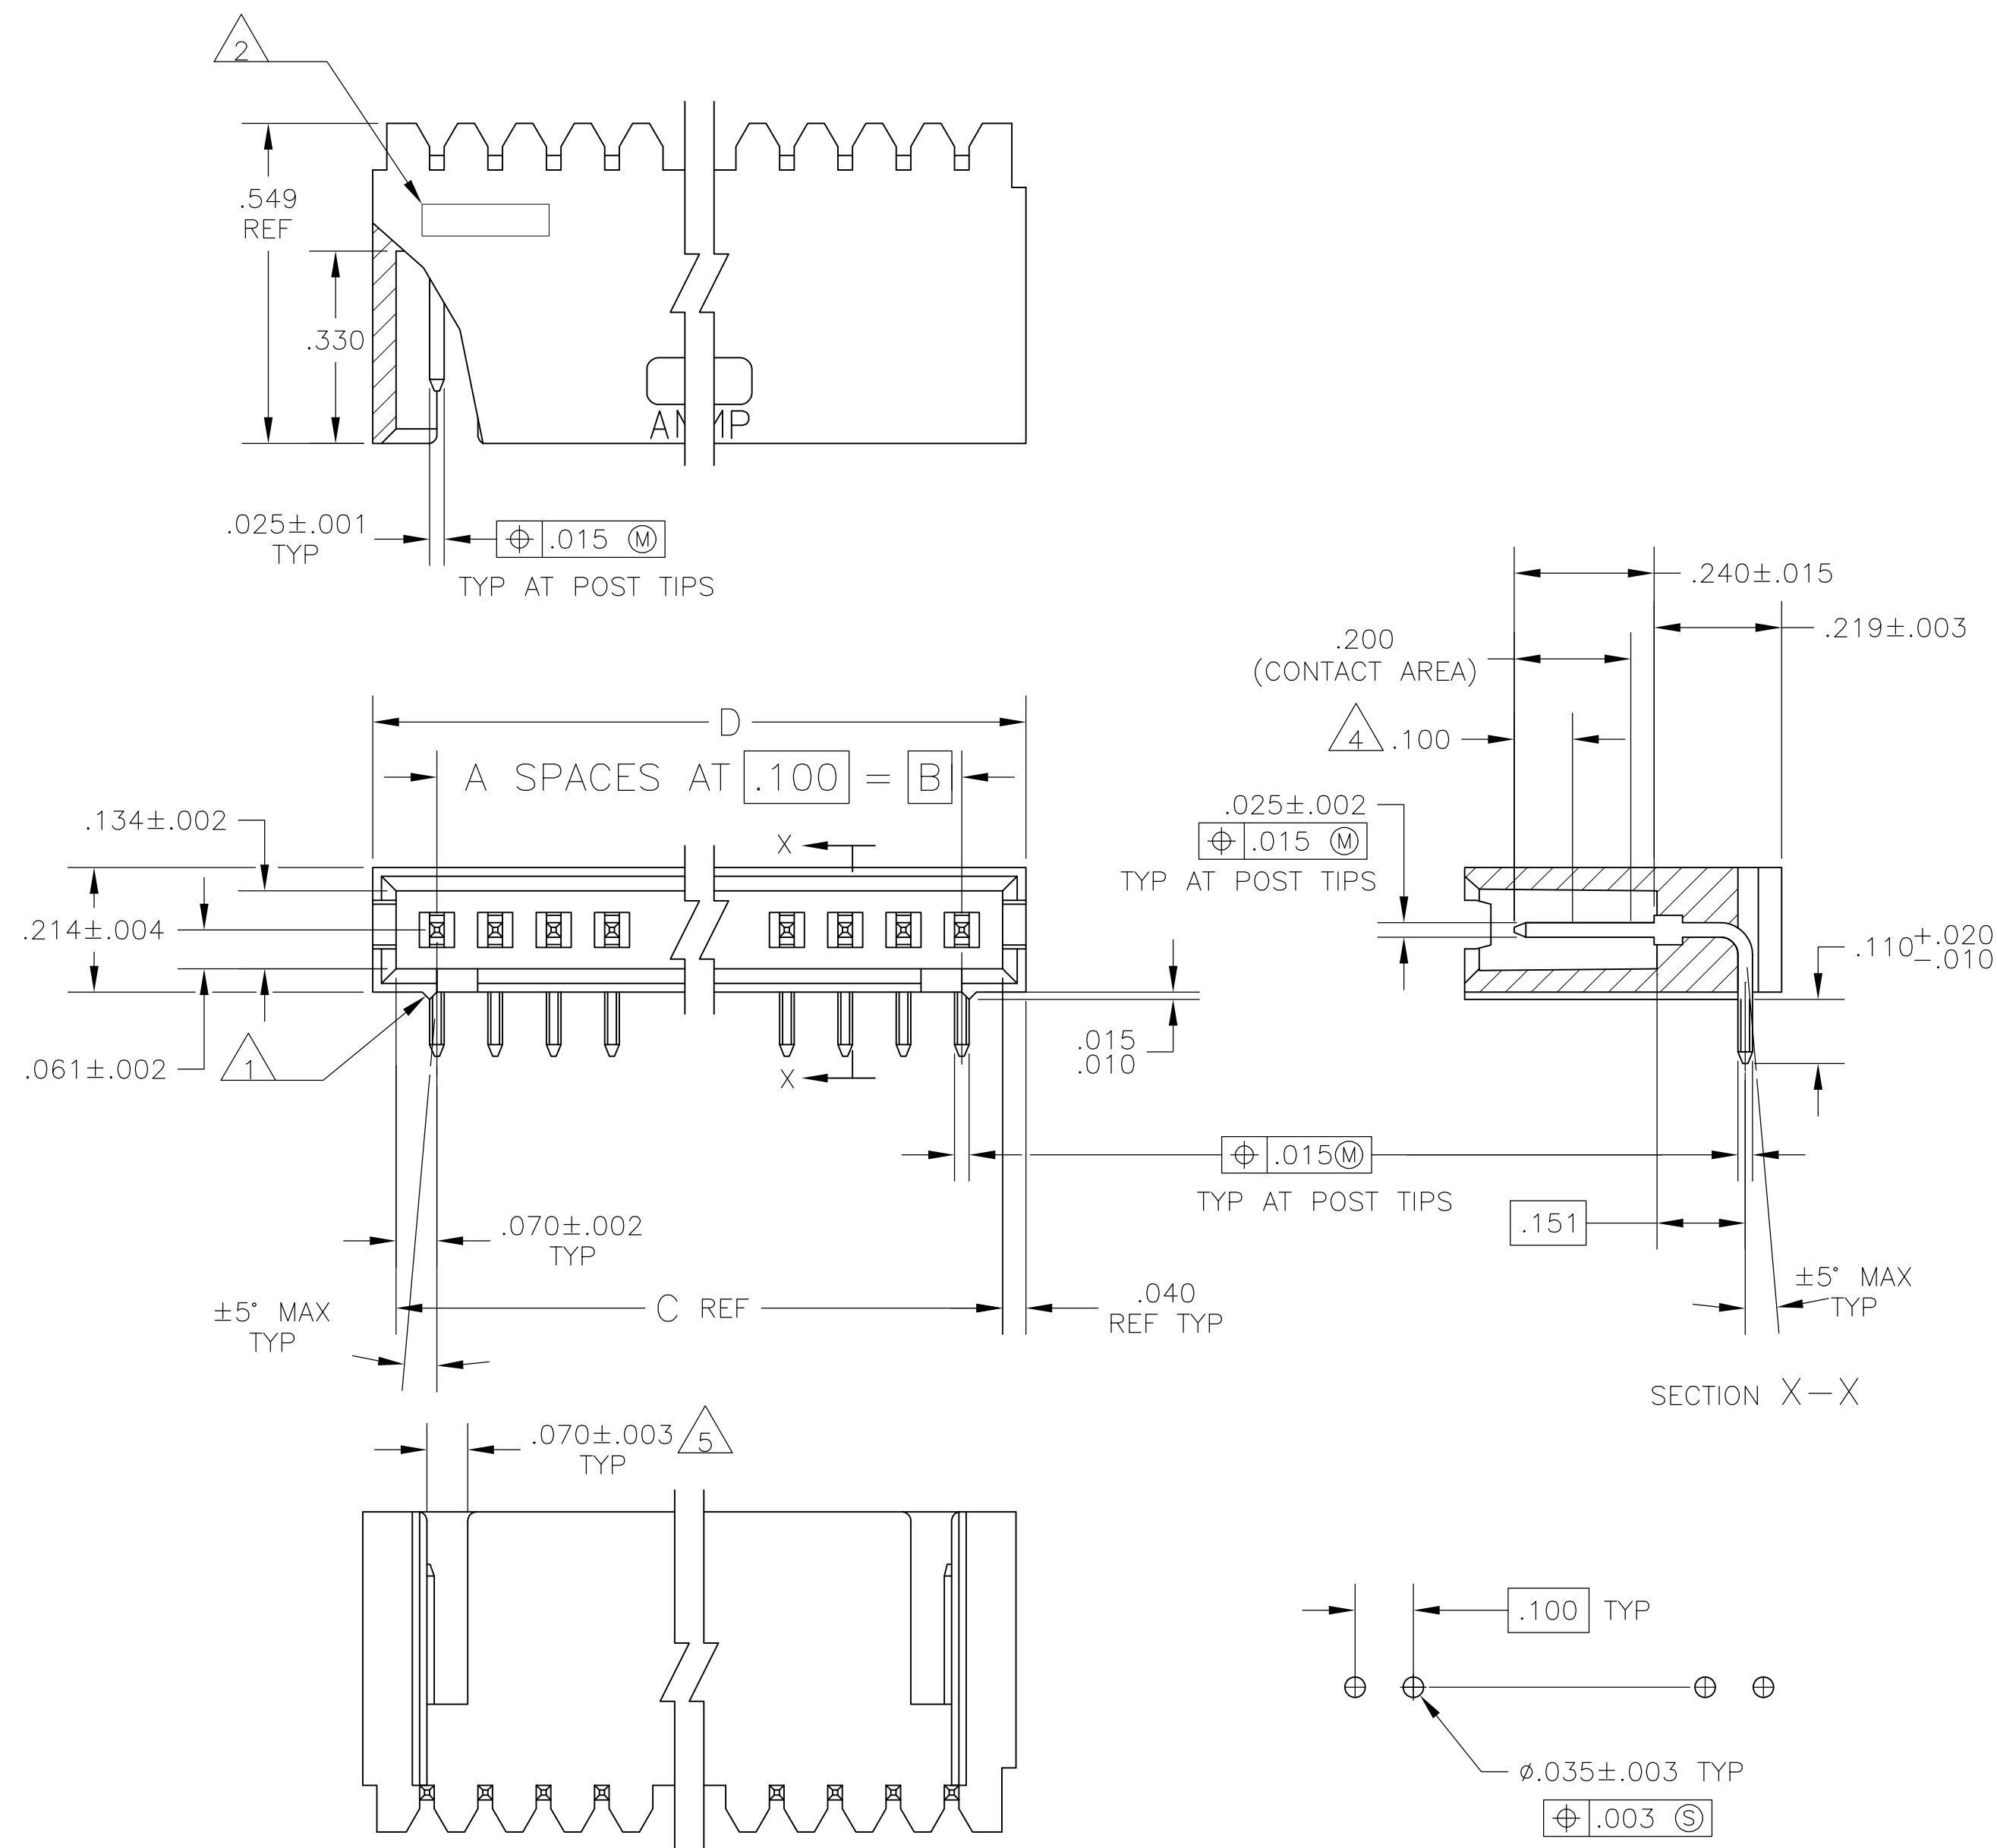

RECOMMENDED HOLE LAYOUT

1 STANDOFFS:
 3 TRHU 9 POSN - (2 REQD) ON OUTSIDE ENDS OF HOUSING
 10 THRU 18 POSN - (3 REQD) TWO ON OUTSIDE ENDS AND
 ONE CENTERED ON HOUSING
 19 POSN AND LARGER - (4 REQD) TWO ON OUTSIDE ENDS
 AND TWO EVENLY SPACED WITHIN
 REMAINING LENGTH OF HOUSING

2 RECESSED DATE CODE

3 .000030 GOLD IN CONTACT AREA, .000100-.000200 MATTE TIN-LEAD IN SOLDER AREA,
ALL OVER .000050 MIN NICKEL


 POINT OF MEASUREMENT FOR GOLD PLATING THICKNESS

△ 5 FOR 3 POS ONLY, ONE SLOT .215 WIDE.

6 .000030 GOLD IN CONTACT AREA, .000100-.000200 MATTE TIN IN SOLDER AREA,
ALL OVER .000050 MIN NICKEL

7 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

OBSOLETE	2.620	2.540	2.400	24	25	7-103361-3	
	2.520	2.440	2.300	23	24	7-103361-2	
	2.420	2.340	2.200	22	23	7-103361-1	
	2.320	2.240	2.100	21	22	7-103361-0	
OBSOLETE	2.220	2.140	2.000	20	21	6-103361-9	
	2.120	2.040	1.900	19	20	6-103361-8	
	2.020	1.940	1.800	18	19	6-103361-7	
	1.920	1.840	1.700	17	18	6-103361-6	
OBSOLETE	1.820	1.740	1.600	16	17	6-103361-5	
	1.720	1.640	1.500	15	16	6-103361-4	
	1.620	1.540	1.400	14	15	6-103361-3	
	1.520	1.440	1.300	13	14	6-103361-2	
OBSOLETE	1.420	1.340	1.200	12	13	6-103361-1	
	1.320	1.240	1.100	11	12	6-103361-0	
OBSOLETE	1.220	1.140	1.000	10	11	5-103361-9	
	1.120	1.040	.900	9	10	5-103361-8	
	1.020	.940	.800	8	9	5-103361-7	
	.920	.840	.700	7	8	5-103361-6	
	.820	.740	.600	6	7	5-103361-5	
	.720	.640	.500	5	6	5-103361-4	
	.620	.540	.400	4	5	5-103361-3	
	.520	.440	.300	3	4	5-103361-2	
	.420	.340	.200	2	3	5-103361-1	
	OBSOLETE	3.720	3.640	3.500	35	36	3-103361-4
	OBSOLETE	3.620	3.540	3.400	34	35	3-103361-3
	OBSOLETE	3.520	3.440	3.300	33	34	3-103361-2
OBSOLETE	3.420	3.340	3.200	32	33	3-103361-1	
OBSOLETE	3.320	3.240	3.100	31	32	3-103361-0	
OBSOLETE	3.220	3.140	3.000	30	31	2-103361-9	
OBSOLETE	3.120	3.040	2.900	29	30	2-103361-8	
OBSOLETE	3.020	2.940	2.800	28	29	2-103361-7	
OBSOLETE	2.920	2.840	2.700	27	28	2-103361-6	
OBSOLETE	2.820	2.740	2.600	26	27	2-103361-5	
OBSOLETE	2.720	2.640	2.500	25	26	2-103361-4	
OBSOLETE	2.620	2.540	2.400	24	25	2-103361-3	
	2.520	2.440	2.300	23	24	2-103361-2	
OBSOLETE	2.420	2.340	2.200	22	23	2-103361-1	
	2.320	2.240	2.100	21	22	2-103361-0	
	2.220	2.140	2.000	20	21	1-103361-9	
OBSOLETE	2.120	2.040	1.900	19	20	1-103361-8	
	2.020	1.940	1.800	18	19	1-103361-7	
	1.920	1.840	1.700	17	18	1-103361-6	
	1.820	1.740	1.600	16	17	1-103361-5	
OBSOLETE	1.720	1.640	1.500	15	16	1-103361-4	
	1.620	1.540	1.400	14	15	1-103361-3	
	1.520	1.440	1.300	13	14	1-103361-2	
	1.420	1.340	1.200	12	13	1-103361-1	
OBSOLETE	1.320	1.240	1.100	11	12	1-103361-0	
	1.220	1.140	1.000	10	11	103361-9	
	1.120	1.040	.900	9	10	103361-8	
	1.020	.940	.800	8	9	103361-7	
	.920	.840	.700	7	8	103361-6	
	.820	.740	.600	6	7	103361-5	
	.720	.640	.500	5	6	103361-4	
	.620	.540	.400	4	5	103361-3	
OBSOLETE	.520	.440	.300	3	4	103361-2	
	.420	.340	.200	2	3	103361-1	
	PLATING	D	C	B	A	NO. OF POSN.	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S.A.SHUEY 28SEP89 QWK H.MOLL 30CT89 APWD P.FLOCKER 30CT89		 TE Connectivity	
DIMENSIONS: INCHES 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 .PLC ± . 1 .PLC ± . 2 .PLC ± .005 3 .PLC ± . 4 .PLC ± . ANGLE'S ± . FINISH SEE TABLE		NAME HEADER ASSEMBLY, MOD II, SINGLE ROW .100 CL, RIGHT ANGLE -	
MATERIAL HOUSING - FLAME RETARDANT THERMOPLASTIC POLY-BLACK POSTS:PHOS BRONZE		APPLICATION SPEC WEIGHT -		SIZE A1	
		WEIGHT -		CASE CODE 00779	
		WEIGHT -		DRAWING NO C-103361	
		WEIGHT -		RESTRICTED -	
		CUSTOMER DRAWING		SCALE 4:1 SHEET 1 OF 1 REV N2	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[103361-6](#)