











STANDARD PLCC SOCKETS

SERIES 940 • SURFACE MOUNT



RECTANGULAR *

- Note: Not end stackable
- Accepts JEDEC PLCCs MO-047 and MO-052
- Low profile for high density PC board stacking
- Standoffs provide clearance for heat dissipation and cleaning
- Contacts are plated with 150 μ" tin
- Insulator material is glass reinforced PPS
- For Electrical, Mechanical and Environmental Data, see page 141 for details

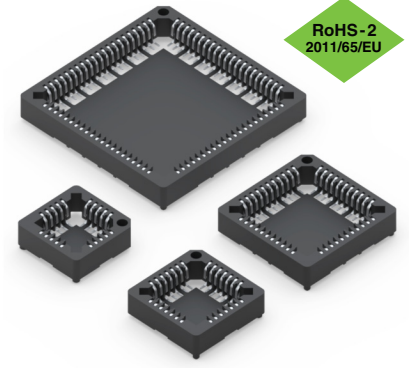

PCB LAYOUT FOR SURFACE MOUNT

| Number of Contacts | Ordering Information | - A - | - B - | - C - | Qty. per Tube | Qty. per Reel |
|--------------------|---|--------------|--------------|--------------|---------------|---------------|
| 20 | 940-44-020-17-40000X | 0.613 | 0.200 | 0.334 | 32 | 470 |
| 28 | 940-44-028-17-40000X | 0.713 | 0.300 | 0.434 | 27 | 390 |
| 32 * | 940-44-032-17-40000X * | 0.813 / .713 | 0.400 / .300 | 0.534 / .434 | 24 | 390 |
| 44 | 940-44-044-17-40000X | 0.900 | 0.500 | 0.634 | 21 | 250 |
| 52 | 940-44-052-17-40000 ⁴ (Only) | 1.013 | 0.600 | 0.734 | 19 | 250 |
| 68 | 940-44-068-17-40000X | 1.213 | 0.800 | 0.934 | 16 | 220 |
| 84 | 940-44-084-17-40000X | 1.413 | 1.000 | 1.134 | 14 | 200 |

Packaging Codes: X = 0 (Tubes)
X = 4 (Tape & Reel)



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Mill-Max:

[940-44-068-17-400000](#) [940-44-084-17-400000](#) [940-44-044-17-400000](#) [940-44-020-17-400000](#) [940-44-032-17-400000](#) [940-44-028-17-400000](#) [940-44-052-17-400000](#) [940-44-020-17-400004](#) [940-44-028-17-400004](#) [940-44-032-17-400004](#) [940-44-044-17-400004](#) [940-44-052-17-400004](#) [940-44-068-17-400004](#) [940-44-084-17-400004](#)