

20

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.


THIS DRAWING IS UNPUBLISHED.

BY -

COPYRIGHT 20

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	C1	Redrawn to Creo	06MAR2017	JJH	JP

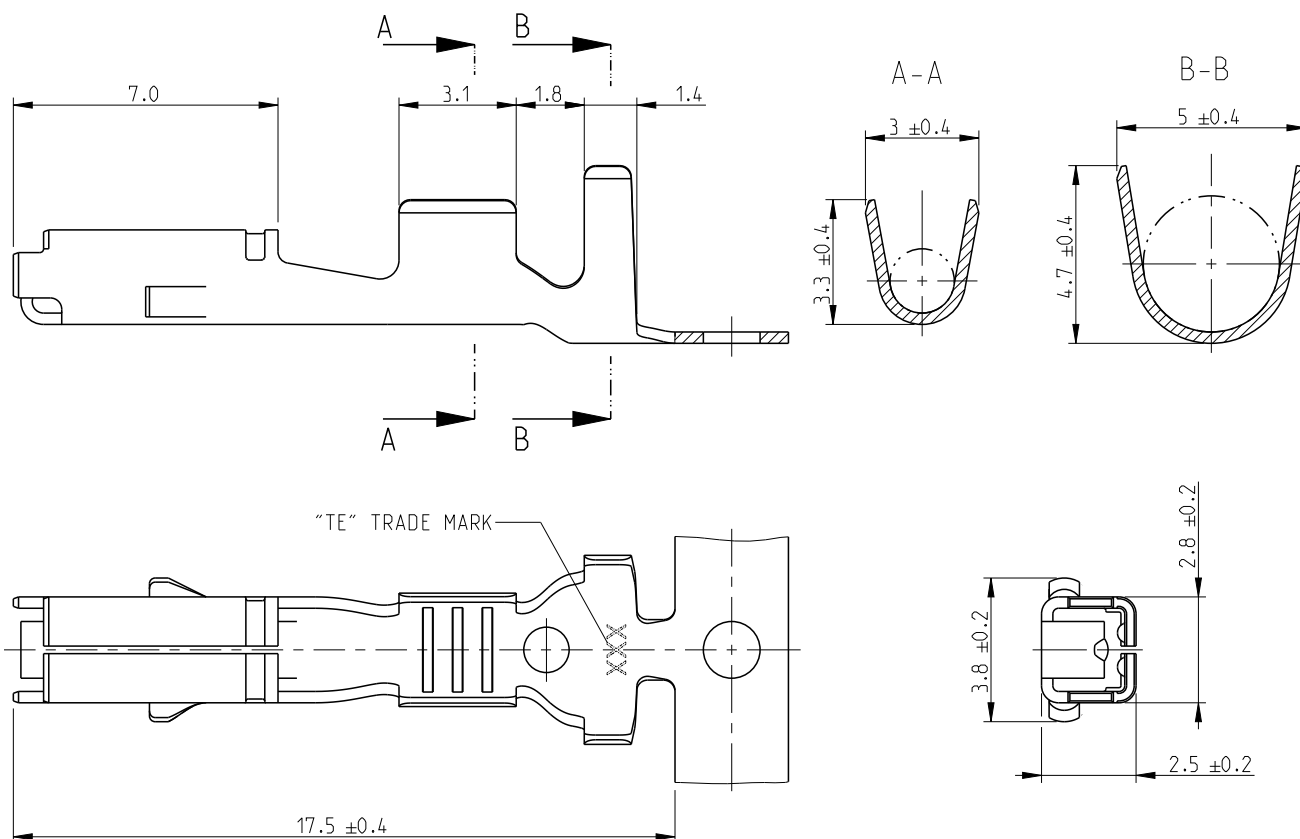

1. DELIVERY STATE: WRAPPED UP ROLL WITH STEP BETWEEN TERMINALS = 11.9 ± 0.2 mm
 STATO DI FORNITURA: AVVOLTI SU BOBINA CON PASSO TRA TERMINALI DI = 11.9 ± 0.2 mm



SUITABLE FOR SINGLE WIRE SEAL P/N 828905-1
 ADDETTO PER GOMMINO TE 828905-1

CUSTOMER DRAWING FOR INFORMATION ONLY
 DISEGNO PER CLIENTE SOLO PER RIFERIMENTO



INS. DIA. RANGE
(DIAM. ISOLANTE)

2

WIRE RANGE
(RANGO FILO)

0.1 - 1.5mm²

PRE-TIN
(PRE-STAGNATO)

BRASS
(OTTONE)

282225-1

FINISH/COLOUR
(FINITURE/COLORE)

MATERIAL
(MATERIALE)

PART NUMBER

DIMENSIONS:

mm

DWN
D. CHIACCHIO

11MAY1993

CHK
G. VIGNOLI

11MAY1993

APVD

PRODUCT SPEC

108-20117

APPLICATION SPEC

114-20067

WEIGHT

-

MATERIAL

-

FINISH

-



TE Connectivity

NAME

RECEPTACLE CONTACT .070 TYPE

-

SIZE

A 4

CAGE CODE

-

DRAWING NO

C-282225

RESTRICTED TO

-

CUSTOMER DRAWING

SCALE

5:1

SHEET

1 OF 1

REV

C1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[282225-1](#)