


Material	High Conductivity Seamless Copper Tube
Plating	Electro-Tin
Wire Size	2/0 STR/FLEX
Wire Type	Stranded Copper: Class B & C Compact, Class G, H, I, K, M, Locomotive
Wire Strip Length	1-9/16 in.
Stud Size	3/8 in.
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.
UL Temperature Rating	90° C
C.S.A Certified Wire Connector	Yes
Panduit Color Code on Barrel	BLACK
Panduit Die Index No. on Barrel	P45
Alternate Industry Die Index No. () on Barrel	(13)



Technical drawing of a Panduit LC BX2/0-38F connector. The drawing shows the front and side views. The front view is a rectangle with a circular feature in the center. The circular feature has a diameter dimension of $.41 \pm .02$ DIA. The text "PANDUIT" is on the left, and "2/0 STR/FLEX LC BX2/0-38F" is on the right. The side view shows the connector's profile with a "Wire inspection window" indicated. Dimensions include a vertical distance of $.96 \pm .04$ from the top edge to the center of the circular feature, and a horizontal distance of $.39 \pm .04$ from the left edge to the center of the circular feature.

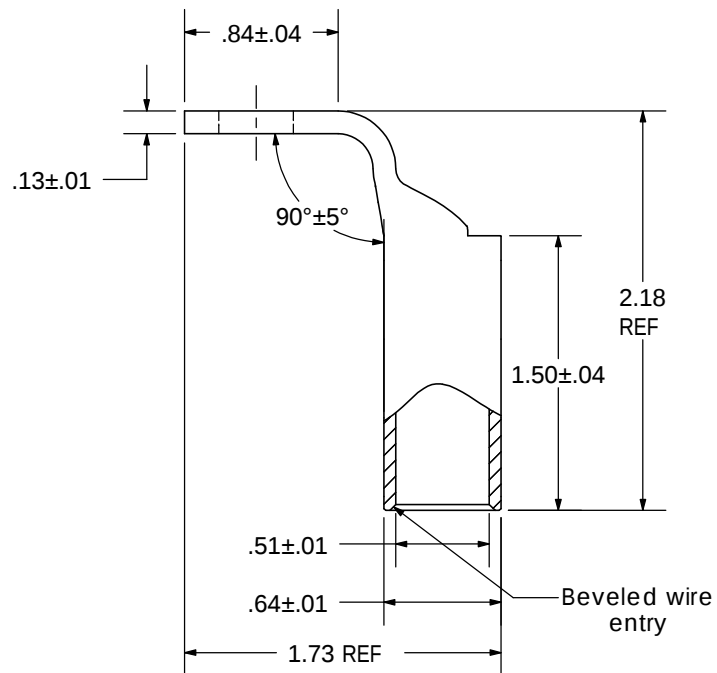

SCALE N/A	DRAWING NO / CAD FILE LCBX2 0-38F-CUST
--------------	---

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

[LCBX2/0-38F-X](#)