


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0764507107](#)
Status: **Active**
Overview: [Impact Backplane Connector and Cable Assembly System](#)
Description: Impact 100 Ohm 2 Pair Right-Angle Male Header, Left Guided, Right Endwall, 10 Columns, 60 Circuits, Pin Length 4.90mm, Plated Through Hole Dimension 0.39mm, Lead-Free

Documents:
[3D Model](#) [Application Specification AS-76060-990-001 \(PDF\)](#)
[Drawing \(PDF\)](#) [Application Specification AS-76060-9999-001 \(PDF\)](#)
[Product Specification PS-76060-999-001 \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification	
UL	E29179
General	
Product Family	Backplane Connectors
Series	76450
Application	Coplanar
Application Tooling Documents	TM-622018799
Component Type	PCB Header
Overview	Impact Backplane Connector and Cable Assembly System
Product Name	Impact
UPC	884982720312
Physical	
Circuits (Loaded)	60
Circuits (maximum)	60
Color - Resin	Black
Durability (mating cycles max)	200
First Mate / Last Break	No
Flammability	94V-0
Guide to Mating Part	Yes
Keying to Mating Part	None
Material - Metal	High Performance Alloy (HPA)
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	14.705/g
Number of Columns	10
Number of Pairs	2
Number of Rows	6
Orientation	Right Angle
PC Tail Length	1.20mm
PCB Locator	No
PCB Retention	Yes
PCB Thickness - Recommended	1.00mm
Packaging Type	Tray
Pitch - Mating Interface	1.90mm
Pitch - Termination Interface	1.90mm
Plating min - Mating	0.762µm
Polarized to PCB	Yes
Stackable	No
Temperature Range - Operating	-55° to +85°C
Termination Interface: Style	Through Hole - Compliant Pin

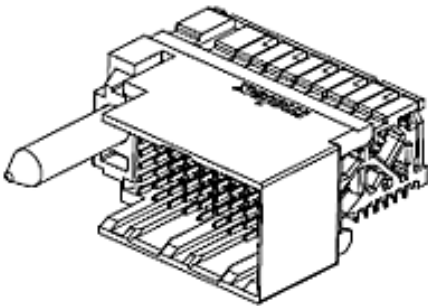

Series image - Reference only

EU ELV Not Relevant	
EU RoHS Compliant REACH SVHC Not Contained Per - ED/71/2019 (16 July 2019) Halogen-Free Status Low-Halogen For more information, please visit Contact US	China RoHS China ROHS ELV RoHS Phthalates
	Green Image Not Relevant Not Contained

Search Parts in this Series
[76450](#) Series

Mates With
[76460](#) Impact 100 Ohm Daughtercard

Application Tooling FAQ <i>Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.</i>	
Global	
Description	Product #
Press-in-Tool for Daughter Card Signal Module, 2-Pair by 10-Column Assemblies	622018778
Impact Right-Angle Module Removal Tool (RAM)	622024350

Electrical

Current - Maximum per Contact	0.75A
Data Rate	25.0 Gbps
Impedance	100Ω
Shield Type	N/A
Shielded	No
Voltage - Maximum	30V AC (RMS)/DC

Solder Process Data

Lead-freeProcess Capability	N/A
-----------------------------	-----

Material Info

Reference - Drawing Numbers

Application Specification	AS-76060-990-001, AS-76060-9999-001
Electrical Model Document	EE-76450-002, EE-76450-50G
Product Specification	PS-76060-999-001
S-Parameter Model	SP-76450-002, SP-76450-50G
Sales Drawing	SD-76450-002
Symbol/Footprint Data	SYM-76450-7107

This document was generated on 10/22/2019

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[76450-7107](#)