


SURFACE MOUNT HIGH REPEATABILITY, BROADBAND TO-5 RELAYS DPDT



SERIES	RELAY TYPE
SRF300	Repeatable, RF relay
SRF303	Sensitive, repeatable, RF relay

DESCRIPTION

The ultraminiature SRF300 and SRF303 relays are designed to provide a practical surface-mount solution with improved RF signal repeatability over the frequency range. These relays are engineered for use in RF attenuator, RF switch matrices, ATE and other applications that require dependable high frequency signal fidelity and performance.

The SRF300 and SRF303 feature:

- High repeatability
- Broader bandwidth
- Metal enclosure for EMI shielding
- High isolation between control and signal paths
- High resistance to ESD

The following unique construction features and manufacturing techniques provide excellent robustness to environmental


extremes and overall high reliability:

- Uniframe motor design provides high magnetic efficiency and mechanical rigidity
- Minimum mass components and welded construction provide maximum resistance to shock and vibration
- Advanced cleaning techniques provide maximum assurance of internal cleanliness
- Hermetically sealed
- Solder Dipped Leads, (RoHS compliant solder option available)






ENVIRONMENTAL AND PHYSICAL SPECIFICATIONS

Temperature (Ambient)	Storage	-65°C to +125°C
	Operating	-55°C to +85°C
Vibration (General Note I)		10 g's to 500 Hz
Shock (General Note I)		30 g's, 6ms half sine
Enclosure		Hermetically sealed
Weight	SRF300	0.09 oz. (2.55g) max.
	SRF303	0.16 oz. (4.5g) max.

INTERNAL CONSTRUCTION

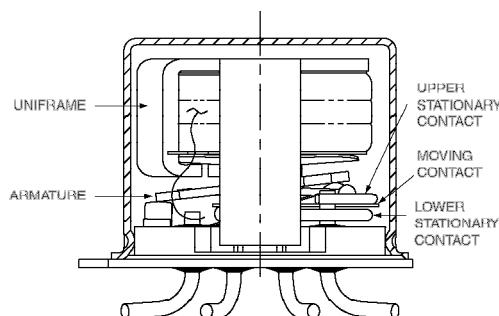

SERIES SRF300/SRF303
TYPICAL RF CHARACTERISTICS (See RF Notes)

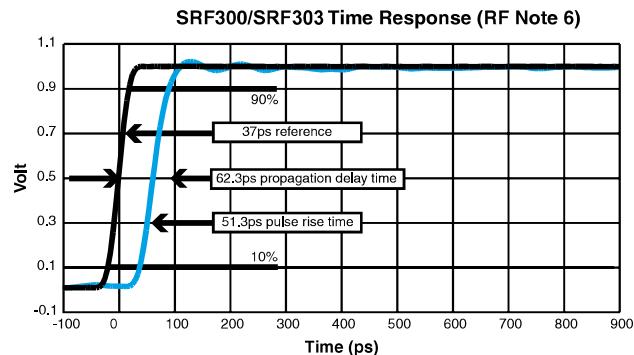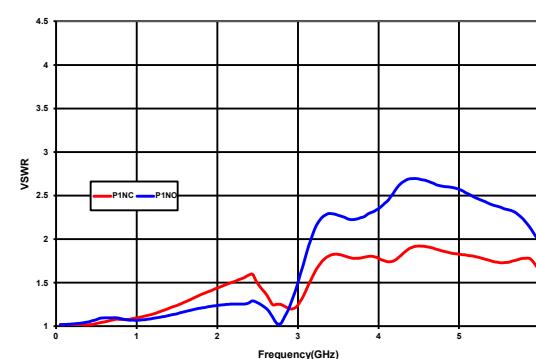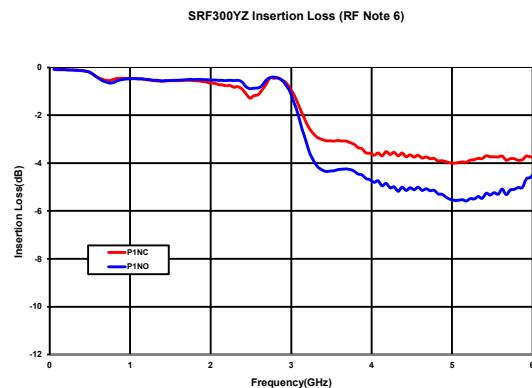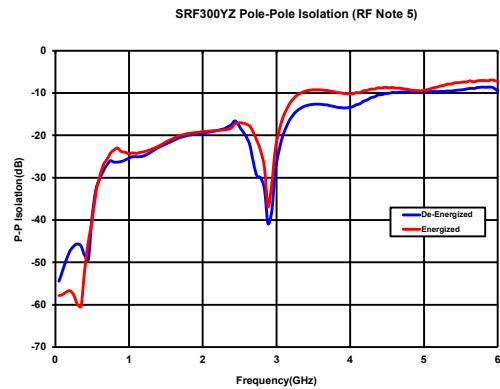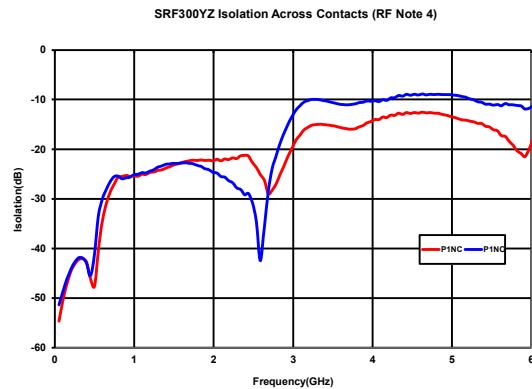

RF NOTES

1. Test conditions:
 - a. Fixture: .031" copper clad, reinforced PTFE, RT/duroid® 6002 with SMA connectors.
(RT/duroid® is a registered trademark of Rogers Corporation.)
 - b. RF ground shield is soldered to PCB RF ground plane.
 - c. Room ambient temperature.
 - d. Terminals not tested were terminated with 50-ohm load.
 - e. Contact signal level: -10 dBm.
 - f. No. of test samples: 2.
2. Data presented herein represents typical characteristics and is not intended for use as specification limits.
3. Data is per pole, except for pole-to-pole data.
4. Data is the average from readings taken on all open contacts.
5. Data is the average from readings taken on poles with coil energized and de-energized.
6. Data is the average from readings taken on all closed contacts.
7. Test fixture effect de-embedded from frequency and time response data.


SERIES SRF300/SRF303
GENERAL ELECTRICAL SPECIFICATIONS (@25°C)

Contact Arrangement	2 Form C (DPDT)				
Rated Duty	Continuous				
Contact Resistance	0.15 Ω max.				
Contact Load Rating	Resistive: 1Amp/28Vdc Low level: 10 to 50 μA @ 10 to 50 mV				
Contact Life Ratings	10,000,000 cycles (typical) at low level				
Coil Operating Power	SRF300-5: 500 mW @ nominal coil	SRF300-12: 370 mW @ nominal coil			
	SRF303-5: 250 mW @ nominal coil	SRF303-12: 169 mW @ nominal coil			
Operate Time	SRF300: 4.0 mS max. SRF303: 6.0 mS max.				
Release Time	SRF300: 3.0 mS max. SRF303: 3.0 mS max.				
Intercontact Capacitance	0.4 pf typical				
Insulation Resistance	1,000 MΩ min. between mutually isolated terminals				
Dielectric Strength	350 Vrms (60 Hz) @ atmospheric pressure				


DETAILED ELECTRICAL SPECIFICATIONS (@25°C)

BASE PART NUMBERS (SRF300)		SRF300-5	SRF300-12
Coil Voltage, Nominal (Vdc)		5.0	12.0
Coil Resistance (Ohms ±20%)	SRF300	50	390
Pick-up Voltage (Vdc max.)	SRF300	3.6	9.0

BASE PART NUMBERS (SRF303)		SRF303-5	SRF303-12
Coil Voltage, Nominal (Vdc)		5.0	12.0
Coil Resistance (Ohms ±20%)	SRF303	100	850
Pick-up Voltage (Vdc max.)	SRF303	3.6	9.0

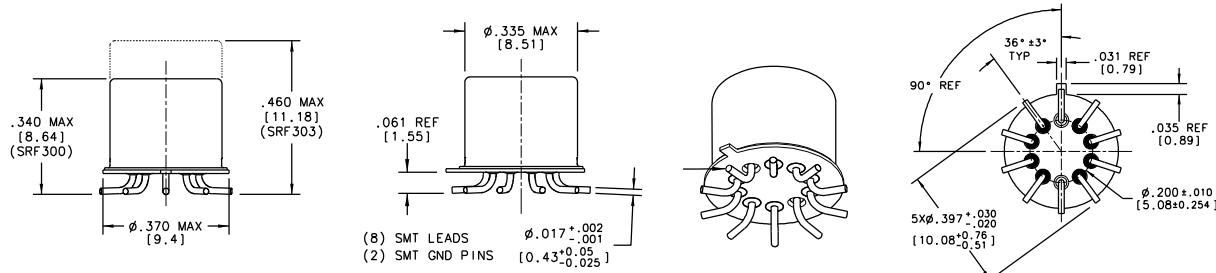SERIES SRF300/SRF303
OUTLINE DIMENSIONS


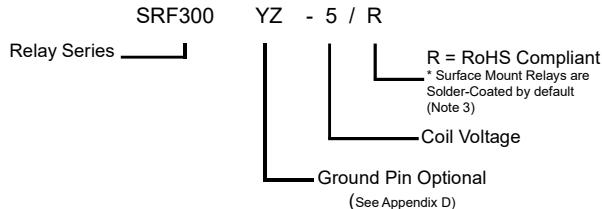
(Viewed From Terminals)

SCHEMATIC DIAGRAMS


SRF300/RF303

NOTES:

1. DIMENSIONS ARE IN INCHES, METRIC EQUIVALENTS SHOWN IN ().
2. POSITIONS 5 AND 10 ARE FOR UNINSULATED CASE GROUND OPTIONS.
3. NO PROTRUSION BELOW BOTTOM OF HEADER WHEN GROUND PINS ARE INSTALLED
4. TO ORDER THE CASE GROUND OPTION, AFTER THE SERIES DESIGNATOR, ADD "Y" TO THE PART NUMBER FOR POSITION 5 OR "Z" TO THE PART NUMBER FOR POSITION 10.

Teledyne Part Numbering System for SRF300/SRF303 Relays

NOTES:

- ¹ Standard Relay lead finish: Solder-Dipped Leads (Sn60/Pb40)
- ² For RoHS Solder, add /R at end of part number. EX: SGRF303-5/R
- ³ RoHS Solder: (Sn99.3/Cu0.7)


³ The slash and characters appearing after the slash are not marked on the relay.

GENERAL NOTES

- I. Relays will exhibit no contact chatter in excess of 10 μ sec or transfer in excess of 1 μ sec.
- II. For reference only. Coil resistance not directly measurable at relay terminals due to internal series diode.


SERIES SRF300/SRF303
TYPICAL SIGNAL INTEGRITY CHARACTERISTICS @ 10 Gbps

Normally Closed (Typ.)

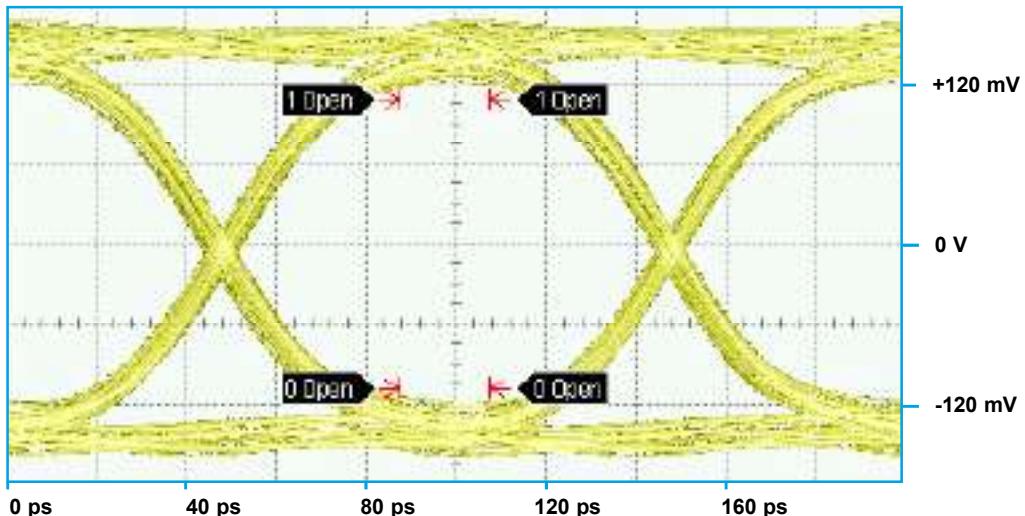

Bit Rate	Eye Height	Eye Width	Jitter _{P-P}
10 Gbps	137.9 mV	85.83 ps	13.33 ps

Normally Open (Typ.)

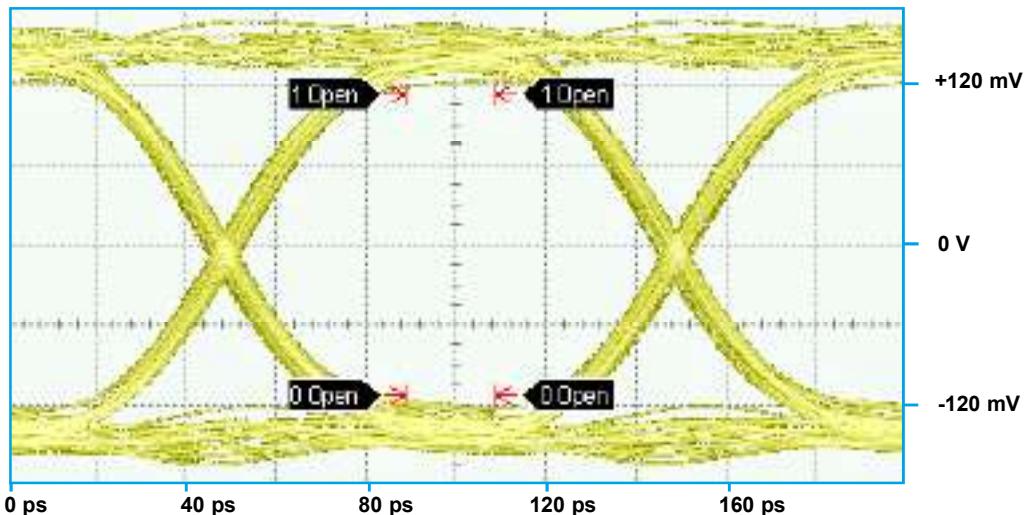


Bit Rate	Eye Height	Eye Width	Jitter _{P-P}
10 Gbps	72.8 mV	88.1 ps	8.00 ps

PATTERN GENERATOR SETTINGS

- 10 Gbps Random Pulse Pattern Generator
- $2^{31} - 1$ PRBS signal
- PRBS output of 300 mV_{P-P} (nominal)
- RF PCB effect (negligible) not removed from measurement
- Data shown is typical of both poles

SERIES SRF300/SRF303
TYPICAL SIGNAL INTEGRITY CHARACTERISTICS @ 18 Gbps

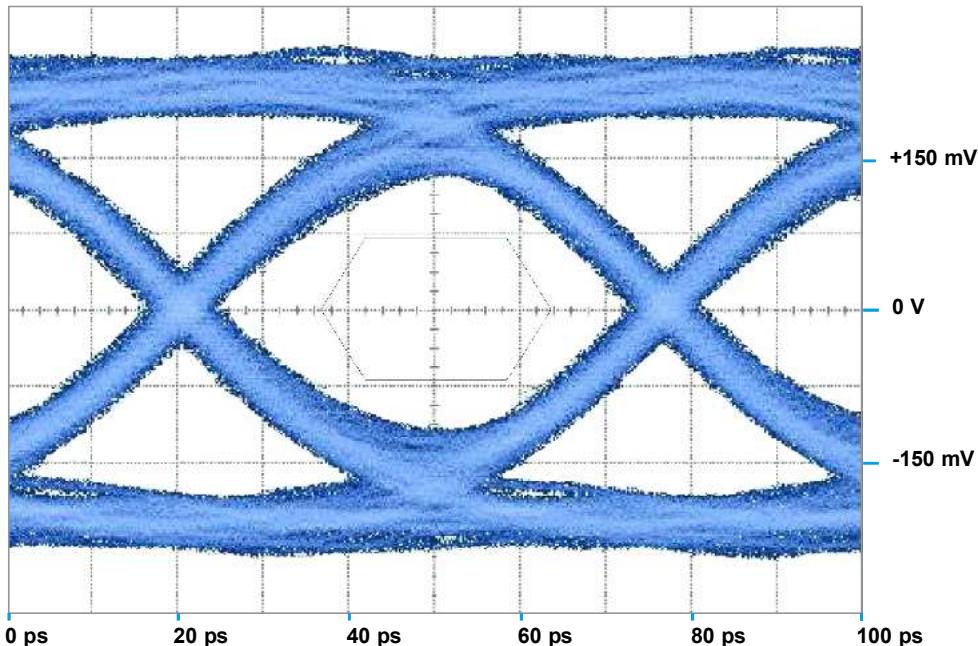

Bit Rate	Eye Height	Eye Width	Jitter _{P-P}
18 Gbps	185 mV	46.4 ps	10.44 ps

PATTERN GENERATOR SETTINGS

- 18 Gbps Random Pulse Pattern Generator
- $2^{31} - 1$ PRBS signal
- PRBS output of 300 mV_{P-P} (nominal)
- RF PCB effect (negligible) not removed from measurement
- Data shown is typical of both poles

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Teledyne Relays:

[SRF300-5](#) [SRF303-5](#) [SRF300-12](#) [SRF303-12](#) [SRF300-12/G](#) [SRF300-26](#) [SRF300-5/G](#) [SRF300Y-12](#) [SRF300Y-5](#)
[SRF300YZ-12](#) [SRF300YZ-12/G](#) [SRF300YZ-5](#) [SRF300YZ-5/G](#) [SRF300Z-5](#) [SRF303-12/G](#) [SRF303-26](#) [SRF303-5/G](#)
[SRF303Y-12](#) [SRF303Y-5](#) [SRF303YZ-12](#) [SRF303YZ-12/G](#) [SRF303YZ-5/G](#) [SRF303Z-5](#) [SRF303XYZ-12](#) [SRF303X-12/R](#) [SRF303DY-12](#) [SRF303DXYZ-5](#) [SRF303DY-5](#) [SRF303Z-5/R](#) [SRF303DZ-5/R](#) [SRF303X-12](#) [SRF303XYZ-12/R](#)
[SRF303Y-5/R](#) [SRF303YZ-12/R](#) [SRF303DX-5/R](#) [SRF303DZ-5](#) [SRF303Y-12/R](#) [SRF303DYZ-12](#) [SRF303DYZ-5](#)
[SRF303DYZ-5/R](#) [SRF303Z-12/R](#) [SRF303DXYZ-12](#) [SRF303DX-5](#) [SRF303YZ-5/R](#) [SRF303XYZ-5/R](#) [SRF303DYZ-12/R](#) [SRF303Z-12](#) [SRF303XYZ-5](#) [SRF303DZ-12](#) [SRF303DY-5/R](#) [SRF303DXYZ-5/R](#) [SRF303DXYZ-12/R](#)
[SRF303DY-12/R](#) [SRF303DX-12](#) [SRF303DX-12/R](#) [SRF303DZ-12/R](#) [SRF303X-5](#) [SRF303](#)