




1. RECOMMENDED SPARE PARTS.
2. GREASE RAM, CAM, CAM FOLLOWER AND FEED ROD LIGHTLY.
3. LUBRICATE DAILY PER THE APPLICATOR INSTRUCTION SHEET SUPPLIED WITH THE APPLICATOR.
4. 1.5mm NOMINAL INSULATION CRIMP HEIGHT.
5. CRIMP DATA QUOTED ON THIS LOG IS AS SPECIFIED BY CUSTOMER AND NOT AS CALCULATED BY AMP.

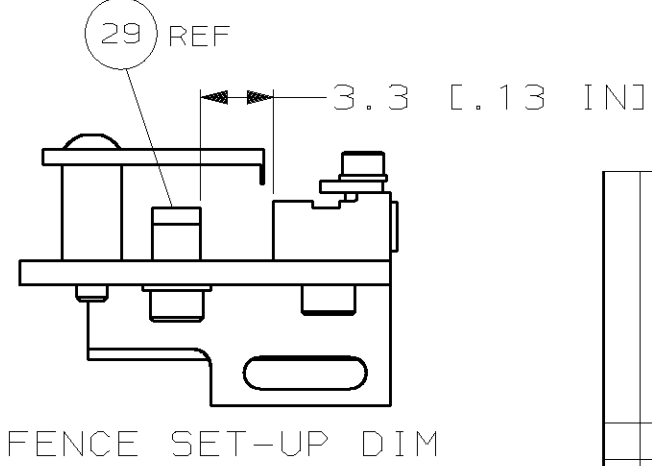

FENCE SET-UP DIM

		DIMENSIONS: mm (INCHES)		MATERIAL		HT TR		FIN	
		DO NOT SCALE PRINT.							
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DR 195EP00		APP 195EP00		 AMP Incorporated Harrisburg, PA 17109-3608	
		1 PLC DEC +0.5 [0.2 IN]		M CLIFFORD		F BACKHURST			
		2 PLC DEC ±		CHK 03-11-00		REL 03-11-00			
		3 PLC DEC ±		L. LOTHOUSE		M. CLIFFORD			
		ANGLES ±		NAME		SIDE FEED HD-1 APPLICATOR			
8 CMR JUL03		SURF TEXTURE: ✓		SCALE		1426090			
0 MC NOV00		REMOVE BURRS, BREAK		D		DWG NO			
APP DATE		SHARP EDGES R0.38 MAX				1 OF 1			
		CAGE CODE		CUSTOMER AND ASSEMBLY DRAWING				RESTRICTED TO	
		00779						-	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1426090-1](#)