
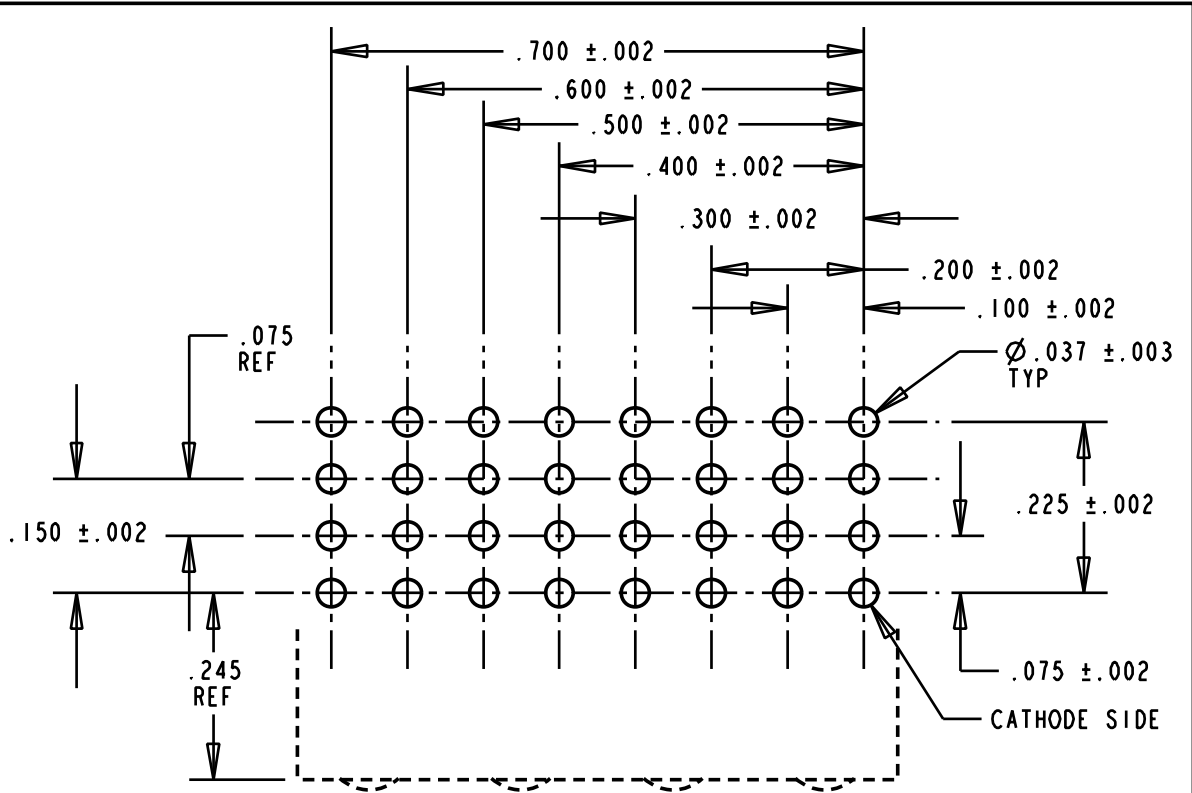




LED COLOR = GREEN TINTED NON-DIFFUSED					
OPERATING CHARACTERISTICS AT 25°C AMBIENT					
CHARACTERISTICS	MIN	TYP	MAX	UNITS	TEST CONDITIONS
LUMINOUS INTENSITY	32		50	mcd	I _F = 10 mA
FORWARD VOLTAGE		2.1	2.8	V	I _F = 20 mA
REVERSE CURRENT			100	uA	V _R = 5 V
PEAK WAVELENGTH		565		nm	
VIEWING ANGLE	45			Degree	

LED COLOR	
POS. 1	GREEN
POS. 2	GREEN
POS. 3	GREEN
POS. 4	GREEN

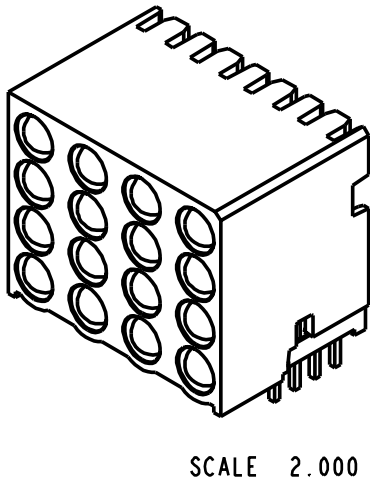

RECOMMENDED HOLE PATTERN

- NOTES:
- 1- LEADS TO FIT INTO HOLES SPACED AS PER HOLE PATTERN
 - 2- LEADS TO BE FREE OF DEFORMATION AFTER BENDING AND CUTTING
 - 3- .020 SQ. NOM. (POS. 1-3)
.024 X .020 NOM. (POS. 4)
 - 4- PACKAGING =
BLOCKS PLACED IN CLEAR ANTISTATIC TUBE = 28 BLOCKS/TUBE
 - 5- DIALIGHT PART NUMBER = 568-0016-801

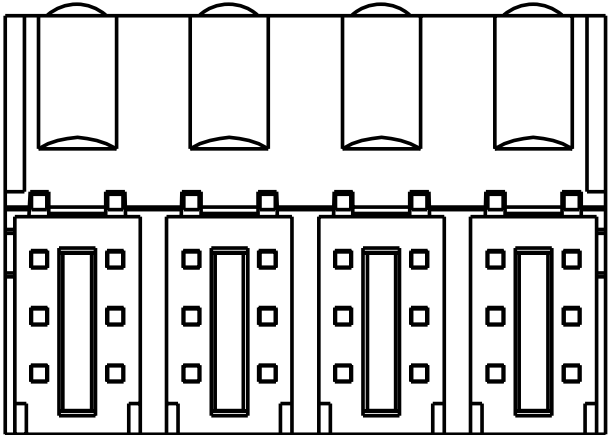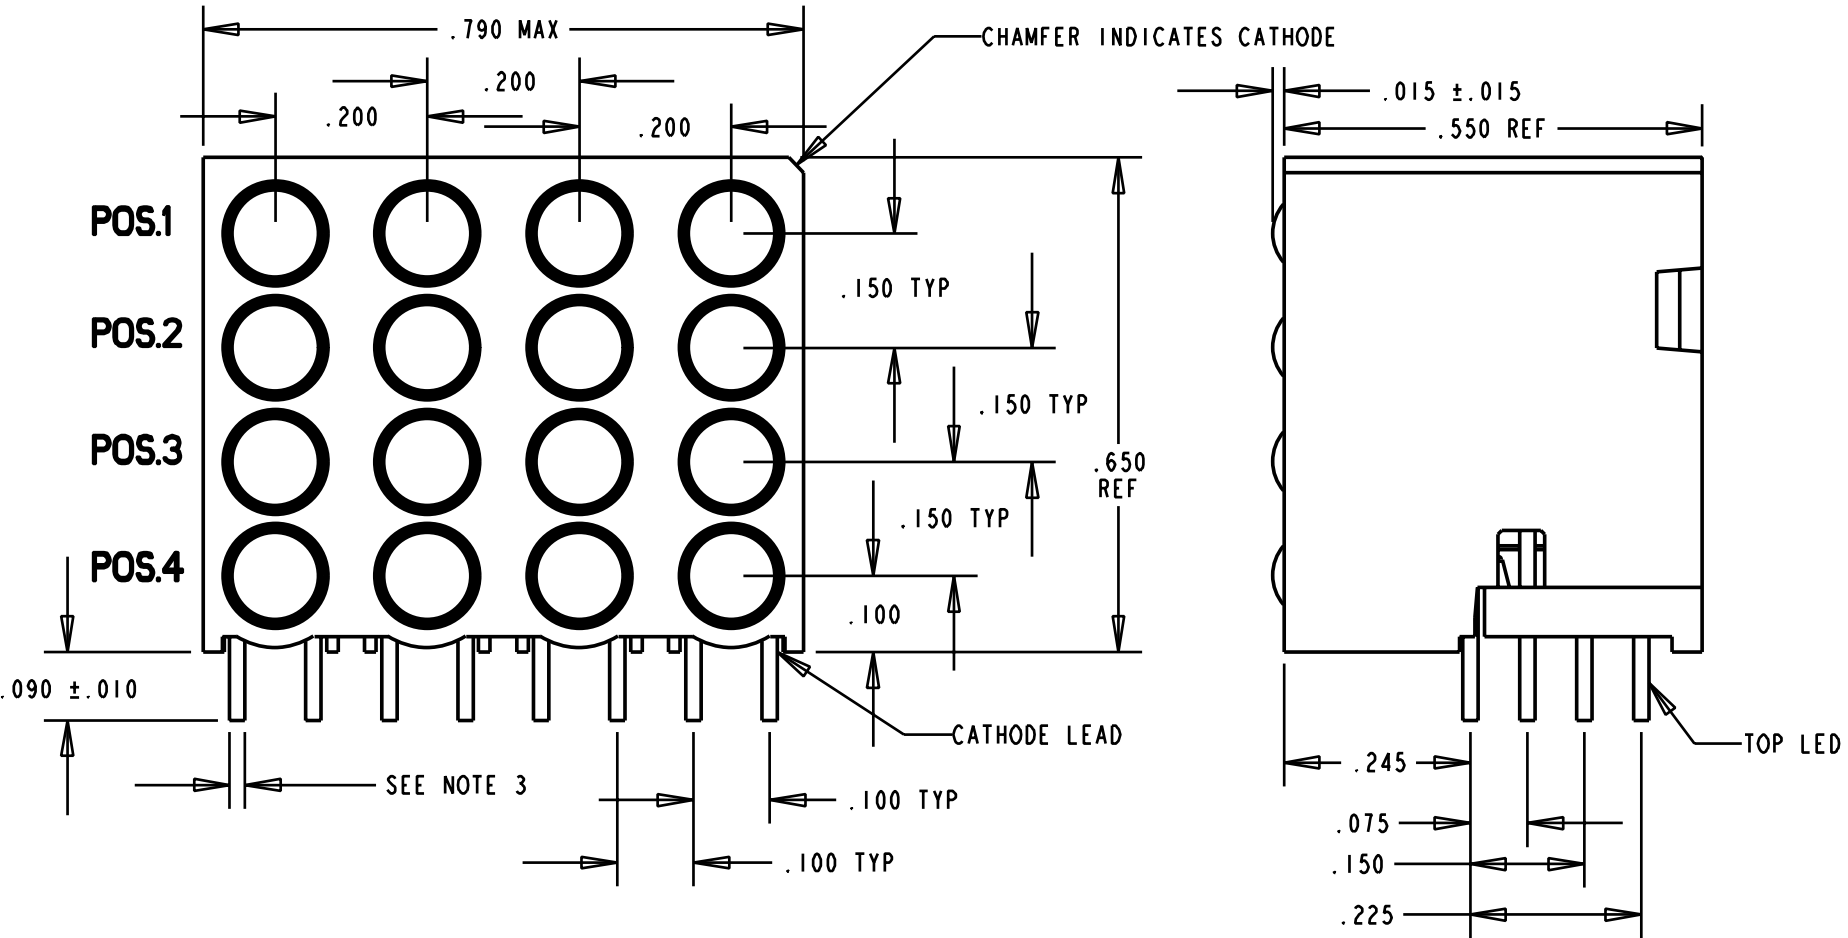

THIS DRAWING AND THE CONTENTS HEREIN ARE CONFIDENTIAL AND THE SOLE PROPERTY OF DIALIGHT. REPRODUCTION OF THIS DRAWING OR CONSTRUCTION OF ANY PARTS WITHIN THIS DRAWING ARE FORBIDDEN WITHOUT THE WRITTEN CONSENT OF DIALIGHT.

SCALE 4:1 ALL DIM'S IN: INCHES (MM)		DRAWING NUMBER	REV
TOLERANCES: UNLESS OTHERWISE SPECIFIED FRACTIONS: ±1/64 DECIMALS (.XX): ±.020 DECIMALS (.XXX): ±.010 DECIMALS (.XXXX): ANGLES: ±1°		C-16282	G
FINISH:		TITLE (4X4) CBI BLOCK	
FSCM 83330		MATERIAL	
		Dialight	1501 ROUTE 34 SOUTH FARMINGDALE, NJ 07727
		SHEET OF	FAMILY TABLE:

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Dialight:

568-0016-801F