

40-60W Single, Dual & Triple Output DIN Mount DC-DC Converters

Features

- ◆ DIN Rail Mount Version of TDK-Lambda's PX Series
- ◆ 1600VDC Input to Output Isolation
- ◆ Wide Operating Temperature Range
- ◆ Internally Protected
- ◆ All In One Package



Key Market Segments & Applications



Industrial




RoHS

Specifications			DPX40	DPX60
Max Output Power	W		40W	60W
Efficiency	%		85% typical at nominal input & full load	
Voltage Accuracy	%		Single, Dual & Triple Main $\pm 1\%$, Triple auxiliaries $\pm 5\%$	
Volt. Adjust. (Single Output Only)	%		$\pm 10\%$	
Minimum Load, each output (1)	%		Single output 0%, Dual & Triple outputs 10%	
Line Regulation	%		Single / Dual $\pm 0.5\%$, Triple (main) $\pm 1\%$, (auxiliaries) $\pm 5\%$	
Load Regulation (10% to 100%)	%		Single $\pm 0.5\%$, Dual $\pm 1\%$, Triple (main) $\pm 2\%$, (auxiliaries) $\pm 5\%$	
Cross Regulation (25% to 100%)	%		Triple (main) $\pm 1\%$, Dual / Triple (auxiliaries) $\pm 5\%$	
Start up time	ms		100ms typ.	
Remote on/off (ref. to neg. input)	-		Positive Logic: ON: Open or 3.5-12V, OFF: Short or <1.2V	
Temperature Coefficient	%/°C		$< \pm 0.02\%/^{\circ}\text{C}$	
Operating Temperature	°C		-40 to 85°C, derate linearly to 20% load from 60°C to 85°C	
Storage Temperature	°C		-40 to 85°C	
Thermal Shock	-		MIL-STD-810D	
Relative Humidity	%RH		5 to 95%RH (non condensing)	
Trans. Resp.(25% step load chng.)	ms		250 μ s recovery	
Overvolt. Protection (Zener clamp)	-		5V: 6.2V, 12V: 15V, 15V: 18V	
Overcurr. & Short Circuit Protection	-		Typically at 150%, hiccup with self recovery	
Input Surge Volt. (Max. for 100ms)	-		12V input: 36V, 24V input: 50V, 48V input: 100V	
Isolation Voltage	VDC		1600VDC minimum	
Isolation Resistance	Ω		10^9 Ohms minimum	
Typical Switching Frequency (Fixed)	kHz		300kHz (typ)	
Shock & Vibration	-		MIL-STD-810F	
Conducted & Radiated Emissions	-		EN55022 Level B	
Immunity	-		EN61000-4-2, -3, -4, -5, -6 Pref Criteria A	
Safety Agency Approval	-		CE Mark	
Size (W x H x L)	in(mm)		0.96 x 2.27 x 4.92" (24.5 x 57.6 x 125mm)	
Weight	g		182g	
Warranty	yrs		Two Years	

1. No load operation will not damage the unit

Outline Drawing

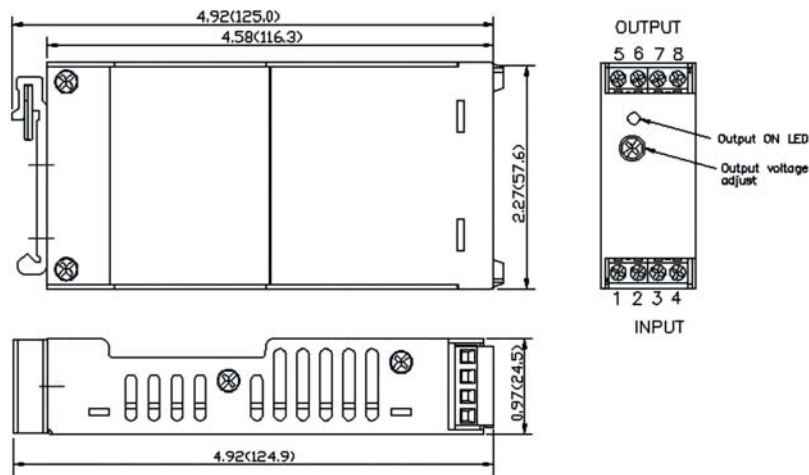

Model Selector

Output Voltage (V)	Output Current (A)	Input Voltage (VDC)	Model	Ripple & Noise (Pk to Pk mV)	Max Load Cap (uF)
Single Outputs					
5V	8A	9.5 - 36VDC	DPX4024WS05	50mV	13600uF
12V	3.33A	9.5 - 36VDC	DPX4024WS12	75mV	2360uF
15V	2.67A	9.5 - 36VDC	DPX4024WS15	75mV	1510uF
5V	8A	18 - 75VDC	DPX4048WS05	50mV	13600uF
12V	3.33A	18 - 75VDC	DPX4048WS12	75mV	2360uF
15V	2.67A	18 - 75VDC	DPX4048WS15	75mV	1510uF
5V	12A	18 - 36VDC	DPX6024S05	75mV	20400uF
12V	5A	18 - 36VDC	DPX6024S12	100mV	3550uF
15V	4A	18 - 36VDC	DPX6024S15	100mV	2300uF
5V	12A	36 - 75VDC	DPX6048S05	75mV	20400uF
12V	5A	36 - 75VDC	DPX6048S12	100mV	3550uF
15V	4A	36 - 75VDC	DPX6048S15	100mV	2300uF
Dual Outputs					
±12	1.667A	9.5 - 36VDC	DPX4024WD12	120mV	±1200uF
±15	1.333A	9.5 - 36VDC	DPX4024WD15	150mV	±1510uF
±12	1.667A	18 - 75VDC	DPX4048WD12	120mV	±1200uF
±15	1.333A	18 - 75VDC	DPX4048WD15	150mV	±1510uF
Triple Outputs					
+5V, ±12V	6, ±0.4A	9.5 - 18VDC	DPX4012T0512	50 / 75mV	6800uF, ±330uF
+5V, ±15V	6, ±0.3A	9.5 - 18VDC	DPX4012T0515	50 / 75mV	6800uF, ±110uF
+5V, ±12V	6, ±0.4A	18 - 36VDC	DPX4024T0512	50 / 75mV	6800uF, ±330uF
+5V, ±15V	6, ±0.3A	18 - 36VDC	DPX4024T0515	50 / 75mV	6800uF, ±110uF
+5V, ±12V	6, ±0.4A	36 - 75VDC	DPX4048T0512	50 / 75mV	6800uF, ±330uF
+5V, ±15V	6, ±0.3A	36 - 75VDC	DPX4048T0515	50 / 75mV	6800uF, ±110uF

Pin Connection

PIN	SINGLE	DUAL	TRIPLE
1	Ctrl	Ctrl	Ctrl
2	VIN (-)	VIN (-)	VIN (-)
3	VIN (-)	VIN (-)	VIN (-)
4	VIN (+)	VIN (+)	VIN (+)
5	NC	NC	Aux (+)
6	VOUT (-)	VOUT (-)	Common
7	VOUT (+)	Common	Aux (-)
8	NC	VOUT (+)	VOUT (+)

Other Industrial Products

DPP / DSP	10W to 960W, 5V to 48V power supplies
DLP	75W to 240W, 24V power supplies
DLP-PU	Redundancy Module (20A)
R Series	6A to 30A, single and three phase EMI filters

For Additional Information, please visit
us.tdk-lambda.com/lp/products/dpx-series.htm



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TDK-Lambda:](#)

[DPX4024WD12](#) [DPX4024WD15](#) [DPX4024WS05](#) [DPX4024WS12](#) [DPX4024WS15](#) [DPX6024S12](#) [DPX6024S15](#)
[DPX6048S12](#) [DPX4012T0512](#) [DPX4012T0515](#) [DPX4024T0512](#) [DPX4024T0515](#) [DPX4048T0512](#) [DPX4048T0515](#)
[DPX4048WD12](#) [DPX4048WS05](#) [DPX4048WS12](#) [DPX4048WS15](#) [DPX6024S05](#) [DPX6048S05](#) [DPX6048S15](#)
[DPX4048WD15](#)