


COIL: @ +25°C
 RESISTANCE 700 OHMS ± 10%
 NOMINAL VOLTAGE 26.5 VDC
 MUST OPERATE 13.5 VDC
 MUST RELEASE 1.5 VDC

ENVIRONMENT:
 VIBRATION 10 CPS TO 3000 CPS AT 30 g's
 SHOCK 100 g's 6 ± 1 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES:

CUSTOMER DATA SHEET

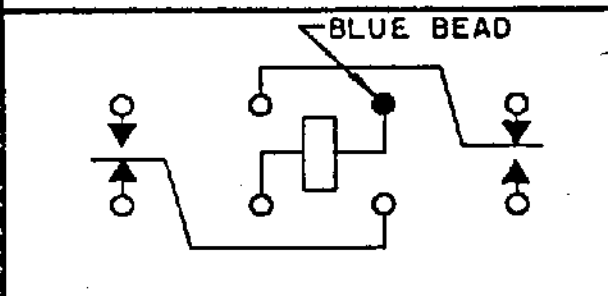

CONTACT RATING: Low Level
2 AMPS, 28 VDC 100,000
Operations

DR. 10-2-86 CK. JMB



CUST. CII STD.
 CUST. NO. 39016/6-209P

TYPE HFW RELAY

HFW 1201 K46P

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[HFW1201K46P](#)