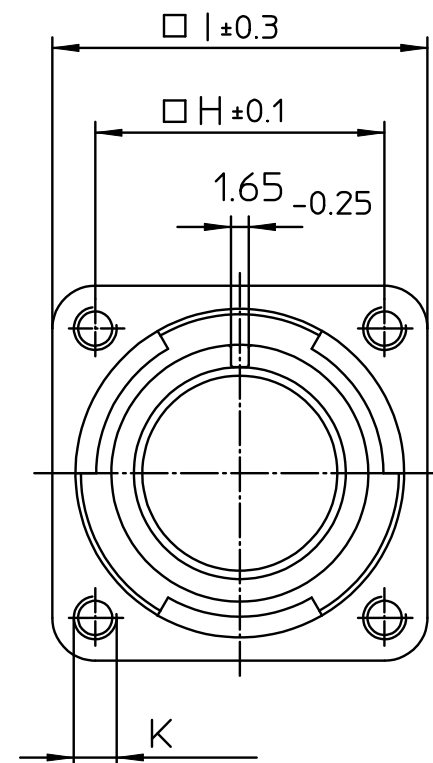
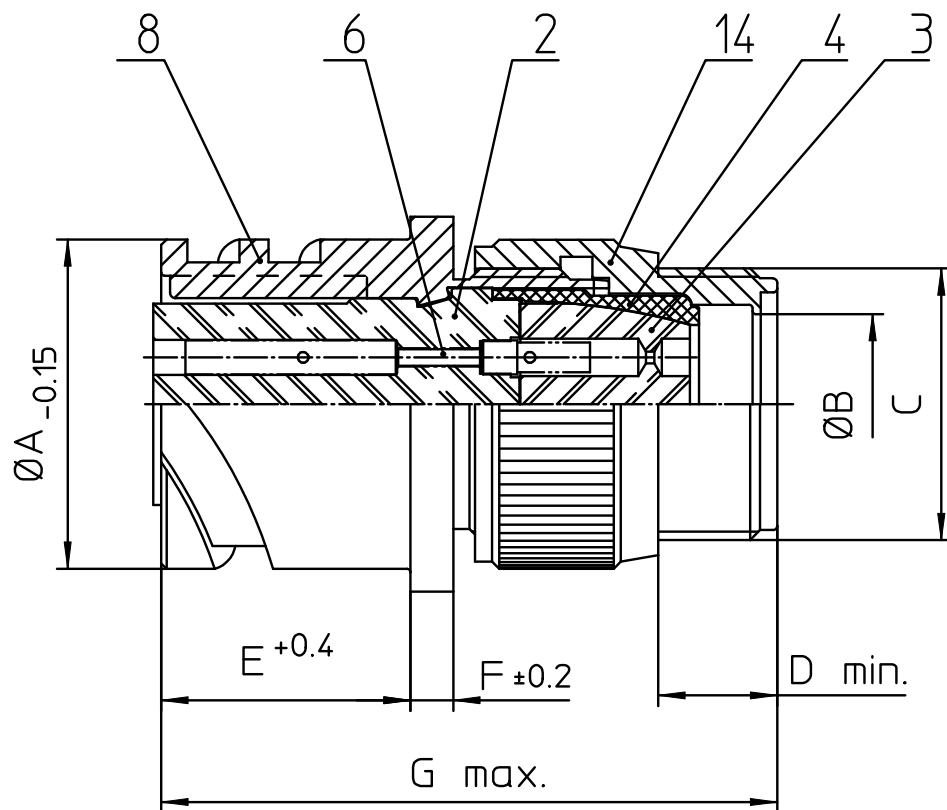


| NO. | MASSE / DIMENSION |
|-----|-------------------|
| A   | 24.6              |
| B   | 11.1              |
| C   | 3/4-20UNEF-2A     |
| D   | 9.5               |
| E   | 18.2              |
| F   | 3.2               |
| G   | 50                |
| H   | 23                |
| I   | 30                |
| K   | M4                |

| NO. | BESCHREIBUNG / DESCRIPTION              |
|-----|-----------------------------------------|
| 2   | ISOLIERKÖRPER BUCHSE / INSULATOR SOCKET |
| 3   | DICHTKÖRPER / GROMMET                   |
| 4   | ENDRING / ENDRING                       |
| 6   | KONTAKTBUCHSE / CONTACT SOCKET          |
| 8   | DOSENGEHÄUSE / SHELL                    |
| 14  | F-ENDGEHÄUSE / F-ENDBELL                |

Note: Due to an automatic nomenclature system, numbers generated may not be sequential.  
 Specification and Dimensions subject to change  
 Drawings illustrate normal insulator positioning

|                         |                                               |
|-------------------------|-----------------------------------------------|
| Material Specification: |                                               |
| Shell Material:         | Aluminium alloy                               |
| Shell Plating:          | Olive drab chromate over cadmium (conductive) |
| Insulator Material:     | CR-Elastomere                                 |
| Contact Material:       | Copper alloy                                  |
| Contact Plating:        | Hard silver                                   |

all dimensions are in mm  
 Dimensions without tolerance indications are general tolerances in acc. with DIN7168m

drawing for  
 CUSTOMER



description CA3100F14S-5S-B  
 Wall mounting receptacle  
 Endbell for flex tube  
 Solder Cup / Socket / Layout: 14S-5

© All rights reserved. Reproduction or issue to third in any form  
 whatever is only permitted with written authorization of ITT Cannon



page 1/1  
 revision 1862 1. Jul 20